The GuardDog self-closing safety gate

THE GUARDDO

SELF-CLOSING SAFETY GATE

Description

The GuardDog Safety Gate is designed to match top and mid-rail heights of OSHA compliant quardrails, providing maximum opening coverage

When the gate is installed with the top rail at OSHA's mandated guardrail height of 42" above the work surface, the bottom rail of the gate is at OSHA's nominal mid-rail height of 21".

The gates come in five nominal sizes ranging from 15" to 48". Each gate size can be laterally adjusted up to 6" (-3" to +3") to ensure proper fitting in the opening. To board adaptor kits are available for all sizes.



The new Self Stopping GuardDog Safety Gate installs and adjusts easily without the need for a gate stop.

Basic Use

The GuardDog Safety Gate system provides maximum opening coverage for OSHA compliant quardrails.

OSHA Compliance

The gate system features a uniquely strong single-pull, double latching mechanism that complies with OSHA regulations.

Features

- Tough, durable and easy to install
- Universal Hinge Assembly fits various railing types up to 2" 0.D. or flat surface mounting. Adapter kits are available for larger or uniquely shaped railings
- ▶ Each gate is capable of swinging in either direction
- The self-closing feature employs two stainless steel torsion springs
- ▶ Five nominal sizes are available, and each is adjustable laterally up to 6"
- Available in three finishes: Powder Coat Safety Yellow, Hot-Dip Galvanized or 316 Stainless Steel. Special colors are available upon request
- The new Self Stopping GuardDog Safety Gate installs and adjusts easily without the need for a gate stop

esigned to match top and mid-rail heights of OSHA compliant guardrails, providing maximum opening coverage.


See reverse side for additional specifications and test results



Safety Product Specialists

p/f 866-503-7245 dakotasafety.com info@dakotasafety.com

Product Specifications

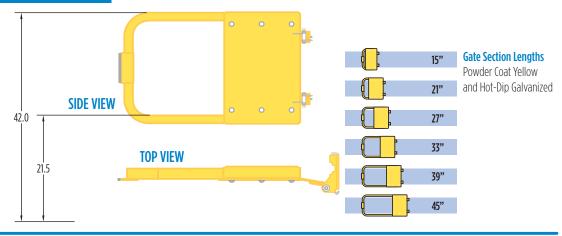

Self-Closing Gate: Approved product: GuardDog Self-Closing Safety Gate: Provide maximum opening coverage when used with OSHA compliant guard rails

Approved product: GuardDog Self-Closing Safety Gate: Provide maximum opening coverage when used with OSHA compliant guard rails

Standards: System shall have top and mid rail in accordance with OSHA Standards – 29 CFR 1910.23 (a)(2)

Width: As indicated in Drawing

Height: Top Rail: 42 inches (1067 mm), minimum; Bottom Rail: 21 inches (533 mm)

Railings: 14 GA tubing

Hardware: U-Bolts and Universal Hinge Assembly: Fits railing types up to 2 inches (51 mm) 0.D. or flat surface mounting, railing adaptor kit and self-closing springs

Finishes: Available in standard Powder Coat Yellow, Hot-Dip Galvanized and 316 Stainless Steel

New Self Stopping GuardDog Safety Gate

Our new Self Stopping GuardDog Safety Gate installs and adjusts easily without the need for a gate stop. This positive stopping mechanism is perfect for mezzanines and other areas which do not have adjoining structure.

> Self stopping action adjusts in seconds





Shown with "optional" Toe Board Kit

PROJECT:	
CONTRACTOR:	
DATE:	



p/f 866-503-7245 dakotasafety.com info@dakotasafety.com