



# PRODUCT GUIDE

**ECOFREEN**  
(주)에코프린

---

Ecofree Co., Ltd. based in Korea offers total solutions of Digital Textile Printing. With Innovative and creative solutions designed to meet the needs of customers, Ecofree delivers the industries most advanced, precise and reliable quality standards.

Ecofree assure the a very cost-efficient solution with consistent, reliable quality

The best solution for digital textile printing




**ECOFRIENDLY & ECONOMIC SOLUTIONS for DTG PRINTING !**

Ecofreen Co., Ltd. based in Korea offers total solutions of DTG Printing with the most diverse range of direct textile pretreatment equipments. With Innovative and creative solutions designed to meet the needs of customers, Ecofreen's Automatic Pretreatment Spray Machine delivers the industries most advanced, precise and reliable quality standards. Ecofreen assure you of the most ideal and practical solution with consistent, reliable and hassel free maintenance.



**Mister-T1**

**AUTOMATIC PRETREAT SPRAY MACHINE**

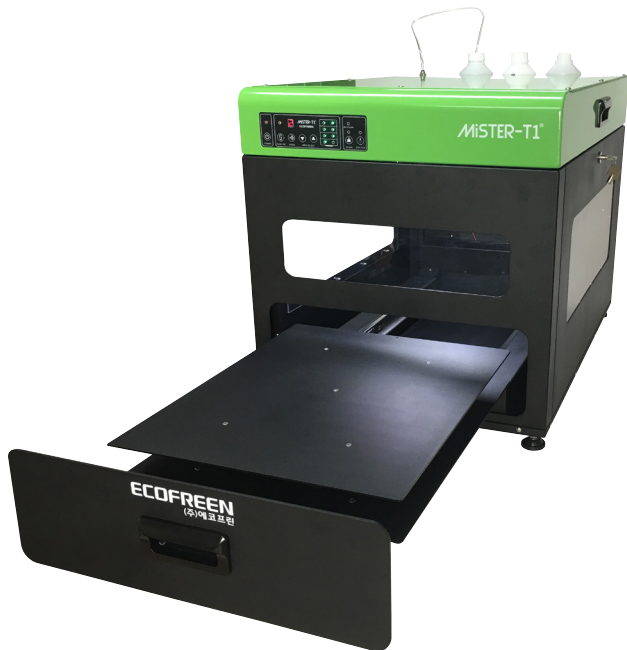

**PRINT BETTER GRAPHIC!**

**HASSLE FREE! & EASY MAINTENANCE!**

**AUTO NOZZLE CLEANING !**

**MAIN FEATURES**

- Fully Electric Version ( No Air Compressure Required )
- Rust Free Structures and Parts ( All Aluminum and Stainless Steel Structures)
- Hassel Free Anti Nozzle Drying or Clogging System with Capping Station
- Smart Auto Nozzle Cleaning and Flushing Program
- Consistent Spraying with Single Nozzle
- User Friendly Operation with Touch Control Panel
- Open Top Design with Easy Maintenance
- No Dripping of Liquids
- Bi-Directional Sparying Mode with Quick Pretreatment
- Adjustable 1~5 speeds and Spraying Liquid Volume ( 10~40ml )
- 12 Months Warranty
- Closed System, Ideal for the operation in a room

**SPECIFICATIONS**


Dimensions	560mm(W) x 800mm(L) x 590mm(H)
Weight	35Kgs
Platen Size	40cm x 50cm (16" x 20")
Number of Spray Nozzle	Single Nozzle
Maximum Spray Area	40cm x 50cm (16" x 20")
Spray Cycle Time	3 sec ~ 9 sec, by 1 to 5 speed
Power Supply	Free Voltage ( 100V~240V 50/60hz )
Power Consumption	60W
Packing Size	620mm(W) x 875mm(L) x 640mm(H)
Packing Weight	40Kgs
Liquid Consumption	With Minimum Speed : about 30ml With Maximum Speed : about 10ml



**Easy Control Panel**  
Speed(Volume) / Bi- or Uni- Directional Spray  
Auto Nozzle Cleaning Mode  
Spray Area Select




**Nozzle Capping Station**  
Automatic Nozzle Cleaning Every 3 hours and Nozzle Kept in Capping Station After Turning off to Prevent Nozzle Clogged

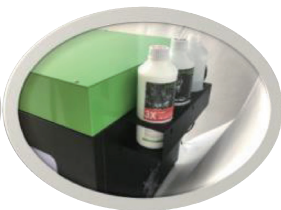


**1 liter liquid bottle holder**  
Easy to Switch Pretreatment Liquids



**Top Cover Open**  
for easy maintenance

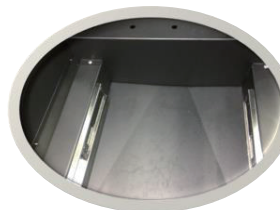

**Slant Basement**  
for smooth drainage

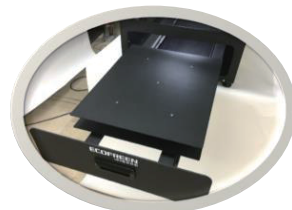

**40x50cm (16"x20") Size Platen**  
Thick hood jacket can be loaded