
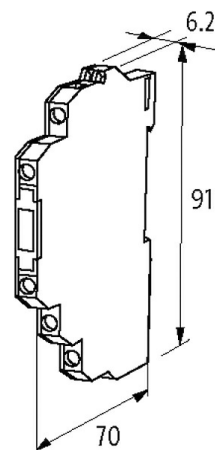
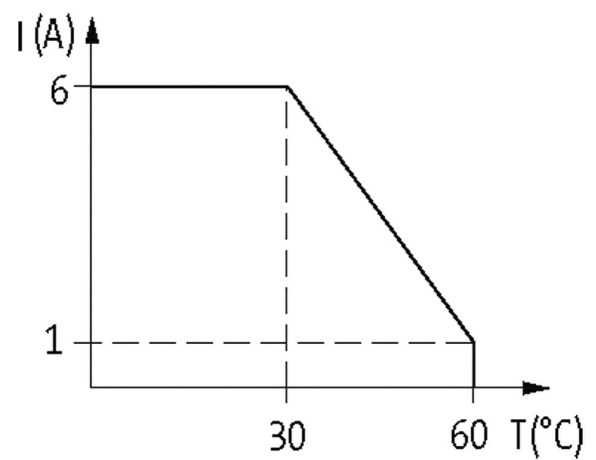
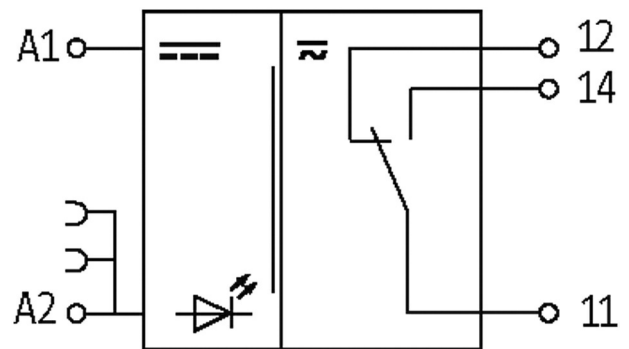


MIRO 6.2 24VDC-1U OUTPUT RELAY

IN: 24 VDC - OUT: 250 VAC/DC / 6 A

1 NO/NC contact
6 A
24 V DC
Screw terminals

[Link to Product](#)**Illustration**

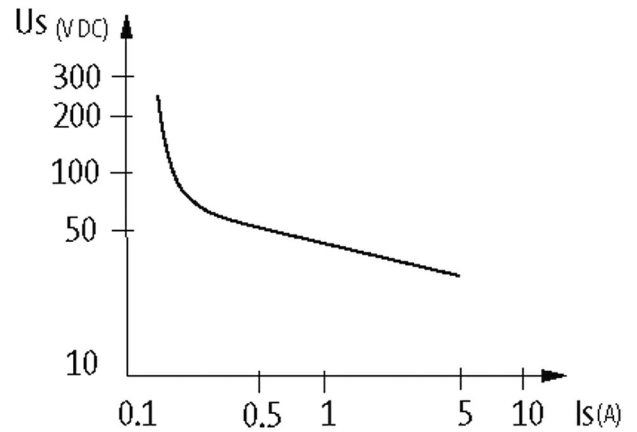

Product may differ from Image

Approvals



Input

| | |
|------------------------------|----------------------------------|
| Connection voltage - current | 24 V DC (19.2...30 V DC) - 14 mA |
| LED display | LED (green) |

Utilization category

| | |
|-------|---------------------------------------------------|
| AC-12 | 6 A (24/110/230 V AC) |
| AC-15 | 3 A (24/110/230 V AC) |
| DC-13 | 1 A (24 V DC); 0.2 A (110 V DC); 0.1 A (230 V DC) |

General data

| | |
|------------------------|--------------------------------------------|
| Mech./ elect. life | 20 000 000 switching cycles/load dependent |
| Test isolation voltage | 4 kV; safe separation (EN 60947-1) |
| Mounting method | DIN-rail mountable (EN 60715) |
| Temperature range | -25...+60 °C |
| Dimensions H×W×D | 91×6.2×70 mm |

Output

| | |
|----------------------------------|--------------------|
| Switching voltage | max. 250 V AC/DC |
| Switching current per output | max. 6 A |
| Min. load current | 100 mA (12 V DC) |
| Power rating (voltage dependent) | max. 1500 VA/120 W |
| Switching frequency | max. 10 Hz |

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 07/20

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

| | |
|--------------------------------------|--------------|
| Contact material | Ag Sn O2 |
| Energize/release/contact bounce time | 10/15/1.5 ms |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85364900 |
| EAN | 4048879027311 |
| eClass | 27371001 |
| Packaging unit | 1 |