RIMANTEC

AITTAC

PHV series



Specification

Operating pressure	0~9kgf/cm²(0~0.9MPa)		
Negative pressure	-750mmHg(10Torr)		
Proof pressure	1.5MPa		
Temperature range(°C)	0~60		
Applicable tubing	Nylon or Polyurethane		
Color	Grey/Black		

■ Table for interface port and tube O.D.

Product series	Port size				
	Ф6	Ф8	Ф10	Ф12	
PHV	•	•	•	•	


Symbol






Product feature

- 1. When the three-way valve is closed, the outlet pressure is released, which facilitates in commissioning and maintenance.
- 2. The finger valve has excellent flow characteristic and high sensitive unti-direction characteristic.



Inner structure

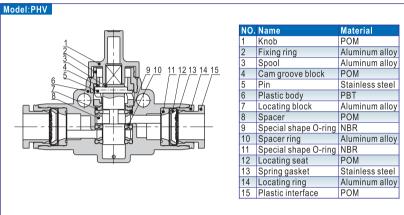

Dimensions


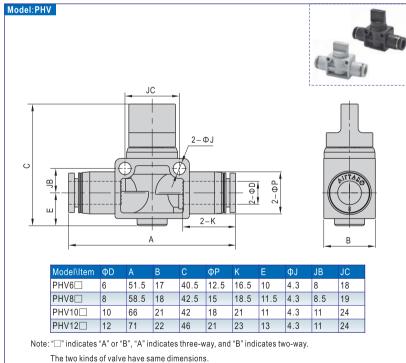


Diagram of finger valve in the open and closed states





Finger valve