


Proximity Sensors Inductive Thermoplastic Polyester Housing Types EI, AC, M 12, M 18, M 30

CARLO GAVAZZI

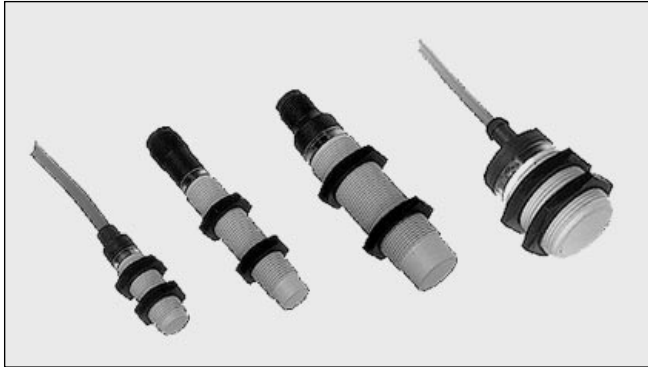

- Thermoplastic polyester housing, cylindrical
- Diameter: M 12, M 18, M 30
- Sensing distance: 2 to 15 mm
- Power supply: 20 to 250 VAC
- Output: SCR, make or break switching
- Protection: Overvoltage
- LED-indication for output ON
- Long or short housing
- 2 m cable or M 12 plug (double keyed)


Product Description

AC proximity switches constructed in rugged thermoplastic polyester housings. Sizes available are M 12, M18 and M 30. Length of housing is selectable with 30 mm thread

or 50 mm thread. Bright LED ring utilizing a yellow LED clearly gives indication of output status. Protection rating IP 67 ensures environmental compatibility.

Ordering Key

EI 1202 TBOPL-6

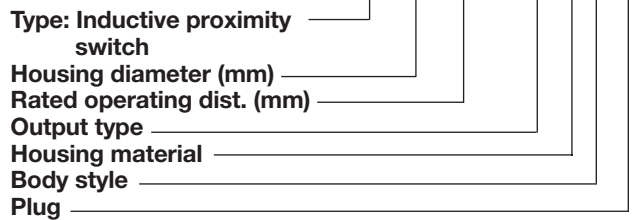

Type Selection AC Types, Cable and M 12 Plug

Housing diameter	Body style	Conne- ction	Rated operating dist. (S _n)	Ordering no. SCR Make switching	Ordering no. SCR Break switching
M 12	Long	Cable	2 mm ¹⁾	EI 1202 TBOPL	EI 1202 TBCPL
M 12	Long	Plug	2 mm ¹⁾	EI 1202 TBOPL-6	EI 1202 TBCPL-6
M 12	Long	Cable	4 mm ²⁾	EI 1204 TBOPL	EI 1204 TBCPL
M 12	Long	Plug	4 mm ²⁾	EI 1204 TBOPL-6	EI 1204 TBCPL-6
M 18	Short	Cable	5 mm ¹⁾	EI 1805 TBOPS	EI 1805 TBCPS
M 18	Short	Plug	5 mm ¹⁾	EI 1805 TBOPS-6	EI 1805 TBCPS-6
M 18	Long	Cable	5 mm ¹⁾	EI 1805 TBOPL	EI 1805 TBCPL
M 18	Long	Plug	5 mm ¹⁾	EI 1805 TBOPL-6	EI 1805 TBCPL-6
M 18	Short	Cable	8 mm ²⁾	EI 1808 TBOPS	EI 1808 TBCPS
M 18	Short	Plug	8 mm ²⁾	EI 1808 TBOPS-6	EI 1808 TBCPS-6
M 18	Long	Cable	8 mm ²⁾	EI 1808 TBOPL	EI 1808 TBCPL
M 18	Long	Plug	8 mm ²⁾	EI 1808 TBOPL-6	EI 1808 TBCPL-6
M 30	Short	Cable	10 mm ¹⁾	EI 3010 TBOPS	EI 3010 TBCPS
M 30	Short	Plug	10 mm ¹⁾	EI 3010 TBOPS-6	EI 3010 TBCPS-6
M 30	Long	Cable	10 mm ¹⁾	EI 3010 TBOPL	EI 3010 TBCPL
M 30	Long	Plug	10 mm ¹⁾	EI 3010 TBOPL-6	EI 3010 TBCPL-6
M 30	Short	Cable	15 mm ²⁾	EI 3015 TBOPS	EI 3015 TBCPS
M 30	Short	Plug	15 mm ²⁾	EI 3015 TBOPS-6	EI 3015 TBCPS-6
M 30	Long	Cable	15 mm ²⁾	EI 3015 TBOPL	EI 3015 TBCPL
M 30	Long	Plug	15 mm ²⁾	EI 3015 TBOPL-6	EI 3015 TBCPL-6

Short = 30 mm thread
Long = 50 mm thread
Make switching = Normally Open (NO)
Break switching = Normally Closed (NC)

¹⁾ For flush mounting in metal
²⁾ For non-flush mounting in metal



Specifications



Rated operational volt. (U_e)	24 to 240 VAC
(U_B)	20 to 265 VAC, 50 to 60 Hz
Rated operational current (I_e)	
Continuous	10 - 500 mA
Short-time	≤ 2.5 A, max. 20 ms
Minimum load current	10 mA
OFF-state current (I_r)	≤ 2 mA
Voltage drop (U_d)	≤ 8 VAC at max. load
Protection	Transients
Transient voltage	Level 3, 2.5 kV, acc. to IEC 60255-5 (500 Ω, 0.5 J) (prepared)
Power ON delay	≤ 100 ms
Frequency of operating cycles (f)	25 Hz
Indication for output ON	LED, yellow
Assured operating dist. (S_a)	$0 \leq S_a \leq 0.81 S_n$
Repeat accuracy (R)	≤ 5%
Hysteresis (H) (Differential travel)	3 to 20% of sensing distance

Effective operating dist. (S_r)	$0.9 \times S_n \leq S_r \leq 1.1 \times S_n$
Usable operating dist. (S)	$0.9 \times S_r \leq S_u \leq 1.1 \times S_r$
Ambient temperature	
Operating	-25° to +70°C (-13° to +158°F)
Storage	-30° to +80°C (-22° to +176°F)
Degree of protection	IP 67 (Nema 1, 3, 4, 6, 13)
Housing material	
Body	Grey thermoplastic polyester
Back	Black thermoplastic polyester
Connection	
Cable	2 m, 2 x 0.50 mm ² grey PVC, oil proof
Plug	M 12 x 1 (double keyed)
Cables for plug (-6)	CONH6A-xx
Weight (cable excluded)	
EI 12	60 g
EI 18	110 g
EI 30	180 g
Tightening torque	
EI 12	1.8 Nm
EI 18	2.6 Nm
EI 30	7.5 Nm


Dimensions

Type	A	B mm	C mm
EI 1202 TB..L	66	0	M 12 x 1 x 50
EI 1202 TB..L-6	74.5	0	M 12 x 1 x 50
EI 1204 TB..L	70	4	M 12 x 1 x 50
EI 1204 TB..L-6	78.5	4	M 12 x 1 x 50
EI 1805 TB..S	57	0	M 18 x 1 x 30
EI 1805 TB..S-6	55	0	M 18 x 1 x 30
EI 1805 TB..L	77	0	M 18 x 1 x 50
EI 1805 TB..L-6	75	0	M 18 x 1 x 50
EI 1808 TB..S	65	8	M 18 x 1 x 30
EI 1808 TB..S-6	63	8	M 18 x 1 x 30
EI 1808 TB..L	85	8	M 18 x 1 x 50
EI 1808 TB..L-6	83	8	M 18 x 1 x 50

Type	A	B mm	C mm
EI 3010 TB..S	59	0	M 30 x 1.5 x 30
EI 3010 TB..S-6	55.5	0	M 30 x 1.5 x 30
EI 3010 TB..L	79	0	M 30 x 1.5 x 50
EI 3010 TB..L-6	75.5	0	M 30 x 1.5 x 50
EI 3015 TB..S	87.5	12	M 30 x 1.5 x 30
EI 3015 TB..S-6	67.5	12	M 30 x 1.5 x 30
EI 3015 TB..L	91	12	M 30 x 1.5 x 50
EI 3015 TB..L-6	71	12	M 30 x 1.5 x 50

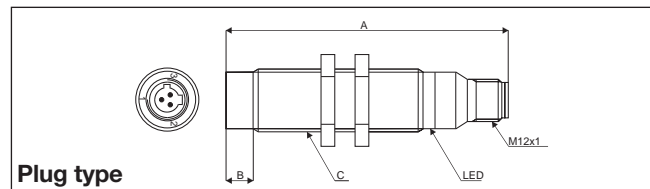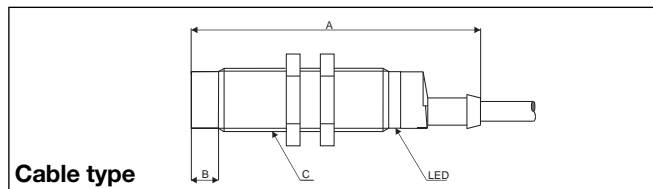

Wiring Diagrams

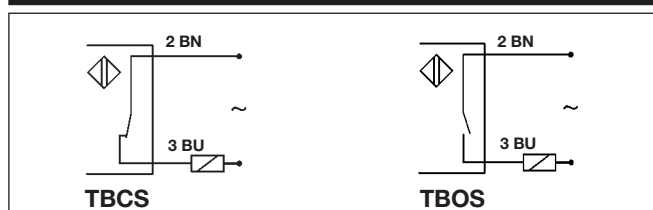

Power Supplies

Power supplies VAC: > SS 110

Installation Hints

Refer to "Installation Hints", Technical information.