



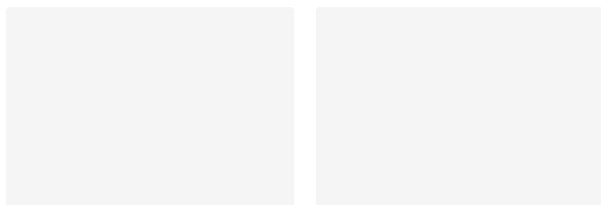

FH - resin colour printer ribbon

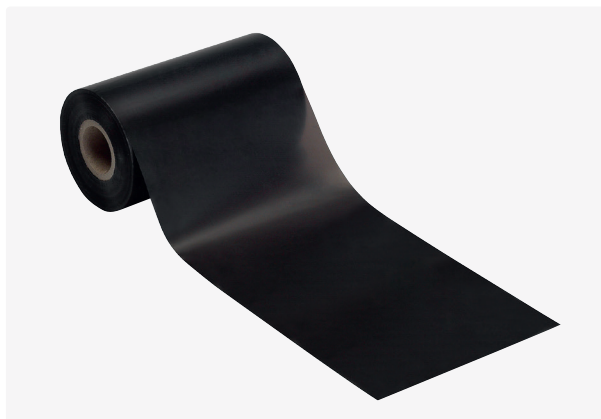

Product information

The FH resin-based ribbons are ideal for printing on glossy synthetic films. Printing takes place at high temperatures for optimum durability.

FH series

The most common field of application for FH resin-based ribbons is that of synthetic labels with a need for high durability.

FH+ series

While the FH series already offers good smudge-proof qualities at optimum printing temperature, the FH+ series is smudge- and scratch-proof, and is also resistant to many cleaning agents and oils.

FH++ series

Optimum durability is offered by the FH++ series, which is resistant to exposure of most industrial cleaners and oil vapours.

PU pcs.: 300

Information, conformities and approvals



Article	Order No.	Color	Roll width mm	Roll length m
FH colour ribbons for thermal transfer printers				
FH 40x300 ¹⁾	86662200	Black	40	300
FH 50x300 ¹⁾	86662202	Black	50	300
FH 60x300 ¹⁾	86662205	Black	60	300
FH 70x300 ¹⁾	86662208	Black	70	300
FH 80x300 ¹⁾	86662210	Black	80	300
FH 90x300 ¹⁾	86662212	Black	90	300
FH 110x300 ¹⁾	86662214	Black	110	300
FH+ colour ribbons for thermal transfer printers				
FH+ 40x300 ¹⁾	86662201	Black	40	300
FH+ 50x300 ¹⁾	86662203	Black	50	300
FH+ 55x300 ¹⁾	86662204	Black	55	300



FH - resin colour printer ribbon

Article	Order No.	Color	Roll width mm	Roll length m
FH+ 60x300 ¹⁾	86662206	Black	60	300
FH+ 70x300 ¹⁾	86662209	Black	70	300
FH+ 80x300 ¹⁾	86662211	Black	80	300
FH+ 90x300 ¹⁾	86662213	Black	90	300
FH+ 110x300 ¹⁾	86662215	Black	110	300
FH+ 110x300 ¹⁾	86662217	Signal red	110	300
FH+ 110x300 ¹⁾	86662218		110	300
FH+ 110x300 ¹⁾	86662219	Signal blue	110	300
FH+ 110x300 ¹⁾	86662220	Signal white	110	300
FH+ 110x300 ¹⁾	86662221	Signal gray	110	300
FH+ 110x300 ¹⁾	86662222	Signal orange	110	300
FH+ 110x300 ¹⁾	86662223	Signal yellow	110	300
FH+ 110x300 ¹⁾	86662224	Gold metallic	110	300
FH+ 110x300 ¹⁾	86662225	Silver metallic	110	300
FH++ colour ribbons for thermal transfer printers				
FH++ 60x300 ¹⁾	86662207	Black	60	300
FH++ 110x300 ¹⁾	86662216	Black	110	300

¹⁾ Information about packaging unit = roll length (m)

Labelling technology



Thermal transfer

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.