

# KEL-FG A

## Flange Enclosures



Click to shop online @ [www.trimantec.com](http://www.trimantec.com) or call 336-767-1379



Split grommets

1

## Product Description

The cable entry frames KEL-FG are suited for installation, sealing and strain relief of pre-terminated cables and conduits at an angle of 90° to the enclosure.

For routing cables and conduits up to 34 mm in diameter.

## Advantages

- Installation at an angle of 90° to the enclosure
- Mechanical protection of cable directly at the place of entry
- Protection against water spray and drips
- Warranty on pre-terminated cables remains
- Strain relief according to EN 50262 / 62444
- Vibration proof

## Specifications


Material	Polyamide (PA)
Flame class	UL94-Vo, self-extinguishing
Protection class	IP54, with gasket and correct selection of the cable grommets
Temperature	- 40°C to + 140°C (static)
Properties	Halogen free, silicone free
Cut-out dimensions	36 × 112 mm, Page 176 - 177

## Accessories

KT Cable grommets	38 - 42
KEL-SNAP Mounting frames	28 - 29
KEL-EMC Cable collectors	118 - 120

Description	Type	Order No.	Grommets small   large	PU
-------------	------	-----------	---------------------------	----

	KEL-FG A10	42320	10 -	1
	KEL-FG A10 with V2A screws	42320.200	10 -	1
	KEL-FG A7	42322	6 1	1
	KEL-FG A7 with V2A screws	42322.200	6 1	1
	KEL-FG A4	42324	2 2	1
	KEL-FG A4 with V2A screws	42324.200	2 2	1

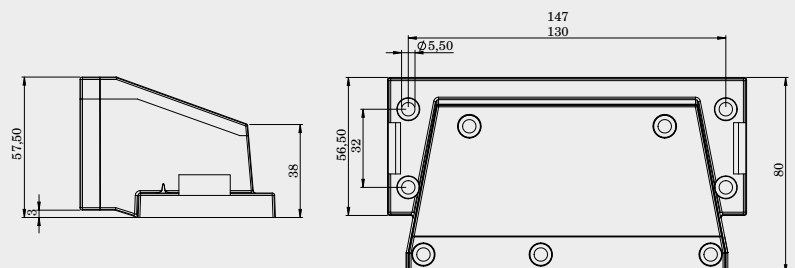

## KEL-FG B Flange Enclosures




V2A  
anti-corrosive

KEL-FG also available with V2A screws.



KEL-FG on request available with threaded bushings.

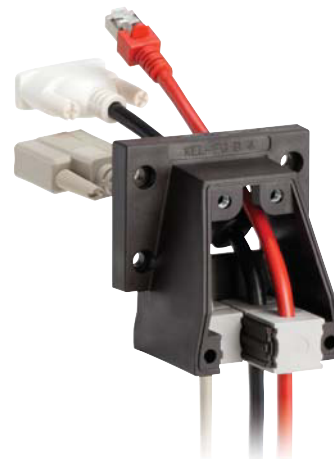

Type	Order No.	Grommets small   large	PU	Description
------	-----------	---------------------------	----	-------------

KEL-FG B4	42330	4 -	1	
KEL-FG B4 with V2A screws	42330.200	4 -	1	
KEL-FG B1	42332	- 1	1	
KEL-FG B1 with V2A screws	42332.200	- 1	1	

### Product Description

The cable entry frames KEL-FG are suited for installation, sealing and strain relief of pre-terminated cables and conduits at an angle of 90° to the enclosure.

For routing cables and conduits up to 34 mm in diameter.

### Advantages

- Installation at an angle of 90° to the enclosure
- Mechanical protection of cable directly at the place of entry
- Protection against water spray and drips
- Warranty on pre-terminated cables remains
- Strain relief according to EN 50262 / 62444
- Vibration proof

### Specifications

Material	Polyamide (PA)
Flame class	UL94-Vo, self-extinguishing
Protection class	IP54, with gasket and correct selection of the cable grommets
Temperature	- 40°C to + 140°C (static)
Properties	Halogen free, silicone free
Cut-out dimensions	46 × 36 mm, Page 176 - 177

### Accessories

KT Cable grommets	38 - 42
KEL-EMC Cable collectors	119 - 120

