



**Part no.: 50130611**  
**MD 7XXP-11-82IO4-12**  
**Distribution box**



Figure can vary

## Contents

- . Technical data
- . Dimensioned drawings
- . Circuit diagrams
- . Operation and display
- . Accessories



Part no.: 50130611 – MD 7XXP-11-82IO4-12 – Distribution box

## Technical data

### Electrical data

Switching signal	PNP
------------------	-----

### Performance data

Total current	12 A
---------------	------

### Connection

#### Master connection

Type of connection	Connector
Function	Connection to the control
Thread size	M12
No. of pins	12 -pin
Encoding	A-coded
Type	Male

#### Distribution box connections

Number of connections	8 Piece(s)
Thread size	M12
No. of pins	4 -pin
Encoding	A-coded
Type	Female
Material	Plastic
Material of O-ring seal	TPU
Material of contacts	Gold-plated
Operating current per contact	1.5 A

### Mechanical data

Design	Cubic
Dimension (W x H x L)	50 mm x 31 mm x 150 mm
Housing material	Plastic
Net weight	150 g

### Operation and display

Type of display	LED
-----------------	-----

### Environmental data

Ambient temperature, operation, flexible use	-20 ... 60 °C
Ambient temperature, operation, stationary use	-20 ... 60 °C

### Certifications


Degree of protection	IP 67, IP 65
Certifications	c UL US

### Classification


eCl@ss 8.0	27279219
eCl@ss 9.0	27440108
ETIM 5.0	EC002585

**Dimensioned drawings**


All dimensions in millimeters

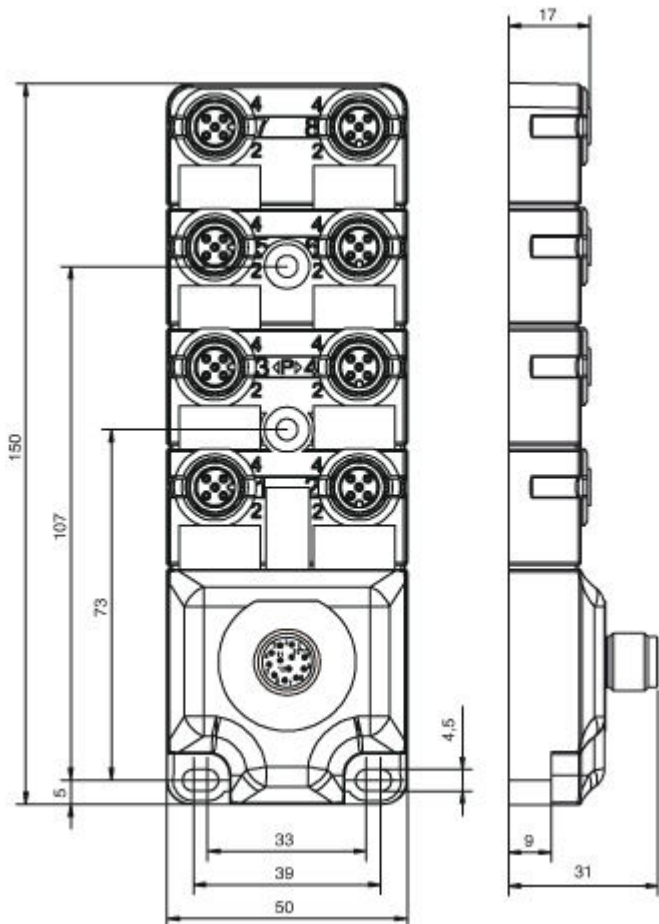


Pin	Pin assignment
1	Socket 1-4 / contact 1
2	Socket 1-4 / contact 3
3	Socket 1 / contact 4
4	Socket 2 / contact 4
5	Socket 5 / contact 4
6	Socket 3 / contact 4
7	Socket 7 / contact 4
8	Socket 4 / contact 4
9	Socket 6 / contact 4
10	Socket 8 / contact 4
11	n.c.
12	n.c.



Pin	Pin assignment
1	+
2	n.c.
3	-
4	Signal 1 (NO)
5	PE



## Circuit diagrams

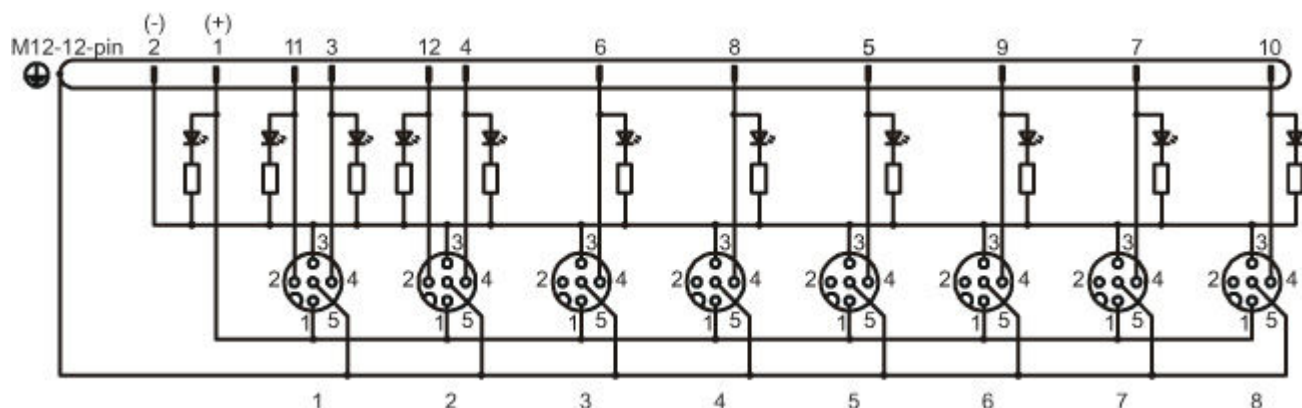




## Operation and display

### LEDs

LED	Display	Meaning
1	Green, continuous light	Operating voltage applied
2	Yellow, continuous light	Signal 1


## Accessories

### Connection technology - Connection cables


	Part no.	Designation	Article	Description
	50130281	KD S-M12-CA-P1-020	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 12 -pin Connection 2: Open end Shielded: Yes Cable length: 2,000 mm Sheathing material: PUR
	50130282	KD S-M12-CA-P1-050	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 12 -pin Connection 2: Open end Shielded: Yes Cable length: 5,000 mm Sheathing material: PUR
	50130283	KD S-M12-CA-P1-100	Connection cable	Connection 1: Connector, M12, Axial, Female, A-coded, 12 -pin Connection 2: Open end Shielded: Yes Cable length: 10,000 mm Sheathing material: PUR

Part no.: 50130611 – MD 7XXP-11-82IO4-12 – Distribution box

## Connection technology - Connectors

	Part no.	Designation	Article	Description
	50132254	D M12A-12P	Connector	Connection: Connector with solder connection, M12, Axial, Female, A-coded, 12 -pin

## General

	Part no.	Designation	Article	Description
	50134480	CAP M12K-Set	Connection cap	Type: Cap for free sockets Thread size: M12 Material: Plastic