

MTL 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 400VA IN: 230/400VAC +/- 15VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers

400 VA


Spring clamp terminals


Isolation class T 60/B



Click to shop online @ www.trimantec.com or call 336-767-1379

Illustration

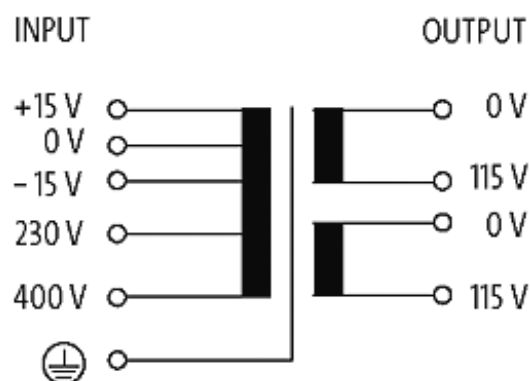

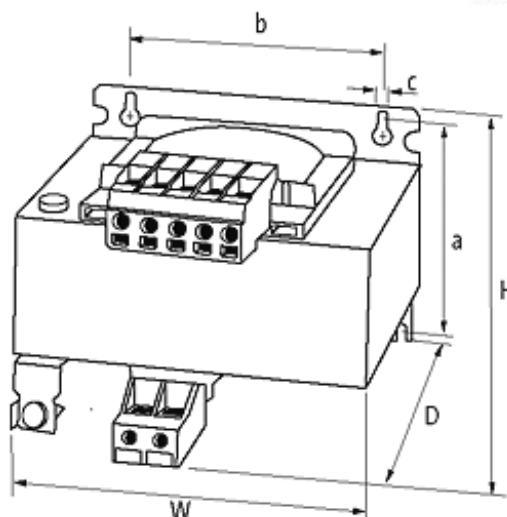

Product may differ from Image

Approvals



Input

Input voltage	230/400 $\pm$ 15 V AC
Frequency	50...60 Hz
Input current	2 A (230 V AC); 1.17 A (400 V AC)
Inrush current	32 A (230 V AC); 18.48 A (400 V AC)
Short-circuit current	59 A (230 V AC); 34.1 A (400 V AC)

General data

Test isolation voltage	4 kV (prim./sec.)
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Drill hole $\varnothing$	7x11 mm
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Fixing centers a x b x c	95x122x7 mm
Dimensions H x W x D	113x151x146 mm
Temperature range	-20...+60 °C (storage temperature -40...+80 °C)

Output

Output voltage	1 x 230, 1 x 115, 2 x 115 V AC
Output rating	400 VA

Commercial data

country of origin	CZ
customs tariff number	85043180
EAN	4048879065870
eClass	27031302

minimum order quantity

1