

**MSVD POWER SOCKET NEMA (GFCI)**

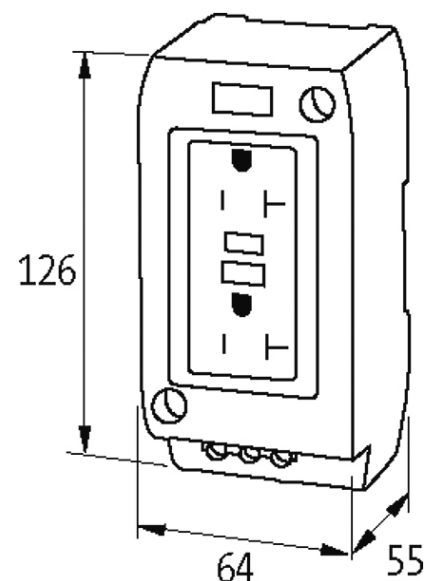
Mounting rail

USA (2 × NEMA-GFCI 5-15)  
(Ground Fault Circuit Interrupter)  
Screw terminals

Each socket can be loaded with 15 A, however, the total load of both sockets must be below 30 A.



Click to shop online @ [www.trimantec.com](http://www.trimantec.com) or call 336-767-1379

**Illustration**

Product may differ from Image

### Approvals



### Technical Data

Operating voltage	125 V AC
Operating current	max. 15 A
Trip level	4...6 mA

### General data

Mounting method	DIN-rail mountable (EN 60715)
Connection	Screw terminals: max. 6 mm <sup>2</sup>
Dimensions H x W x D	126x64x55 mm

### Commercial data

country of origin	CZ
customs tariff number	85366990
EAN	4048879041393
eClass	27144042
minimum order quantity	1