

MVP12, 4XM12, UNIVERSAL, SET

Pins wired 1:1 to terminal

4-way UNIVERSAL

Screw plug-in terminals


all 5 contacts of the M12 females separately carried on terminals


Replaces identical product (Art.No. 276625)

Further cable lengths on request. Separation contact 5 possible by removable plug links
Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.




Click to shop online @ www.trimantec.com or call 336-767-1379

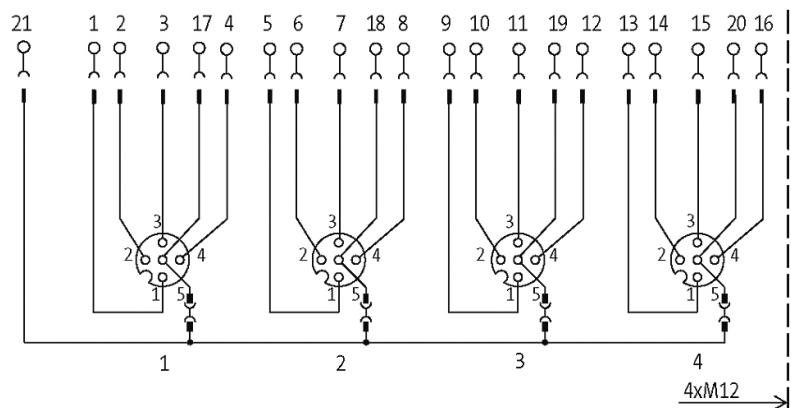Illustration

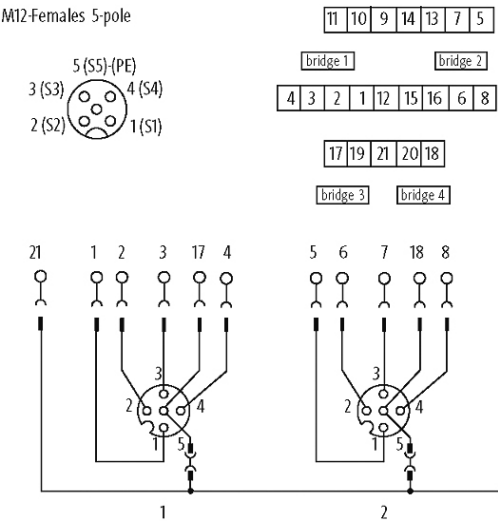

free arrangeable, contact 1:1 on terminals
for 5 signals per port, possibility to bridge each PIN5

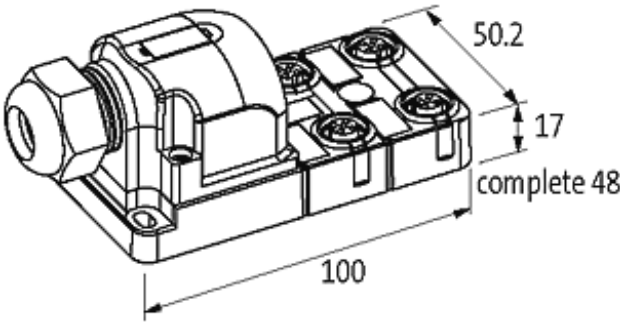

Product may differ from Image

Approvals



Contact layout

PIN 1	(S1)
PIN 2	(S2)
PIN 3	(S3)
PIN 4	(S4)
PIN 5	(S5)/(Earth)

Technical Data

Operating voltage	max. 42 V AC/DC
Operating current per contact	max. 4 A
Total current	max. 8 A
Connection	Screw plug-in terminals: max. 1.5 mm ² (AWG 16)
Protection	IP65/IP67
Housing	Plastic, flame retardant

General data

Temperature range	-20...+80 °C
-------------------	--------------

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879353434
eClass	27069190
minimum order quantity	1