

## EXACT8, 4XM8, 3 POLE BASIC HOUSING

Without homerun-cable



4-way, 3-pole  
inline face or side mounting

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.





Click to shop online @ [www.trimantec.com](http://www.trimantec.com) or call 336-767-1379

### Illustration

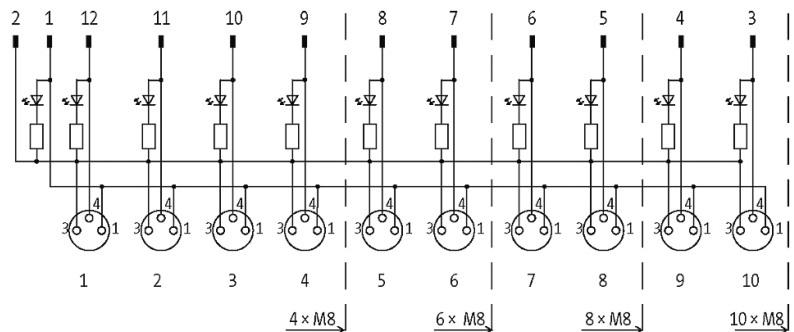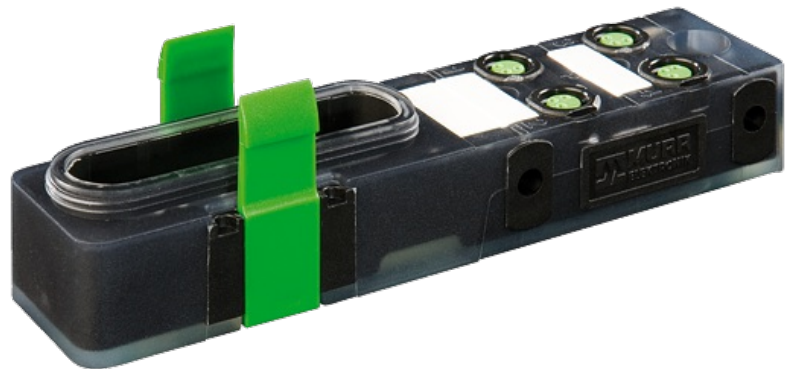

M8-Females 3-pole

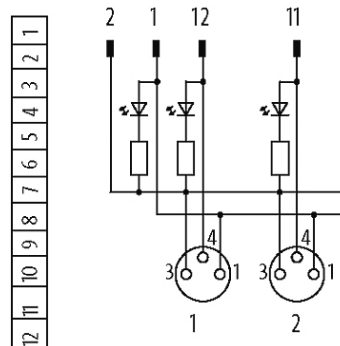

for 1 signal per port

Product may differ from Image

### Approvals



### Contact layout

PIN 1	(+)
PIN 3	(-)
PIN 4	(NO)/(S1)
LED display	LED (green): Power / LED (yellow): (S1)

### Technical Data

Operating voltage	24 V DC
Operating current per contact	max. 2 A
Total current	max. 8 A
Protection	IP65/IP67

### General data

Temperature range	-20...+70 °C, depending on cable quality
-------------------	--

### Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879056618
eClass	27069190
minimum order quantity	1