

## PRE-WIRED CAP FOR EXACT8, 4XM8, 3 POLE

3.0m PUR 4X0.34+2x0,75, UL/CSA

for 4-way distribution box, 3-pole  
3.0 m

Further cable lengths on request. Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.




Click to shop online @ [www.trimantec.com](http://www.trimantec.com) or call 336-767-1379


### Illustration



M8-Females 3-pole

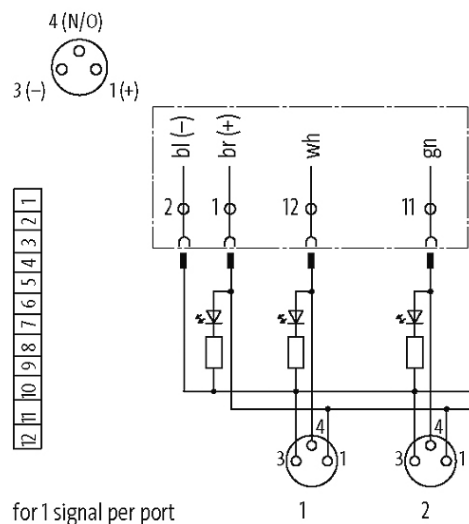

for 1 signal per port

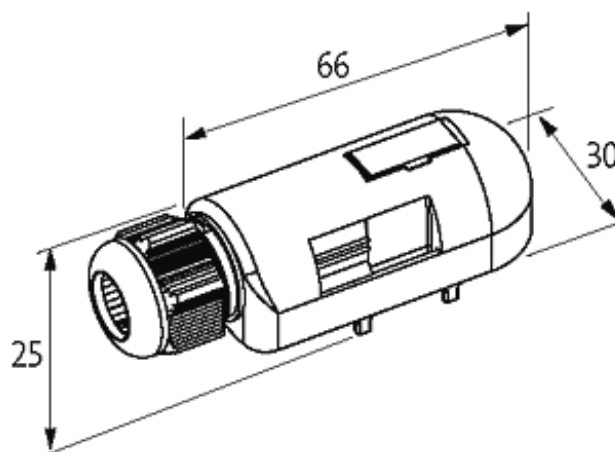

Product may differ from Image

### Approvals



### Cables

Cable number	334
No./diameter of wires	4×0.34 + 2×0.75 mm <sup>2</sup>
C-track properties	5 Mio.
Jacket Color	gray
Material (jacket)	PUR (UL/CSA)
Outer Ø	approx. 7.6 mm
Bend radius (fixed)	5 × outer Ø
Bend radius (moving)	10 × outer Ø
Temperature range (fixed)	-40...+80 °C
Temperature range (mobile)	-5...+60 °C

### Technical Data

Total current	max. 8 A
Housing	Plastic, flame retardant

### General data

Temperature range	-20...+80 °C, depending on cable quality
-------------------	--

### Commercial data

country of origin	CZ
customs tariff number	85444290
EAN	4048879056397
eClass	27143423
minimum order quantity	1