

MTPS POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 230/400+/-15VAC OUT: :24V/2ADC

Current : 2 A


Output rating: 48 W


This power supply units meet the (EN 61000-3-2) standard for harmonic current.



Click to shop online @ www.trimantec.com or call 336-767-1379


Illustration

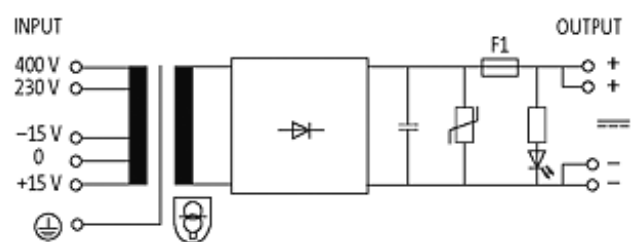

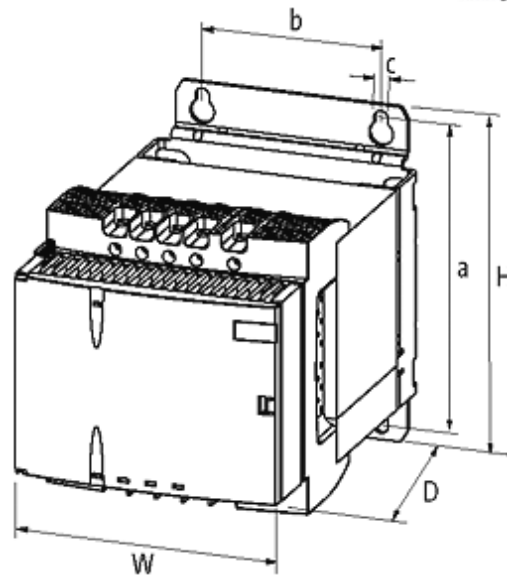

Product may differ from Image

Approvals

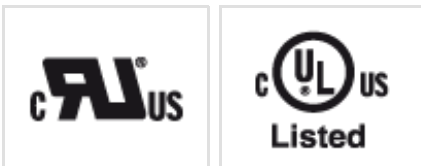

Input

Input voltage	230/400 ±15 V AC
Input fuse (external)	0.5 A (T) (230 V AC); 0.3 A (T) (400 V AC)
Frequency	50...60 Hz
LED display	LED (green) for input voltage
Input current	0.37 A (230 V AC); 0.21 A (400 V AC)

General data

Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Temperature range	-20...+60 °C, no condensation
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Dimensions H × W × D	108×87×142 mm
Fixing centers a × b × c	96×60×5.5 mm

Output

Output voltage	24 V DC (SELV)
Ripple	max. 5 %rms
Output current	max. 2 A
Output fuse	2 A (T)
Output filter	LED, VDR and smoothing capacitor

Commercial data

country of origin	CZ
customs tariff number	85044090

EAN	4048879079853
eClass	27049002
minimum order quantity	1