

MTL 1-PHASE CONTROL AND ISOLATION TRANSFORMER


P: 250VA IN: 230/400VAC +/- 15VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers
250 VA
Isolation class T 60/B



Click to shop online @ www.trimantec.com or call 336-767-1379

Illustration

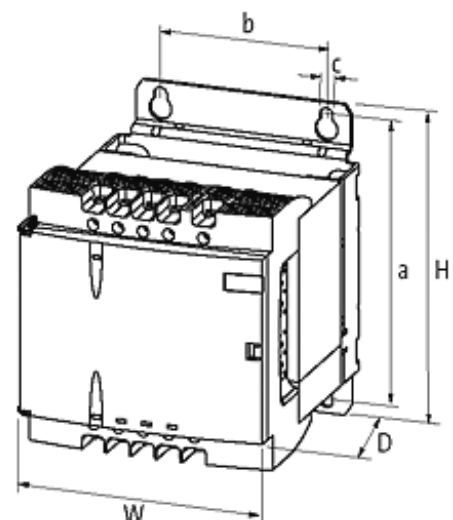

Product may differ from Image

Approvals



Input

Input voltage	230/400 ±15 V AC
Frequency	50...60 Hz
Input current	1.26 A (230 V AC); 0.73 A (400 V AC)
Inrush current	13.7 A (230 V AC); 7.92 A (400 V AC)
Short-circuit current	27.5 A (230 V AC); 15.9 A (400 V AC)

Technical Data

LED display	LED (green) for input voltage
-------------	-------------------------------

General data

Test isolation voltage	4 kV (prim./sec.)
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Drill hole Ø	6.5×11 mm
Mounting method	DIN-rail mountable TH35-15 (EN 60715) or for key-hole mounting
Fixing centers a × b × c	136×82×6.5 mm
Dimensions H × W × D	153×123×142 mm
Temperature range	-20...+60 °C, no condensation

Output

Output voltage	1 × 230, 1 × 115, 2 × 115 V AC
Output rating	250 VA

Commercial data

country of origin	CZ
customs tariff number	85043180
EAN	4048879078184
eClass	27031302
minimum order quantity	1