

## MICO BASIC 4.2 ELEC AUX CIRCUIT, 4 CHANNELS

IN: 24VDC OUT: 24V/2ADC

MICO BASIC 4.2

4 channels


Current adjustment 2 A


Fire protection (EN 60950-1) Operating voltage protection (EN 61131-2)



Click to shop online @ [www.trimantec.com](http://www.trimantec.com) or call 336-767-1379

### Illustration

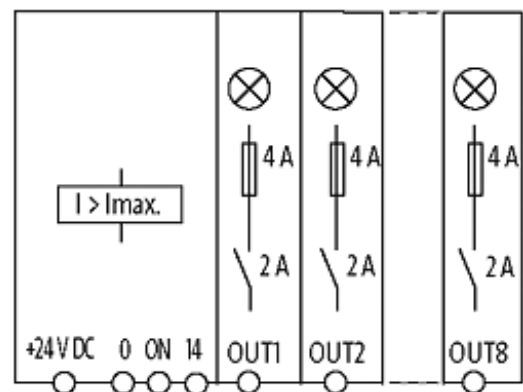

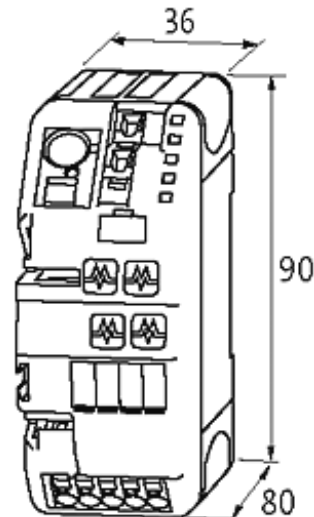

Product may differ from Image

### Approvals



**Class 2**  
UL1310/NEC 725



### Input

Operating voltage 24 V DC (18...30 V DC)

### Control inputs

Input voltage (ON) 10...30 V DC

Impulse length (ON) min. 20 ms

### Control outputs

Group alarm output max. 20 mA; high: all channels ON; low: not all channels ON

### General data

Connection	Spring clamp terminals
Input terminals	1 × 16 mm <sup>2</sup>
Output terminals	per output 1 × 4 mm <sup>2</sup>
Alarm terminals	2.5 mm <sup>2</sup>
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Mounting method	DIN-rail mountable TH35 (EN 60715)
Dimensions H × W × D	90×36×80 mm
Temperature range	0...+55 °C (storage temperature -40...+80 °C)

### Output

Current adjustment	2 A
Inrush capacity	max. 20 mF (per channel)

### Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85363010
EAN	4048879327145
eClass	27141901
minimum order quantity	1