

MICO BASIC 5.2/3.6 ELEC AUX CIRCUIT , 8 CHANNELS

IN: 24VDC OUT : 5x24V/2ADC 3x24V/6ADC

MICO BASIC 5.2/3.6

8 channels


Current adjustment 5 × 2 A; 3 × 6 A

Fire protection (EN 60950-1) Operating voltage protection (EN 61131-2)




Click to shop online @ www.trimantec.com or call 336-767-1379

Illustration

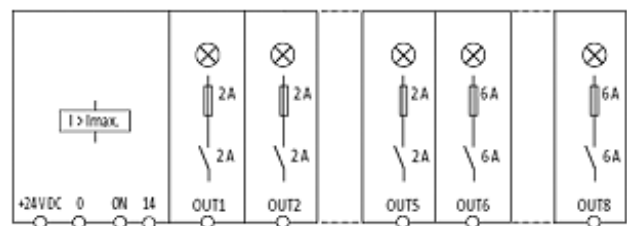

stay connected

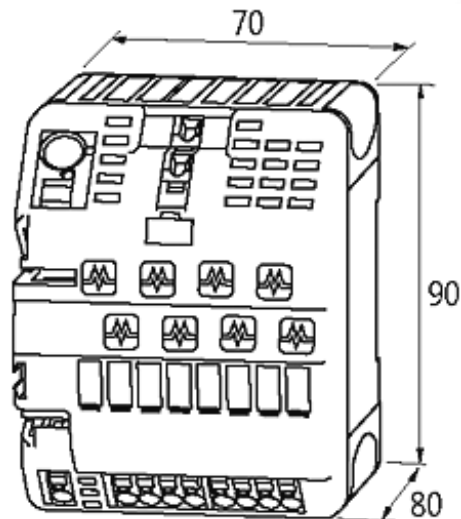

Product may differ from Image

Approvals



Input

Operating voltage 24 V DC (18...30 V DC)

Control inputs

Input voltage (ON) 10...30 V DC

Impulse length (ON) min. 20 ms

Control outputs

Group alarm output max. 20 mA; high: all channels ON; low: not all channels ON

General data

Connection Spring clamp terminals

Input terminals 1 × 16 mm²

Output terminals per output 1 × 4 mm²

Alarm terminals 2.5 mm²

Bridging concept one side, with spring clamp terminals or bridge set (max. 40 A)

Mounting method DIN-rail mountable TH35 (EN 60715)

Dimensions H × W × D 90×70×80 mm

Temperature range 0...+55 °C (storage temperature -40...+80 °C)

Output

Current adjustment 5 × 2 A; 3 × 6 A

Inrush capacity max. 20 mF (per channel)

Commercial data

country of origin CZ

customs tariff number	85363030
EAN	4048879382373
eClass	27141901
minimum order quantity	1