

## MICO BASIC 8.6 ELEC AUX CIRCUIT, 8 CHANNELS

IN: 24VDC OUT: 24V/6ADC

MICO BASIC 8.6


8 channels

Current adjustment 6 A




Click to shop online @ [www.trimantec.com](http://www.trimantec.com) or call 336-767-1379

### Illustration

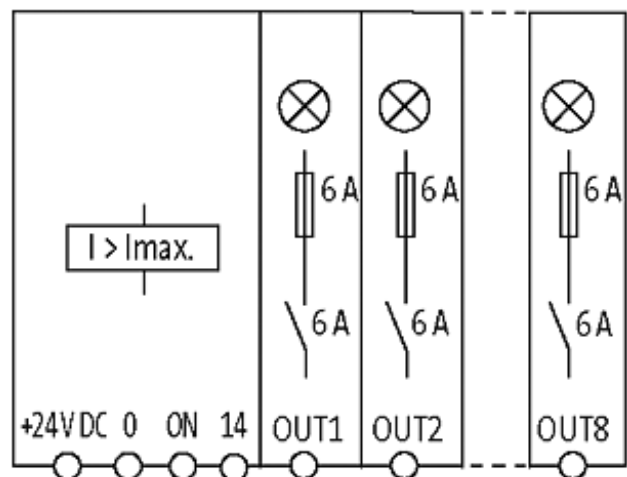

stay connected

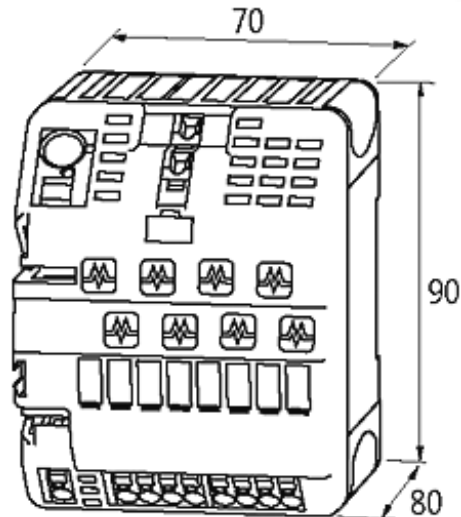

Product may differ from Image

### Approvals



### Input

Operating voltage 24 V DC (18...30 V DC)

### Control inputs

Input voltage (ON) 10...30 V DC

Impulse length (ON) min. 20 ms

### Control outputs

Group alarm output max. 20 mA; high: all channels ON; low: not all channels ON

### General data

Input terminals 1 × 16 mm<sup>2</sup>

Output terminals per output 1 × 4 mm<sup>2</sup>

Alarm terminals 2.5 mm<sup>2</sup>

Bridging concept one side, with spring clamp terminals or bridge set (max. 40 A)

Connection Spring clamp terminals

Mounting method DIN-rail mountable TH35 (EN 60715)

Dimensions H × W × D 90×70×80 mm

Temperature range 0...+55 °C (storage temperature -40...+80 °C)

### Output

Current adjustment 6 A

Inrush capacity max. 20 mF (per channel)

### Commercial data

country of origin CZ

customs tariff number	85363010
EAN	4048879332453
eClass	27141901
minimum order quantity	1