

MICO FUSE 250 FUSE HOLDER 5X20MM 8 CHANNELS

IN: 250V AC/DC OUT : 250V AC/DC / 6A AC/DC

MICO FUSE 250


8 channels

Total current : max. 40 A




Click to shop online @ www.trimantec.com or call 336-767-1379

Illustration

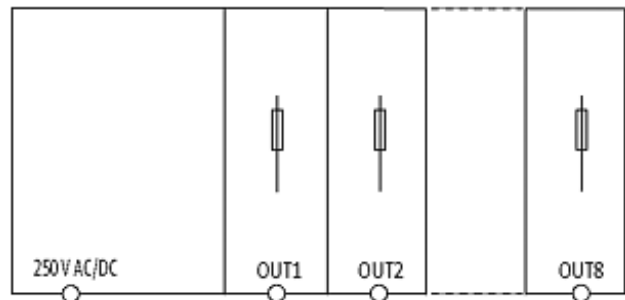

stay connected

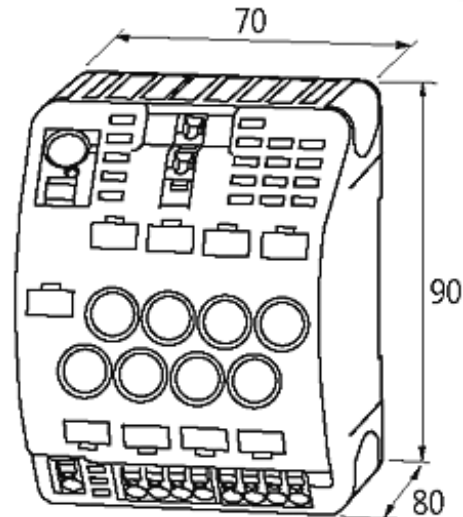

Product may differ from Image

Approvals



Technical Data

Operating voltage	max. 250 V AC/DC
Operating current	max. 6 A (40 °C)
Total current	max. 40 A

General data

Connection	Spring clamp terminals
Input terminals	1 × 16 mm ²
Output terminals	1 × 0.5...4 mm ²
Mounting method	DIN-rail mountable TH35 (EN 60715)
Dimensions H × W × D	90×70×80 mm
Temperature range	-25...+55 °C

Commercial data

country of origin	CZ
customs tariff number	85363030
EAN	4048879335270
eClass	27371802
minimum order quantity	1