

# KEL-DPZ-KL

## Cable Entry Plates



Click to shop online @ [www.trimantec.com](http://www.trimantec.com) or call 336-767-1379



IP65



KEL-DPZ also available in black.



Membrane on front



Conical shape on back provides additional sealing and strain relief

Description	Type	Order No.	Number of cables	PU
-------------	------	-----------	------------------	----

## Product Description

The cable entry plate KEL-DPZ-KL is designed for routing up to 72 standard cables (without connectors). The assembly of the KEL-DPZ-KL with cables or pneumatic hoses can be done within seconds. Simply put a small slit in the thin membrane, push standard cables through and it's immediately sealed (IP65/NEMA 12) and strain relieved. ST-B Plugs can be used for sealing pierced membranes if cables have been removed.

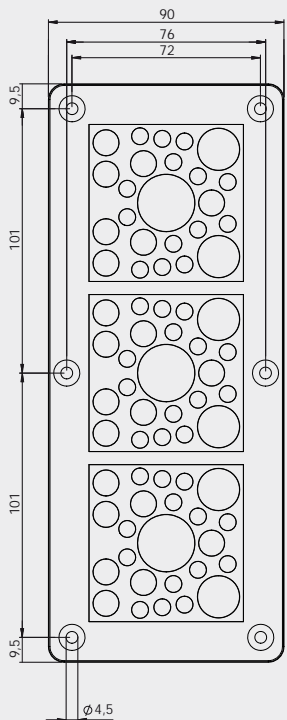
The KEL-DPZ-KL matches on junction boxes KL from Rittal.

## Advantages

- Space saving shape
- Dual sealing of cables according to IP65/NEMA 12
- High packing density
- Assembly within seconds
- Hygienic design - free of dirt-collecting recesses

## Specifications

Material	Support: Stainless steel V2A, molded with elastomer Sealing plate: Elastomer Screws: Stainless steel V2A
Color	<input type="checkbox"/> gray (similar RAL 7035) <input checked="" type="checkbox"/> black
Flame class	UL94-Vo, self-extinguishing
Protection class	IP65 (certified according to DIN EN 60529:2000-09)
Temperature Properties	- 40°C to + 90°C (static)
Cut-out dimensions	192 × 62 mm
Height	4 mm

	KEL-DPZ-KL72	<input type="checkbox"/> 43675.001 <input checked="" type="checkbox"/> 43675.101	42x 3.2 - 6.5 mm 21x 5 - 10.2 mm 6x 9 - 16.2 mm 3x 16 - 22 mm	1
		* Only valid for gray product types		

## Accessories

ST-B Plugs 74