




Type SSG (conduit clamp)



Product information

The hose clamp type SSG is made of sheet steel. The surface is galvanized and partially coated with a halogen-free elastomer. The SSG are used for easy fixing or securing of cable protection conduits and distinguish themselves with the following advantages:

- Quick and easy assembly
- The elastomer cover prevents damage to the protective conduits
- Suitable for all cable protection conduits

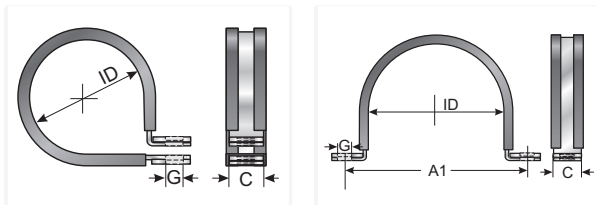

Information, conformities and approvals



Article	Order No.	C mm	G mm	ID mm	A1 mm	A2 mm	PU pcs.
SSG 06/M5	83723210	15	5.3	10	13	5	25
SSG 06/M6 ¹⁾	83723211	18.5	6.4	10	16.2	6	25
SSG 07/M5	83723212	15	5.3	12	14	5	25
SSG 07/M6	83723213	18.5	6.4	12	17.2	6	25
SSG 09/M5	83723214	15	5.3	13	14.5	5	25
SSG 09/M6	83723215	18.5	6.4	13	17.7	6	25
SSG 11/M5	83723216	15	5.3	15	15.5	5	25
SSG 11/M6	83723217	18.5	6.4	15	18.7	6	25
SSG 13/M8	83723223	18.5	8.4	19		6	50
SSG 16/M5	83723218	15	5.3	21	18.5	5	25
SSG 16/M6	83723219	18.5	6.4	21	21.7	6	25



Type SSG (conduit clamp)

Article	Order No.	C mm	G mm	ID mm	A1 mm	A2 mm	PU pcs.
SSG 16/M8	83723221	18.5	8.4	21	21.7	6	50
SSG 21/M6	83723222	18.5	6.4	28	25.2	6	25
SSG 21/M8	83723225	18.5	8.4	28	25.2	6	25
SSG 29/M6	83723224	18.5	6.4	34	28.2	6	25
SSG 36/M8	83723226	25	8.4	40	34.5	8.5	10
SSG 48/M6	83723228	18.5	6.4	54	38.2	6	10
SSG 70/M8	83723230	24.5	8.4	78	107	8.5	10
SSG 95/M8	83723232	24.5	8.4	105	134	8.5	10

¹⁾ No stock goods, delivery time and minimum order quantities upon request

Material properties



Galvanised sheet steel-
IEPDM

Thermal properties



Temperature / temperature
range -40 °C – 120 °C

Conformity



RoHS (EC Directive
2011/65/EU)

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.