

SHOWER

ZT7767

Colonna doccia completa di termostatico esterno. / Shower column with exposed thermostatic mixer.



Colonna doccia completa di termostatico esterno, soffione Ø 200 mm in ottone Z94265 e doccetta in ABS Z94727 a getto fisso.

Water Saving - portata d'acqua uguale o inferiore a 9 l/min.

Shower column with exposed thermostatic mixer, Z94265 brass shower head Ø 200mm and Z94727 ABS handshower simple jet.

Water Saving - water flow rate of 9 l/min or less.


SHOWER

ZT7767

Finiture / Finishes



Cromo / Chrome



C3

Nickel Spazzolato / Brushed Nickel




C8

Nickel Lucido / Polished Nickel




C40

Oro / Gold




C41

Oro spazzolato / Brushed Gold



C50

Metal Black / Metal Black



C51

Metal Black spazzolato / Brushed Metal Black




W1

Bianco Opaco Goffrato / Embossed Matt White



N1

Nero Opaco Goffrato / Embossed Matt Black



N6

Nero opaco / Matt black



J3

Glossy gesso / Glossy gesso



K7

Pearl cipria / Pearl cipria



R6

Pearl chili / Pearl chili



V7

Pearl salvia / Pearl salvia



V8


Matt mirto / Matt mirto

Note / Notes

SHOWER

ZT7767


Disegno Complessivo / Overall Drawing

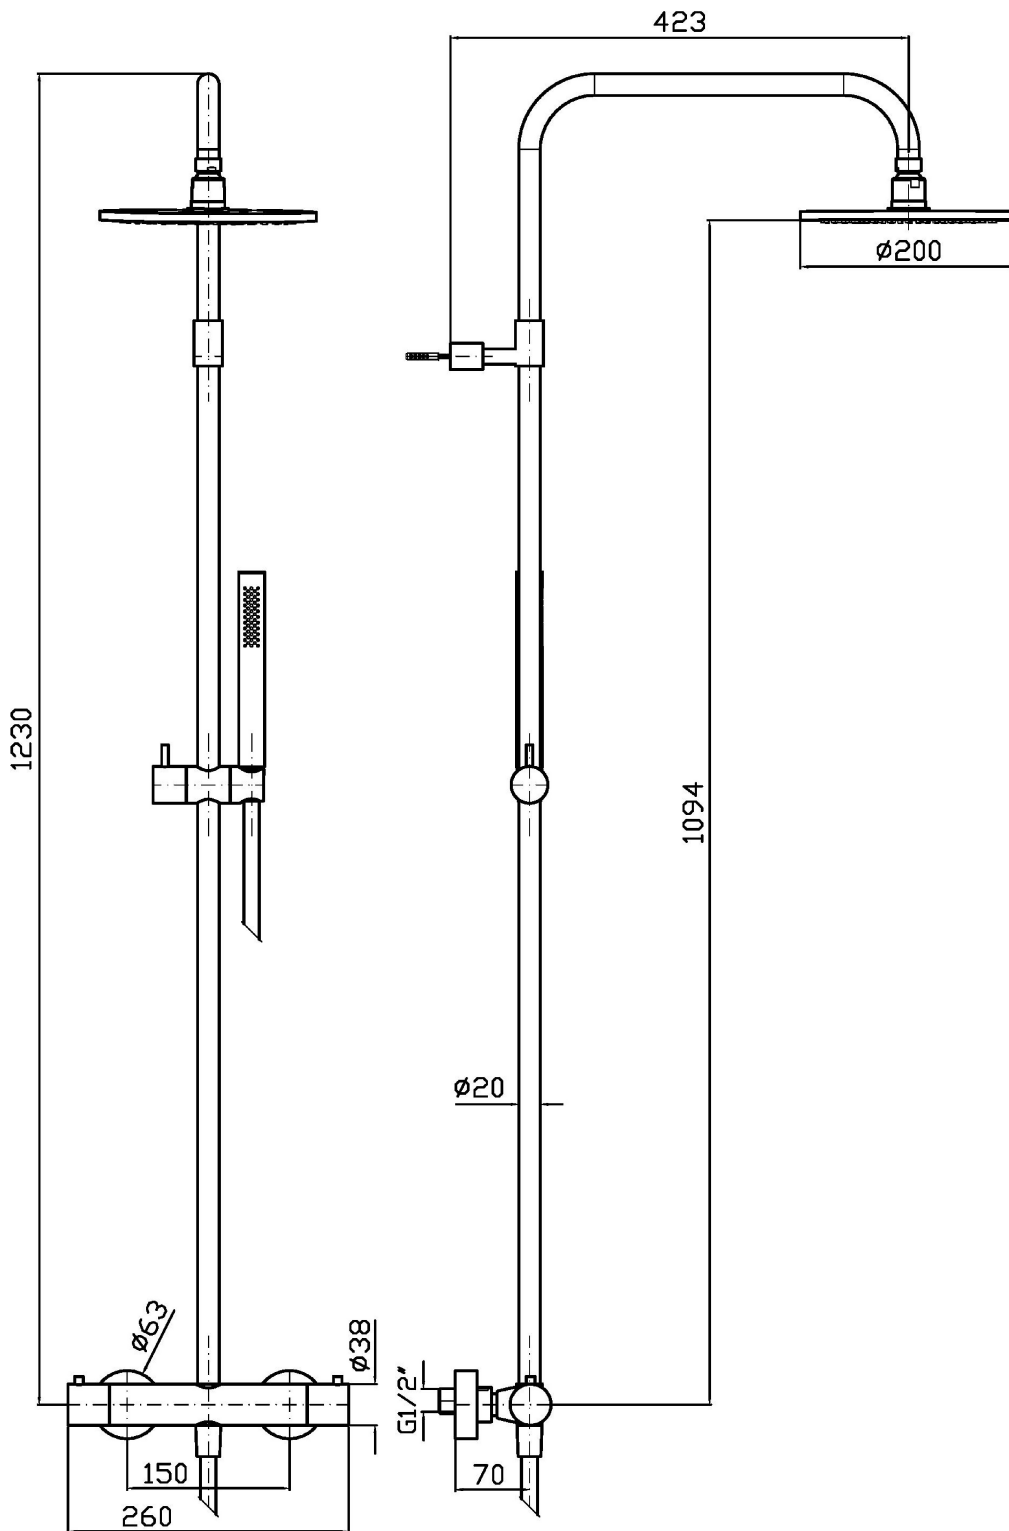

SHOWER

ZT7767

Esplosi / Exploded

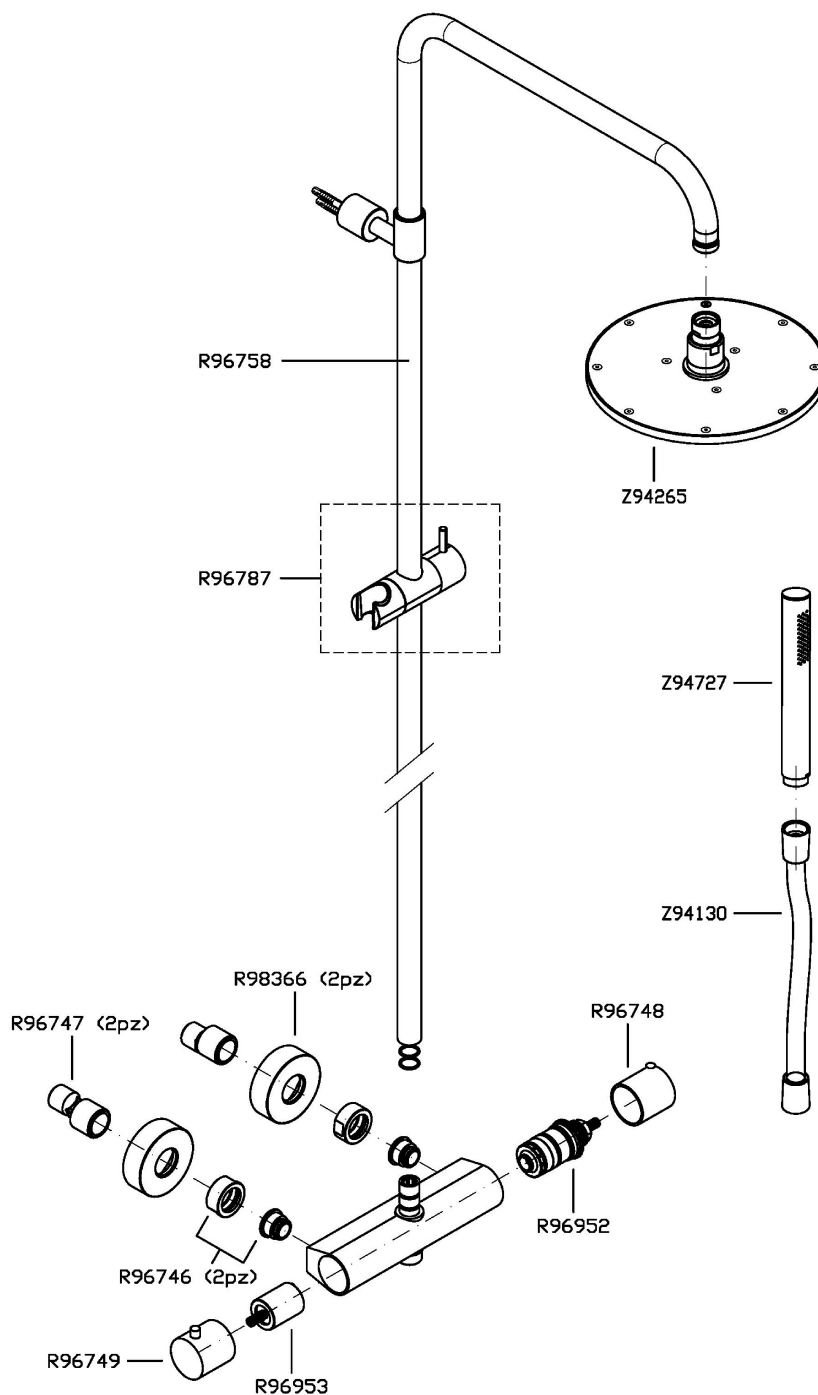

SHOWER

ZT7767 Certificazioni / Certifications


BELGIO

BELGAQUA

SHOWER

ZT7767 Portate / Flowrates (lt/min)

PRESSIONE PRESSURE	1 BAR	2 BAR	3 BAR	4 BAR	5 BAR
SOFFIONE SHOWER HEAD <i>P1</i>	9	9	9	9	9
DOCCETTA HANDSHOWER <i>P2</i>	6,1	8,5	8,6	9	9
<i>P3</i>					
<i>P4</i>					
<i>P5</i>					

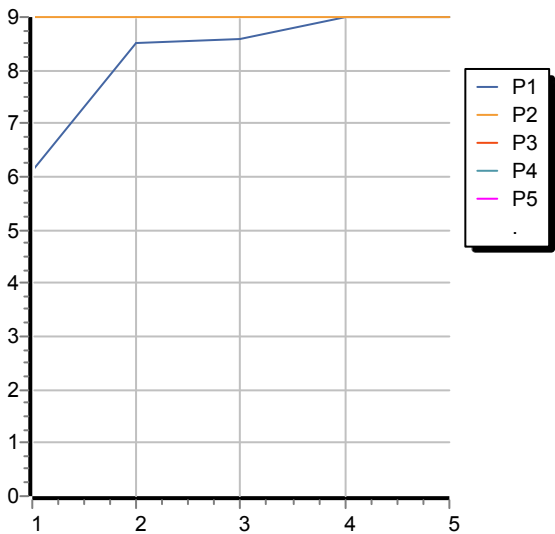

SHOWER

ZT7767 Pesì e Misure / Weights and Sizes

Peso (Kg) Weight (lb)	6,09 (Kg)	13,43 (lb)
Volume test (dc3) - (in3)	87,00 (dc3)	5309,06 (in3)
h (mm) - (in)	110,00 (mm)	4,33 (in)
L1 (mm) - (in)	430,00 (mm)	16,93 (in)
L2 (mm) - (in)	1180,00 (mm)	46,46 (in)

