The United States of America



Has received an application for a patent for a new and useful invention. The title and description of the invention are enclosed. The requirements of law have been complied with, and it has been determined that a patent on the invention shall be granted under the law.

Therefore, this

United States Patent

Grants to the person(s) having title to this patent the right to exclude others from making, using, offering for sale, or selling the invention throughout the United States of America or importing the invention into the United States of America, and if the invention is a process, of the right to exclude others from using, offering for sale or selling throughout the United States of America, or importing into the United States of America, products made by that process, for the term set forth in 35 U.S.C. 154(a)(2) or (c)(1), subject to the payment of maintenance fees as provided by 35 U.S.C. 41(b). See the Maintenance Fee Notice on the inside of the cover.

Michelle K. Lee

Director of the United States Patent and Trademark Office



US008998029B1

(12) United States Patent

(10) Patent No.:

US 8,998,029 B1

(45) Date of Patent:

Apr. 7, 2015

(54) BABY BOTTLE HOLDING DEVICES, SYSTEMS AND METHODS

(71) Applicant:

CA (US)

(72) Inventor:

CA (US)

(*) Notice:

Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: 14/465,093

(22) Filed: Aug. 21, 2014

(51) Int. Cl. A47G 23/0

(2006.01)

A47G 23/00 A61J 9/06

(2006.01)

(52) U.S. Cl.

CPC A61J 9/06 (2013.01); A61J 2009/0623 (2013.01); A61J 2009/0607 (2013.01)

(58) Field of Classification Search

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

3,058,708	A	*	10/1962	Murray et al	248/102
				Pfaffenberger	
3,773,287	A	*	11/1973	Hechinger	248/102
4.014,505	A	*	3/1977	Dowd	248/105
4,497,417				Tabet	
	3-				

4.723.801	A	*	2/1988	Musumeci et al 294/33
		*	7/1990	Lee 215/11.1
		*	7/1990	Ennis 248/102
		*	10/1991	Robbins, III 220/495.06
		*	6/1998	
		*	6/1998	
	1.134.4	*	10/1998	Kochan 294/33
		*	3/2000	Dunnum 340/586
			11/2001	Osborn 220/737
			6/2011	Carnevali 248/160
				Mumaw et al 220/694
				Berglund 215/396
	4,941,579 4,943,017 5,060,816 5,765,715 5,772,069 5,816,631 6,037,872 6,315,153 7,954,773 8,123,069	6,315,153 B1 7,954,773 B2 8,123,069 B1	4,941,579 A * 4,943,017 A * 5,060,816 A * 5,765,715 A * 5,772,069 A * 5,816,631 A * 6,037,872 A * 6,315,153 B1 * 7,954,773 B2 * 8,123,069 B1 *	4,941,579 A * 7/1990 4,943,017 A * 7/1990 5,060,816 A * 10/1991 5,765,715 A * 6/1998 5,772,069 A * 6/1998 5,816,631 A * 10/1998 6,037,872 A * 3/2000 6,315,153 B1 * 11/2001 7,954,773 B2 * 6/2011 8,123,069 B1 * 2/2012

^{*} cited by examiner

Primary Examiner — Steven A. Reynolds


Assistant Examiner — King M Chu

(74) Attorney, Agent, or Firm — Knobbe Martens Olson & Bear, LLP

(57) ABSTRACT

A support system for a baby bottle has a support body having a generally cylindrical portion. A channel is defined within the support body. A slot is defined between slot edges of the support body extending between a first end portion and a second end portion. First and second handle portions are coupled to the support body. The first and second handle portions are coupled to the support body at an angle less than about 120 degrees apart from each other about a surface of the support body. The support body is sized and configured to support a baby bottle positioned within the channel defined within the support body. In some embodiments, the first and second handle portions have handle grip portions that are coupled to the support body at an angle between about 5 degrees and about 30 degrees relative to a surface of the support body.

21 Claims, 8 Drawing Sheets

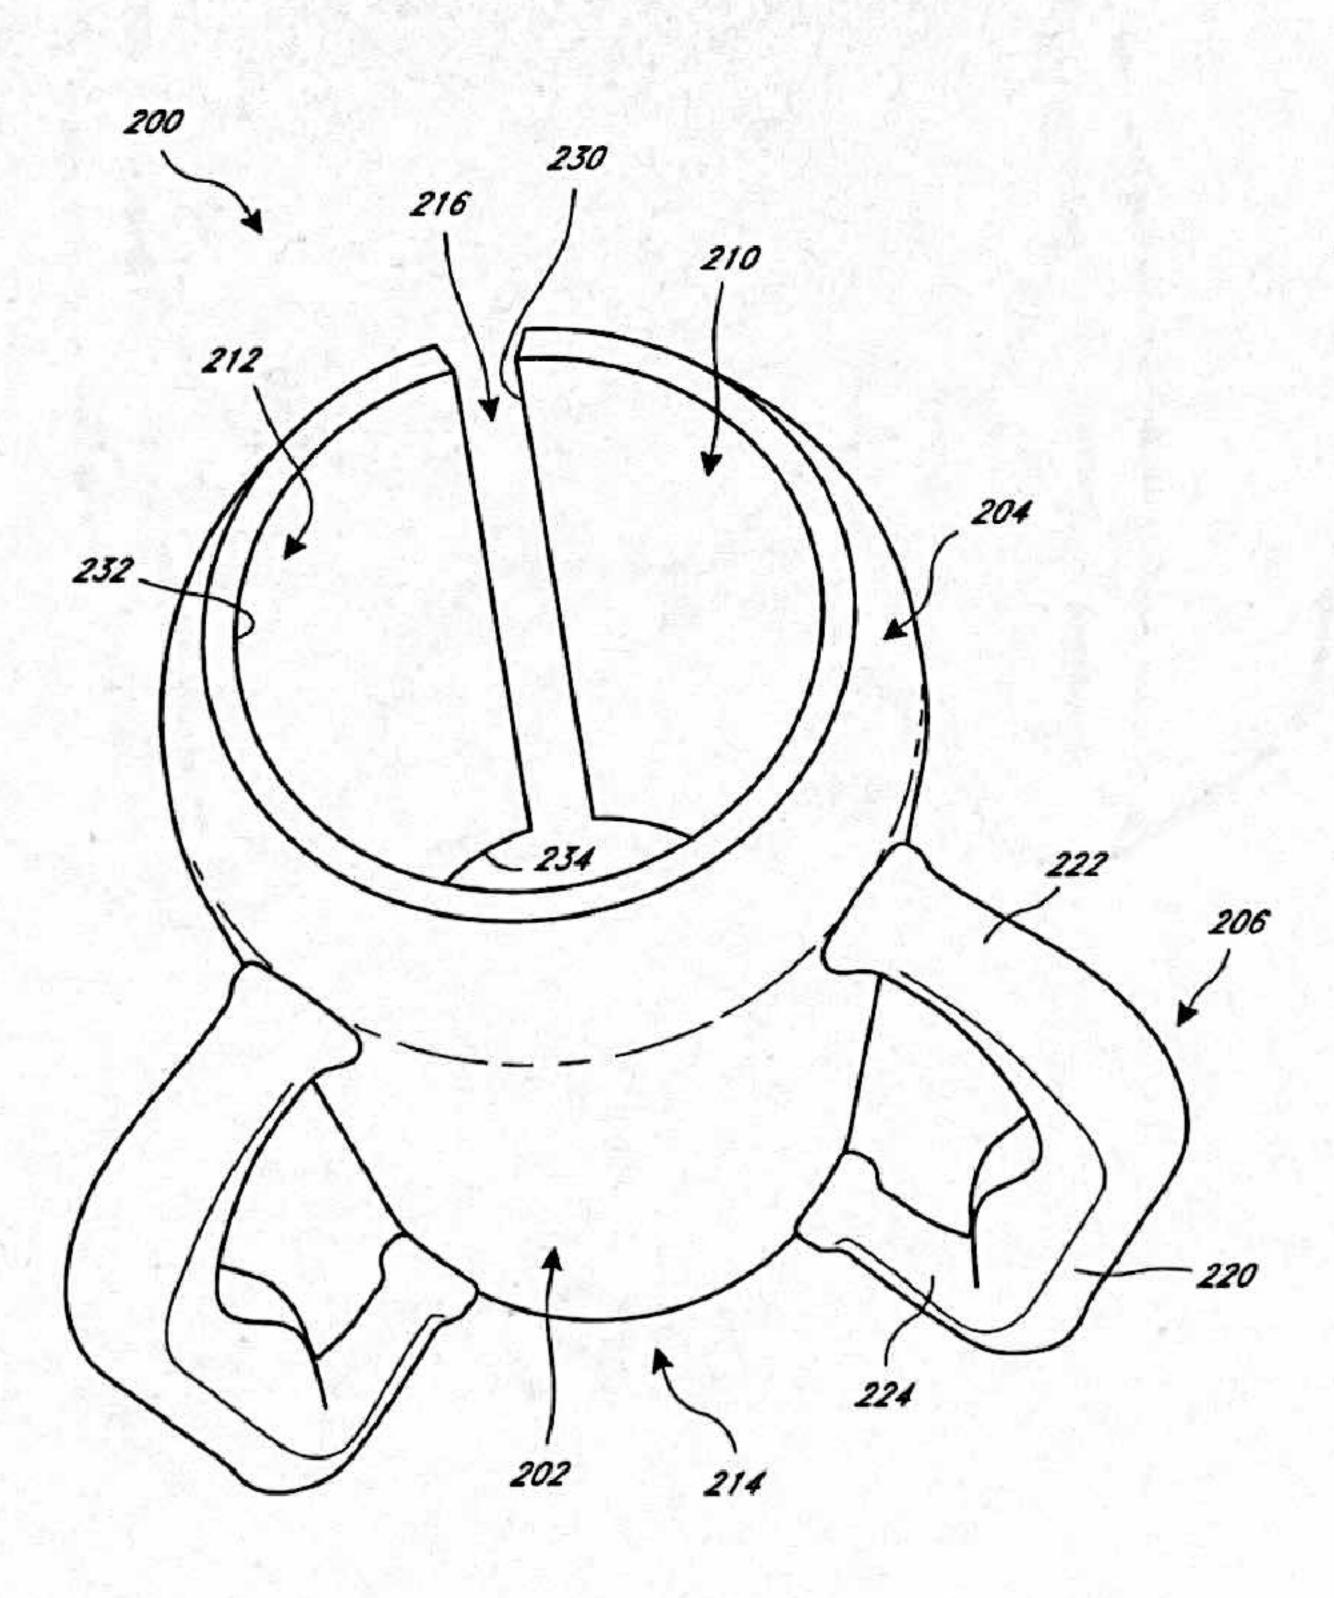



US009737464B2

(12) United States Patent

(10) Patent No.:

US 9,737,464 B2

(45) Date of Patent:

*Aug. 22, 2017

(54) BABY BOTTLE HOLDING DEVICES, SYSTEMS AND METHODS

(71) Applicant:

CA (US)

(72) Inventor:

CA (US)

(*) Notice:

Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-

claimer.

(21) Appl. No.: 15/184,093

(22) Filed:

Jun. 16, 2016

(65)

Prior Publication Data

US 2017/0065490 A1

Mar. 9, 2017

Related U.S. Application Data

(63) Continuation of application No. 14/678,391, filed on Apr. 3, 2015, now Pat. No. 9,370,468, which is a continuation of application No. 14/465,093, filed on Aug. 21, 2014, now Pat. No. 8,998,029.

(51) Int. Cl.

A61J 9/06 (2006.01) **A61J 11/00** (2006.01)

(52) U.S. Cl.

(58) Field of Classification Search

CPC A61J 9/0669; A61J 9/0623; A61J 9/06; A61J 11/00

USPC 220/737, 738, 739, 903, 23.91; 215/396, 215/395

See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

3,058,708	Α	10/1962	Murray et al.	
3,073,493	Α	1/1963	Pfaffenberger	
3,773,287	A	11/1973	Hechinger	
4,014,505	Α	3/1977	Dowd	
4,497,417		2/1985	Tabet	
4,723,801	Α	2/1988	Musumeci et al.	
4,941,579	A	7/1990	Lee	
4,943,017	A	7/1990	Ennis	
		(Con	tinued)	

OTHER PUBLICATIONS

International Search Report and Written Opinion received in copending International Patent Application No. PCT/US2015/045954, mailed Dec. 14, 2015 in 13 pages.


(Continued)

Primary Examiner — King M Chu
(74) Attorney, Agent, or Firm — Knobbe Martens Olson & Bear, LLP

(57) ABSTRACT

A support system for a baby bottle has a support body having a generally cylindrical portion. A channel is defined within the support body. A slot is defined between slot edges of the support body extending between a first end portion and a second end portion. First and second handle portions are coupled to the support body. The first and second handle portions are coupled to the support body at an angle less than about 120 degrees apart from each other about a surface of the support body. The support body is sized and configured to support a baby bottle positioned within the channel defined within the support body. In some embodiments, the first and second handle portions have handle grip portions that are coupled to the support body at an angle between about 5 degrees and about 30 degrees relative to a surface of the support body.

25 Claims, 8 Drawing Sheets

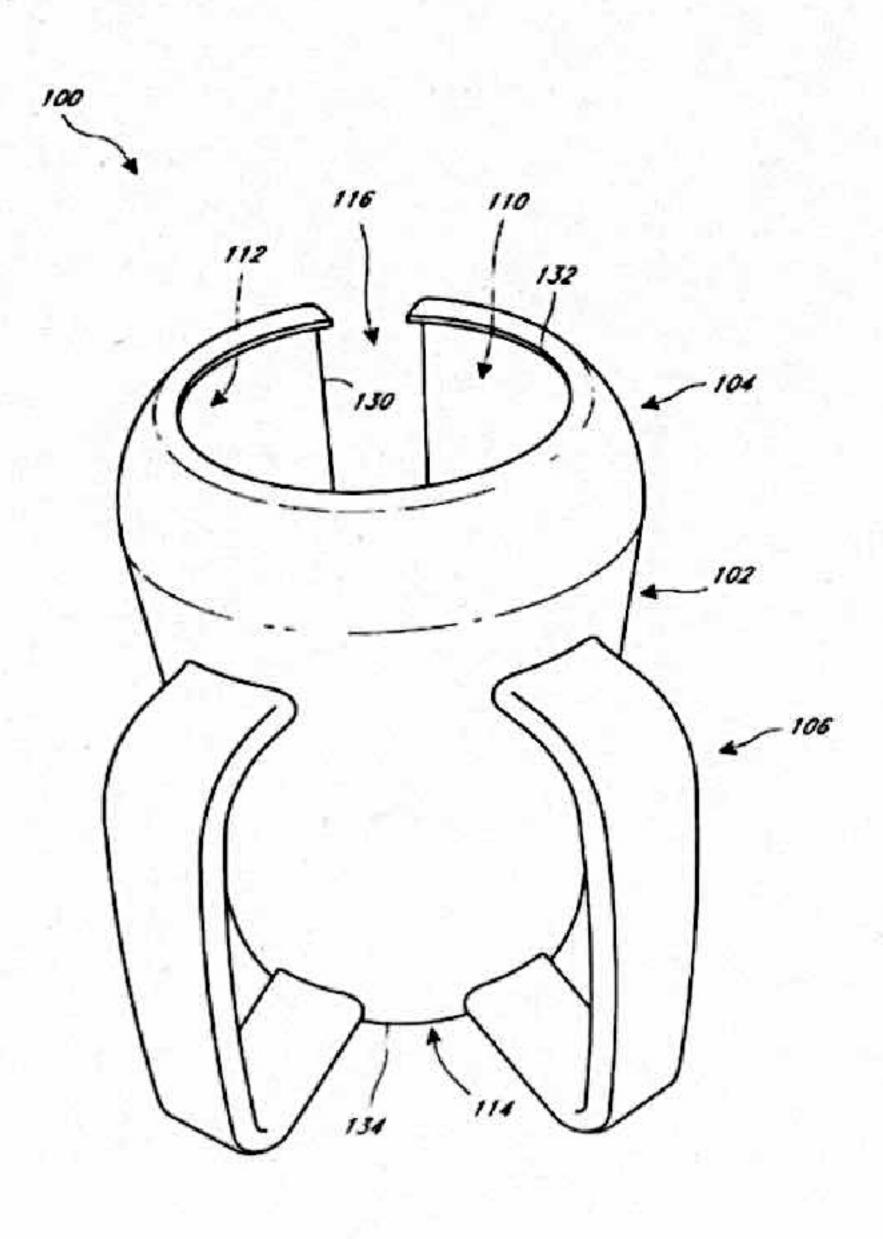



(12) United States Patent

(10) Patent No.:

(45) Date of Patent:

US 9,370,468 B2 *Jun. 21, 2016

54) BABY BOTTLE HOLDING DEVICES, SYSTEMS AND METHODS

(71) Applicant: CA (US)

(72) Inventor: CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: 14/678,391

(22) Filed: Apr. 3, 2015

(65) Prior Publication Data

US 2016/0051449 A1 Feb. 25, 2016

Related U.S. Application Data

- (63) Continuation of application No. 14/465,093, filed on Aug. 21, 2014, now Pat. No. 8,998,029.
- (51) Int. Cl. A61J 9/06 (2006.01)
- (52) U.S. Cl. CPC A61J 9/0669 (2015.05); A61J 9/0623 (2015.05)

(56) References Cited

U.S. PATENT DOCUMENTS

3,058,708	A	*	10/1962	Миггау		A61J 9/06 248/102
3,073,493	A	*	1/1963	Pfaffenb	erger A47	

3,773,287	A	*	11/1973	Hechinger A61J 9/06
				19/159 A
4.014.505	A	*	3/1977	Dowd A61J 9/06
			11,554-5-51562	2/18/105
4,497,417	A	*	2/1985	Tabet A47J 45/06
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	127			215/396
4.723.801	A	*	2/1988	Musumeci A61J 9/06
.,,,				248/102
4.941.579	A	*	7/1990	Lee A61J 9/06
.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				215/11.1
4.943.017	A	*	7/1990	Ennis A61J 9/06
.,,,,,,,,,,				215/11.1
5.060.816	A	*	10/1991	Robbins, III A47J 45/075
3,000,010				215/395
5 335 954	A	*	8/1994	Holub A45F 5/10
3,333,33				215/376
5 692 630 /	A	*	12/1997	Hsu A47G 19/2272
5,072,050 1				215/11.1

(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion received in copending International Patent Application No. PCT/US2015/045954, mailed Dec. 14, 2015 in 13 pages.

Primary Examiner — King M Chu
(74) Attorney, Agent, or Firm — Knobbe Martens Olson & Bear, LLP

(57) ABSTRACT

A support system for a baby bottle has a support body having a generally cylindrical portion. A channel is defined within the support body. A slot is defined between slot edges of the support body extending between a first end portion and a second end portion. First and second handle portions are coupled to the support body. The first and second handle portions are coupled to the support body at an angle less than about 120 degrees apart from each other about a surface of the support body. The support body is sized and configured to support a baby bottle positioned within the channel defined within the support body. In some embodiments, the first and second handle portions have handle grip portions that are coupled to the support body at an angle between about 5 degrees and about 30 degrees relative to a surface of the support body.

26 Claims, 8 Drawing Sheets

