

## RAINFALL MONITOR



Easily Measure and Send Wireless Rainfall Data to Your Desk for Analysis.

Commercial or Lab Grade Tipping Bucket Included

AC , DC or Solar Power Kits

Rugged Design with Clear View Window and LCD

Optional 4G or WiFi Wireless Connectivity

### SCADASiren™

The SCADASiren™ is a multi-application wall mount monitoring system with LCD and flow totalizer. Multiple SCADA output options are available including 4-20 mA, RS485, serial and analog output modules.

Optional USB allows for onsite data collection not requiring external connection to a field computer to collect data.

Automatically upload data for analysis to BlueLive<sup>®</sup> Cloud, DropBox<sup>®</sup>, GoogleDrive<sup>®</sup> or FTP location of your choice. Future proof worldwide LTE wireless module supports multiple countries and cellular frequencies, WiFi option also supported.

Built-in multi-media platform allows direct connection of our vision camera taking simultaneous pictures that correlate directly with sensor readings. Receive alarm emails with not only critical data but also images supporting the condition.

Automatically upload data for analysis to BlueLive<sup>®</sup> Cloud, DropBox<sup>®</sup>, GoogleDrive<sup>®</sup> or FTP location of your choice. Future proof worldwide LTE wireless module supports multiple countries and cellular frequencies, WiFi option also supported.

### SPECIFICATION

**Enclosure:** 10 x 8 x 4in (HxWxD), wall mount, fiberglass reinforced polyester, gray, single-door, (2) twist-lock latches, SAR acrylic window.

**Data Storage** Internal Storage - 2.5 yr@15 min Sample Rate  
USB - over 20 years

**Total Images** Internal Memory 500 (640x480) Images, USB over one million, Storage changes with image resolution"

**Output:** RS485, Sampler Pulse, LCD

**Power:** Logger: 3.3 V, Internal: 12 V, External: Max 16 V

**Operating Temp.** -40 to 60°C (-40 to 140°F)

**Connectors:** Spring Load Compression Fit

**Power:** Internal 12 V AC / DC Power Supply

**Sample Rate:** User Defined, 1 to 60 minutes

**Software:** Field-Siren Windows GUI, Cloud Programmable

**Protocol:** Compressed Binary

**Wireless:** World Wide Cellular: 4G LTE and WiFi

**Data Transfer:** Blue-Live<sup>®</sup> - DropBox<sup>®</sup> - GoogleDrive<sup>®</sup> - FTP

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION, DESIGN OR OTHERWISE. ... It shall be the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

### Monitor With Vision<sup>®</sup>





# Economical Rain Gauge Sensor Product Specification Sheet



Meets National Weather Service Specifications

Transmits Data Up To 300ft

Capable Of Connecting Up To 3 Rain Gauge Sensors

Self Emptying

Insect/Debris Screen Provided

## Technical Specifications:

Body Material: High Impact Polypropylene, UV Inhibited

Transducer: Tipping Bucket

Transducer Material: Specially Formulated Plastic For Low Surface Tension

Switch: Dry Reed Switch

Output: Less Than 0.1 Second Switch Closure

Capacity: 6 - 24V DC

Certifications: Meets National Weather Service Statistical Accuracy

Capacity: Self Emptying

Resolution: 0.01 in  
0.25 mm  
0.2 mm  
0.1 mm

Accuracy: 1% at 0.5 in/hr

Cable: 50ft Standard

## Self Emptying Rain-Gauge

Large 8" Diameter collector bucket meets NWS specifications for statistical accuracy. Every gauge is factory calibrated and tested for 1/100" increment measurements.

This specific gauge set today's rainfall monitoring standard with the original tipping bucket patent obtained in 1974.

Lab Grade Rain-gauges also available



ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION, DESIGN OR OTHERWISE. ... It shall be the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.



# INDUSTRIAL 5MP VISION SENSOR

5MP Camera Sensor with High Output LED Ring

Multiple Resolution and Compression Settings

Maximum 5MP resolution

Built-in Compression

Encapsulated Electronics

## Monitor With Vision®

The Blue Siren® 5MP high output LED Camera Sensor is great for thousands of applications: sewer pipes, grease clogging, inflow and infiltration problems, monitor storm grates and implement camera based infrastructure security.

Automatically store images and send them to any server or website. Subscribe to the BlueLive® Database and see your images as they upload. Sensor readings automatically correlate with image time stamps, allowing more in-depth analysis of system conditions.

The Camera Sensor is constructed using impact resistant urethane and encapsulated using optically clear epoxy. Air is fully vacuumed out of each sensor leaving no room for condensation or moisture.

## Technical Specifications:

Pixel Resolution : 2592x1944 (Default), 2048x1536, 1920x1080, 1600x1200, 1280x960, 1024x768, 800x600, VGA, QVGA, 160x120

Sensor: 1/4" CMOS

Baud Rate: 115200bps (default), 19200bps, 38400bps, 57600bps, optional

Angle of View (FOV): 60 degree (default), 120/90/45/30/15/8 degree Optional

Focal Length: 3.6mm (default), 2.8mm/6mm/8mm/ 12mm/ 16mm/25mm Optional


White Balance: Automatic

Operating Temperature: -4°F-140°F

Sample Rate: Minimum 1 minute

Auto Gain Control: Automatic

Exposure: Automatic

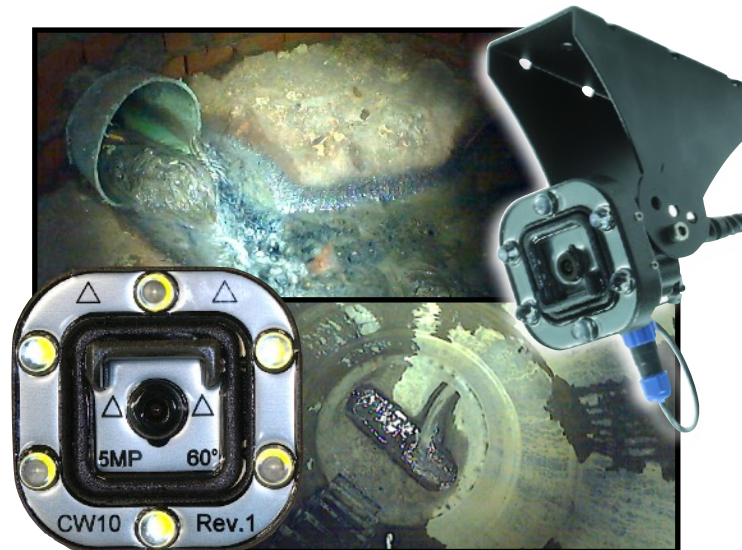

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION, DESIGN OR OTHERWISE. ... It shall be the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.



# DATA MANAGEMENT

## Wireless Cloud Delivery and Data Analysis

*View and Analyze Real Time Data*

*Automatic Delivery to Hosting Provider of your choice, DropBox®, Google Drive®, FTP, email, BlueLive®*

*Batch View Line and Scatter Plots*

*Manage Large Networks*

*Multiple End Users, No Additional Fees*



### FLEXIBLE DATA PLAN AND DELIVERY OPTIONS:

Automatically upload monitor data to BlueLive®, DropBox®, GoogleDrive®, email, or a FTP location of your choice. The internal worldwide 4G LTE wireless module supports multiple countries and cellular frequencies. In addition, WiFi connectivity options also available for infrastructure implementation. Provide your own SIM card and cellular network or have Blue Siren provide one for you. Blue Siren has low cost options on major networks such as AT&T® and Verizon Wireless®.



ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE. ... It shall be the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.