

# DLED30-D DMX

Studio fixture, also useful for mobile drama  
The most powerful of our focusing LED lights

- 320 W daylight light source
- TLCI 96
- Dimming control: manual and DMX
- Double, non-spherical optics
- Active cooling system
- Huge focus range,  
wider and narrower than others
- Equipped with DMX control as standard
- Options: pole operated or motorized



**DT30**



**DPOW30**

**DCAB3A-SW**

**DLED30-D daylight version**

- Can be used with all of our optical attachments from the non-spherical wide-angle attachment all the way to the parallel beam attachment, which doubles the light output and is eminently suitable for reflected light (also multiple reflections within the new Lightstream system).



**DP1200KU**




**DLWA1200R**




**DPBA-L18**

## Technical Data DLED30:






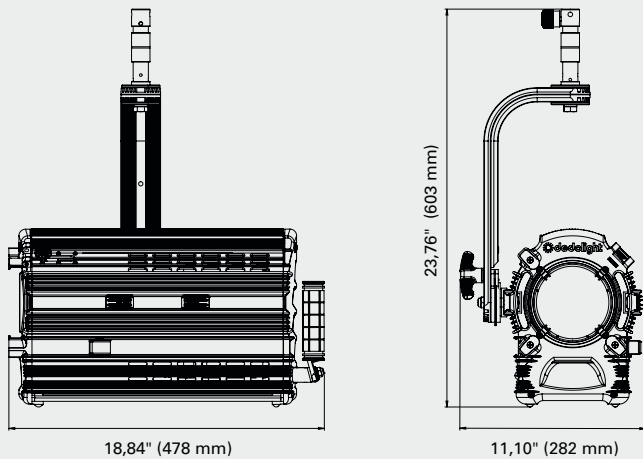


## Technical Data DT30:

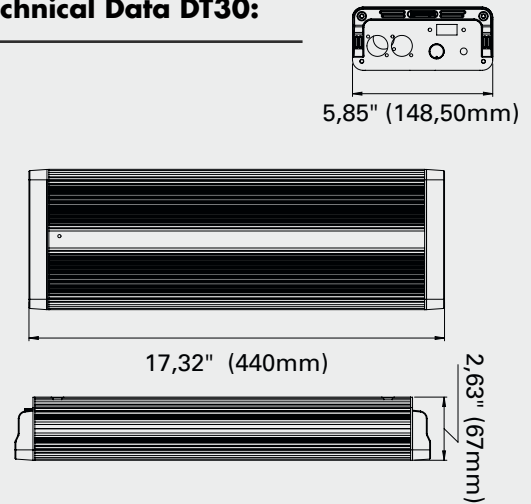

### DLED30-D

Focusing range	65° - 4°
Intensity range	1 : 13,8
CCT	5650
CRI Ra	95
CRI Re	94
TLCI	96
Delta UV	-0.0009
Lux in 3 m flood position	1.300
Lux in 3 m spot position	18.000
Lux in 3 m with parallel beam attachment DPBA-L18	26.500
Input voltage	90 - 264 VAC
Power consumption	320 W
Size	478,1 x 336,4 x 603,5 mm 18.8 x 13.2 x 23.8 inches
Weight	16,5 kg 36.4 lbs

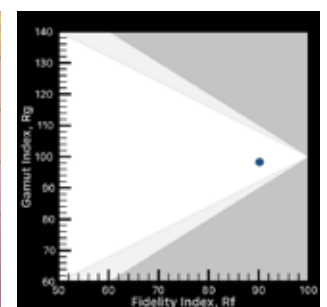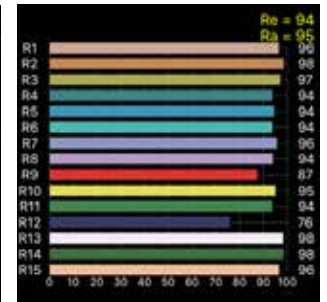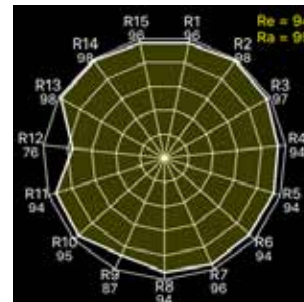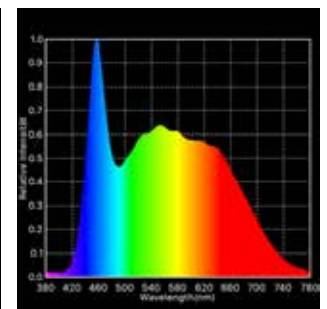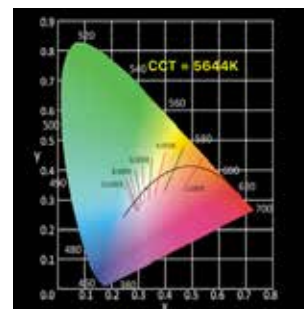

### DLED30-D daylight

distance	Meter	1	2	3	5	10	15	20
Flood	Lux	11.700	2.925	1.300	468	117	52	29
Medium	Lux	26.000	5.727	2.990	1.075	269	120	67
Spot	Lux	162.000	40.500	18.000	6.480	1.620	720	405



info@dedoweigertfilm.de  
www.dedoweigertfilm.de

### Dedo Weigert Film GmbH

Karl-Weinmair-Straße 10  
D-80807 Munich, Germany

Phone: +49-(0)89 - 356 16 01  
Fax: +49-(0)89 - 356 60 86