



EverBlock® Systems, LLC.

844-422-5625

790 Madison Avenue, Suite 506, New York, NY 10065

www.everblockflooring.com

EverDance Portable Dance Floor

SPECIFICATION SHEET



EverDance™ is EverBlock's interlocking modular dance floor system. It can be used for a variety of applications, indoors and outdoors at hotels, dance halls, in tents, at convention centers, and anywhere a dance floor is required.

The **EverDance** tile consists of a molded base, with a proprietary molded-in woodgrain pattern (or alternative printed pattern of your choice). Because the pattern is fully integrated with the base tile, the floor is completely water proof and will not peel, delaminate, or get waterlogged.

The **EverDance** interconnects with adjacent tiles to create a seamless dance floor surface and a solid support base for all types of activities. From studio flooring, to party dance floors and from tent floors to general purpose event floors, **EverDance** is a versatile system that connects to **EverBase** and **EverBase 2** seamlessly, allowing for multiple versions of the floor to be used on the same site. Dance floors can be positioned within general purpose event floors for the ultimate in tent flooring.

MODULE SIZES

Item	Description	Length	Width
EBFD	EverDance	12" (30.48 cm)	12" (30.48 cm)
		Thickness	Weight
		1.1" (2.79 cm)	1.27 lb. per tile

MATERIAL

Hi-Impact Polypropylene Co-Polymer ("no-break"), Scratch Resistant Polymer Surface

COLORS *Custom patterns and printed designs available with minimum order sizes


Dark Wood Parquet (DW) Light Wood Parquet (LW)

Grey Plank (GP)

Light Wood Plank (LP)

White (W)

Black (B)



FIRE RATING

UL94HB (Underwriters Laboratory Test):

*This test signifies that **EverBlock** does not flare up when exposed to an open flame and has a slow burn rate of 2" per minute for a 2" wide, 0.5 millimeter thickness test sample. EverBlock meets all applicable standards for temporary floor covers.

Hot wire ignition rating: **3**

ASTM 2859 (Flammability Of Finished Textile Floor Covering Materials): **PASS**

SHIPPING QUANTITIES

Standard Pallet:	40" x 48" x 84	smaller quantities may be ordered	630 sq/ft
53ft Truckload Quantity:	26 Pallets		16,380 sq/ft
20ft Ocean Container:	10 Pallets		6,300 sq/ft
40ft Ocean Container:	20 Pallets		12,600 sq/ft
40ft High Cube Ocean Container:	20 Extra Tall Pallets		12,600 sq/ft
Military 463L Pallet (88" x 98" x 96"):	2,400 sq/ft maximum loading		

WEIGHT LOADING CAPACITY: 8,500 lbs. sq/ft

*On a solid subsurface, non-moving (static) weight, with equal distribution of load across the tile surface. **Support Structure:** Intersecting bi-directional support ribs provide structure, torsional strength, and additional weight distribution and weight loading capabilities.




AVAILABLE ACCESSORIES

Transition Edging: Male Edge, Female Edge, Corner Piece

Transition Edging is recommended for pedestrian access points and areas where wheeled equipment or pedestrians are expected to come on to the floor.

Transition Cart:

Heavy duty wheeled cart that allows for easy transport and storage of flooring.

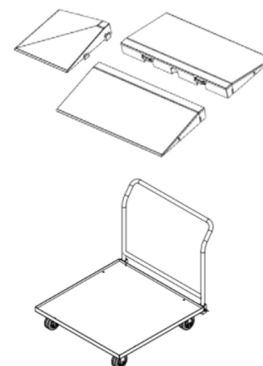

USES OF EBFD:

EverDance may be used for numerous applications

- Tent Flooring
- Hotel Dance Floors
- Home Dance Floors
- Basement Flooring
- Dance Studio Flooring
- Gym Flooring
- Tent Floors
- Exhibit Floors
- Practice Floors

EVERDANCE FEATURES

EverDance incorporates unique functional features that distinguish it from competitors

- Unique modular design allows sections to be connected to create nearly any sized floor
- Proprietary connection system allows for quick installation and removal WITHOUT any tools
- Lightweight construction for easy handling and transport
- Durable cross ribs add structural support, increase weight loading capacity and provide torsional stability
- Integrated cable channels allow for networking and power cables to be run underneath the flooring
- May be installed on top of EverBlock modular building blocks, allowing floors to be raised
- UV protected
- Fully waterproof and chemical resistant and may be used indoors and outside
- 100% recyclable

WARRANTY



Standard 3 year warranty against manufacturer's defects.