



LATITUDE™ TAIL LIGHT & PLATE HOLDER FOR ULTRA & LIMITED WITH LIGHTSTRIKE™

- WARNING** This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.
- CAUTION** This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.
- ATTENTION** This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Ciro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation. Read completely and understand the instructions prior to starting installation.

NOTE: Ciro products are designed and manufactured under very strict quality control. Ciro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a limited lifetime warranty against LED failure. Ciro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed, unmodified and maintained. Ciro will not be liable for any consequential and incidental damages, including labor, or non-Ciro products. Please visit Ciro3d.com for our complete warranty policy.


Included Items



Installation Instructions:





1. Park on a level surface and ensure motorcycle has time to cool. Protect motorcycle from scratches by applying tape and protective cloth around areas to be worked on.
2. Remove two screws on either side of light and unplug four pin connector. Set aside. Fig. 1
3. Remove phillips screw from tail light base. Fig. 2
4. Remove nut retainer clip from fender mount and save with other OEM parts. Fig. 3
5. Flex license plate in frame and slide under tabs at top of frame. Fig. 4
6. Place frame over plate holder with tabs over notches at top. Secure with locking screw at bottom. Locking screw must be behind license plate. Fig. 5
7. Mount light and frame assembly to tail light base. Plug in four pin connector and left and right turn signal connectors. Note: purple wire for left side and brown wire for right side. Test lights to ensure they function correctly as installed. Fig. 6
8. Use two provided screws to attach light assembly to tail light base.
9. Place washer and Nyloc nut onto bolt behind fender and securely tighten.

Note: Download Lightstrike™ app at Apple App Store or Google Play Store to use Lightstrike™ features.

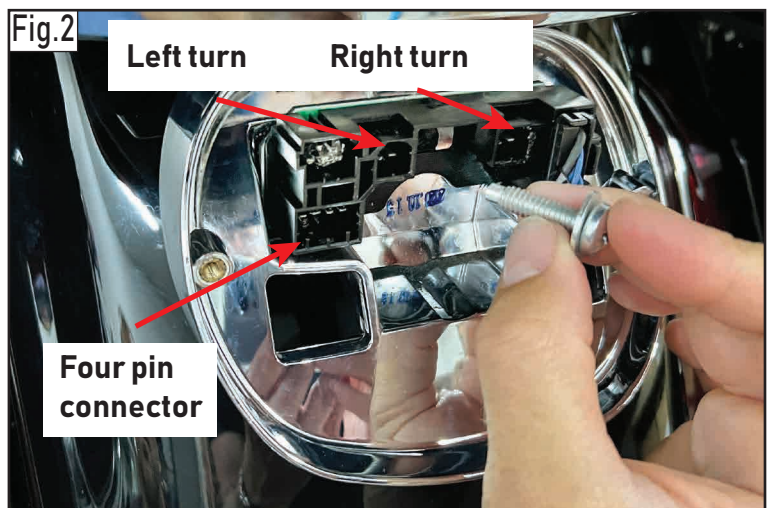

Scan this QR code to see a video demonstrating Lightstrike™ features and options.



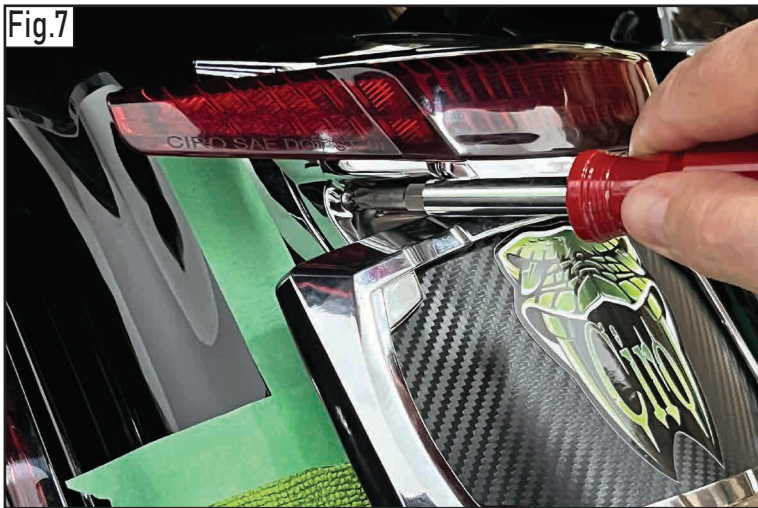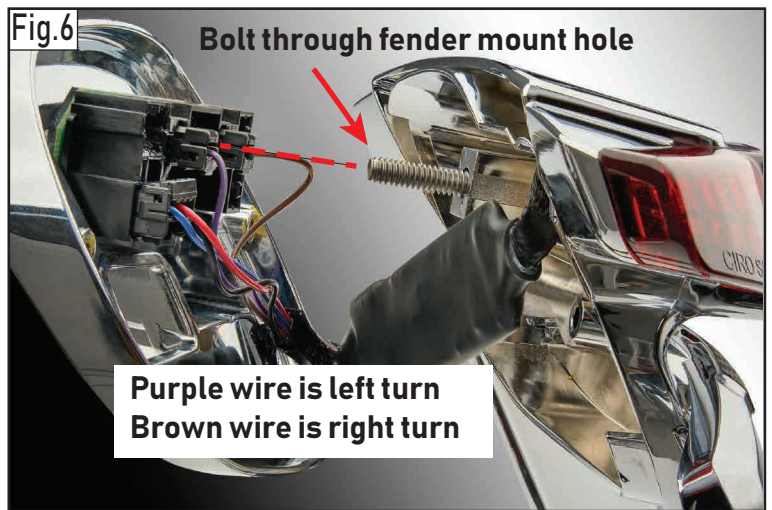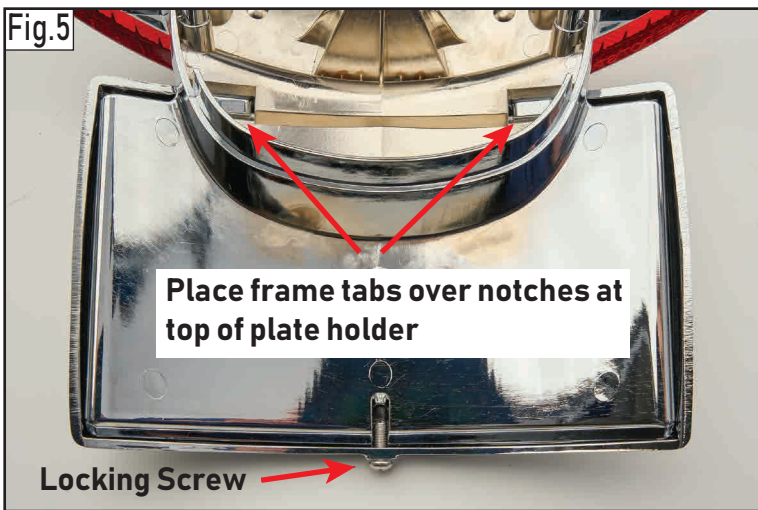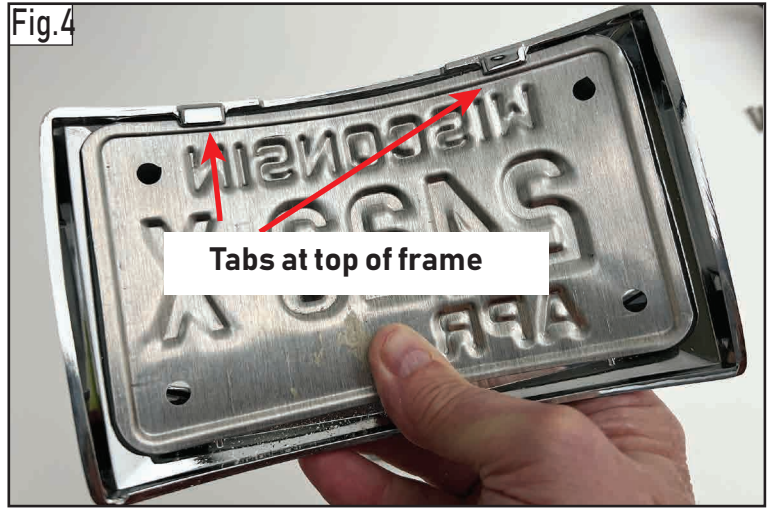

FCC STATEMENT Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: Reorient or relocate the receiving antenna. Increase the separation between the equipment and receiver. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. Consult the dealer or an experienced radio/TV technician for help. This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.