



TAIL LIGHTS FOR TRI GLIDE

WARNING This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.


CAUTION This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Ciro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation. Read completely and understand the instructions prior to starting installation.

NOTE: Ciro products are designed and manufactured under very strict quality control. Ciro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a limited lifetime warranty against LED failure. Ciro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed, unmodified and maintained. Ciro will not be liable for any consequential and incidental damages, including labor, or non-Ciro products. Please visit Ciro3d.com for our complete warranty policy.

Included Items:

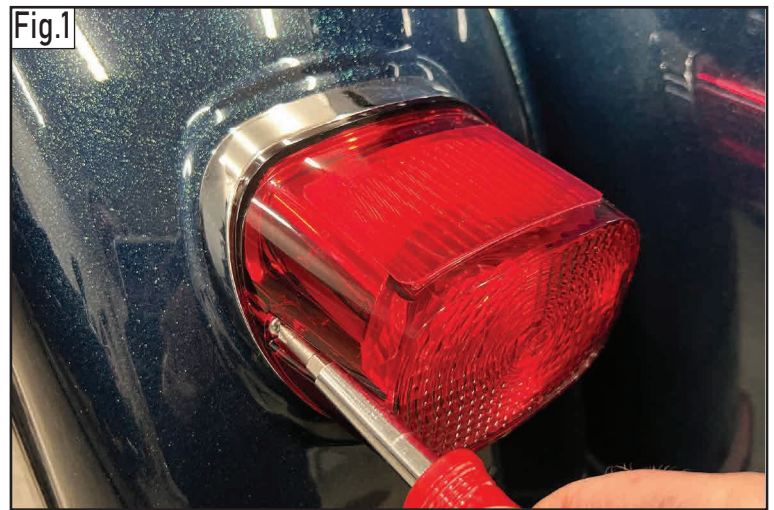

Installation Instructions:

1. Park on a level surface and shut off the motorcycle. Ensure that the engine has time to cool before installation.
2. Remove two screws from OEM light and save for reuse. Fig. 1
3. While holding light, press up on tab on underside of 4 pin connector and unplug. Fig. 2
4. Insert the new tail light's 4 pin connector until it clicks into place. Fig. 3
5. Insert the two saved screws for the light and tighten.
6. Place the trim piece over indentation on light and push until both sides click into place. Fig. 4
7. Repeat steps 2-6 on other side of motorcycle.

NOTE: To switch between trim piece options, use a plastic wedge tool to gently lift trim piece off light on both sides to release.

