




HORIZON LED WINDSHIELD TRIM FOR ROAD GLIDE

Parts Included:


- 1 Right trim assembly
- 1 Left trim assembly
- 1 Hardware kit (4 windshield screws, 4 zip ties)

Installation Instructions:

1. Remove windshield screws (circled below) and remove windshield. (Fig. 1)
2. Lift the front edge of plastic vent to disengage plastic clips and remove. (Fig. 1)

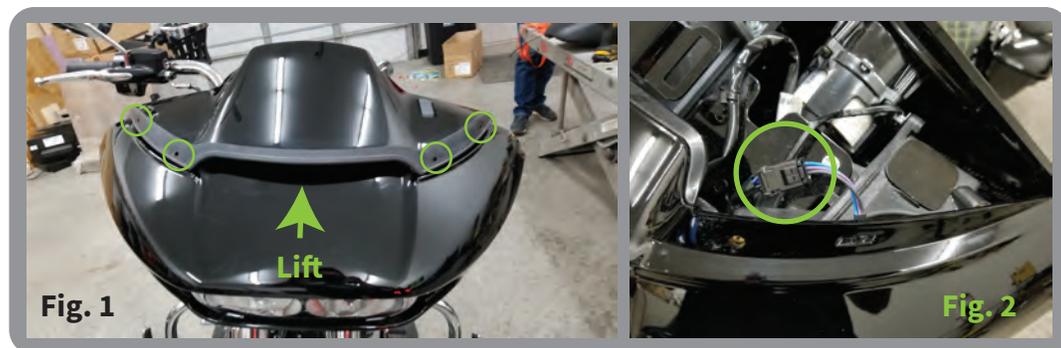

3. Locate the lighting plugs on both the left and right side of the fairing circled above. (Fig. 2)
4. Plug in the left and right windshield trim circuit boards and check for function. (Fig. 3)

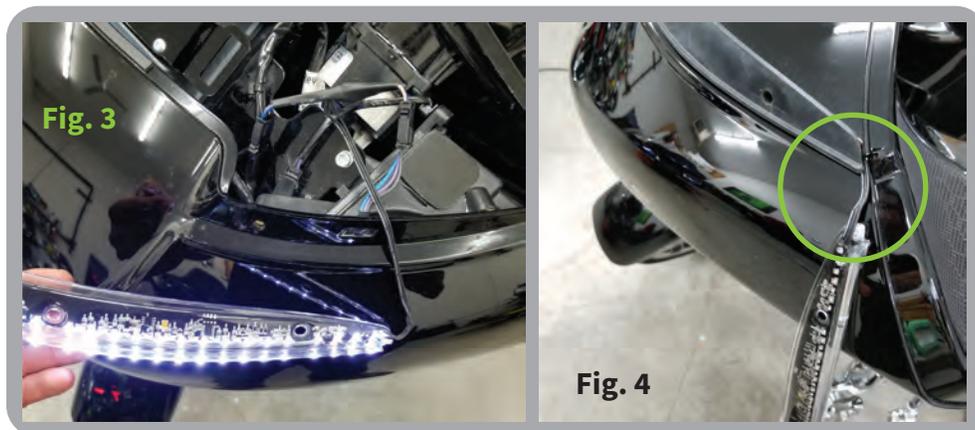

5. Re-install the plastic trim from step 2, with about an inch of wire for the lights routed out of the corner above the speaker as seen in Fig. 4.
6. Set the windshield on the fairing, then set the gasket for the circuit board on the windshield. You may then install the circuit board using the included screws.



7. Route the wire as seen in Fig. 5 through the gap at the bottom of the lens. Make sure that the wire is out of the way of the screw you will be installing at the end of the trim. (Circled in red)

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Giro products are designed and manufactured under very strict quality control. Giro warrants that products sold to the original purchaser shall be free from any defects in materials and workmanship for a period of 3 (three) years from the date of purchase, and a lifetime warranty against LED failure.


Giro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Giro will not be liable for any consequential and incidental damages, including labor, or non-Giro products.

Please visit our website Ciro3d.com for our complete warranty policy.

8. Hook the tab of the metal trim (red) on the front edge of the clear lens (green). (Fig. 6)

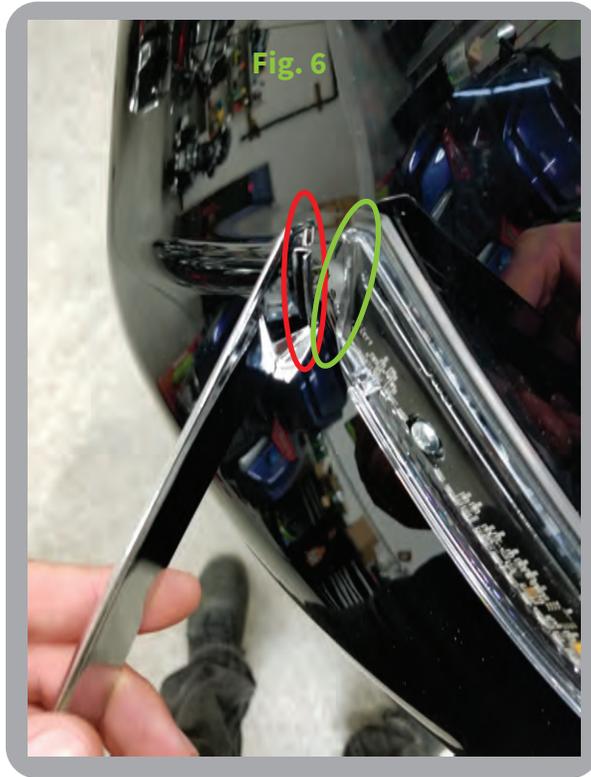

9. Install the set screw at the end of the trim. (Fig. 7)



10. Test for LED run and turn functions.