



CIRO SERVO COVER

Parts Included:

- 1 Servo Cover
- 1 Hardware Kit Including:
 - 2 3/8-16 x 1.25" Breather bolts
 - 1 Gasket


Installation Instructions:

1. Park on a level surface and shut off the bike.

Ensure that the engine has had time to cool before installation.

2. Remove your stock air cleaner using a 5/16" allen for the main center bolt, a T27 torx for the three bolts holding the filter, and a 7/16" socket for the breather bolts. *Note: The breather bolts are located behind the rubber hose/boots on the heads.

3. Remove the paper from the back of the gasket and place it on the throttle body making sure to align the holes. Install the 1.25" breather bolts at this point as well. You may now plug the OEM black rubber breather hose back onto the breather bolts. *For model 35131 trim included rubber hose to length and install as shown below.

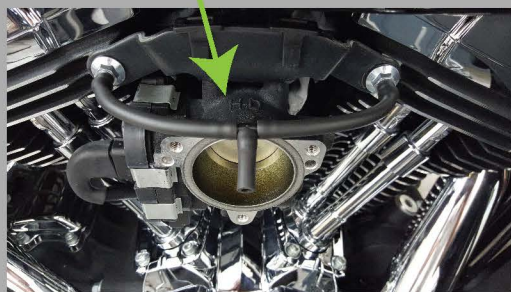

4. Feed the breather tube through the top hole of the servo cover. If your air cleaner came with a gasket, you may line up the holes and apply it to the servo cover now.



5. You are now ready to mount any standard three bolt pattern air cleaner on your bike. Please refer to the instructions included with your new air cleaner.

**Example air cleaner base plate mounted*

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Giro products are designed and manufactured under very strict quality control. Giro products are warranted to be free of defects in material and workmanship for 1 (one) year from date of purchase by the consumer.

Giro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Giro will not be liable for any consequential and incidental damages, including labor, or non-Giro products.

Please visit our website Ciro3d.com for our complete warranty policy.