



TRI-BAR AIR CLEANER

Parts Included:


1	Air Cleaner Cage	1	Backing Plate
1	Air Filter	1	Mesh Basket
1	Cage Mounting Plate		
	Hardware Kit Including:		
1	Tri-bar Snap Nut	1	Gasket
3	1/4-20x1.75" Bolts	3	1/4" Split Lock Washers
1	1/4-20x1.5" Phillips bolt	1	Snap Cup Washer
2	3/8-16x1.5" Breather Bolts		

Installation Instructions:

1. Park on a level surface and shut off the bike. Ensure that the engine has had time to cool before installation. *Ciro recommends using blue thread locker on all bolts in this installation.
2. Remove your stock air cleaner using a 5/16" allen for the main center bolt, a T27 torx for the three bolts holding the filter, and a 7/16" socket for the breather bolts. *Note: The breather bolts are located behind the rubber hose/boots on the heads.
3. Remove the paper from the back of the gasket and place it on the throttle body making sure to align the holes. Install the included breather bolts at this point as well. Tighten to 10-12 ft. lbs. You may now plug the DEM black rubber breather hose back onto the breather bolts.



- 4a. Feed the breather tube through the top hole of the backing plate.
- 4b. Using the (3) 1/4-20x1.75" bolts and 1/4" split washers, bolt the cage mounting plate and backing plate the throttle body.
5. Stack the filter, mesh basket, and air cleaner cage on the backing plate, in that order.
6. Use the 1/4-20x1.5" phillips screw and snap cup washer (facing outward) to bolt the air cleaner cage to the threaded center hole of the cage mounting plate.

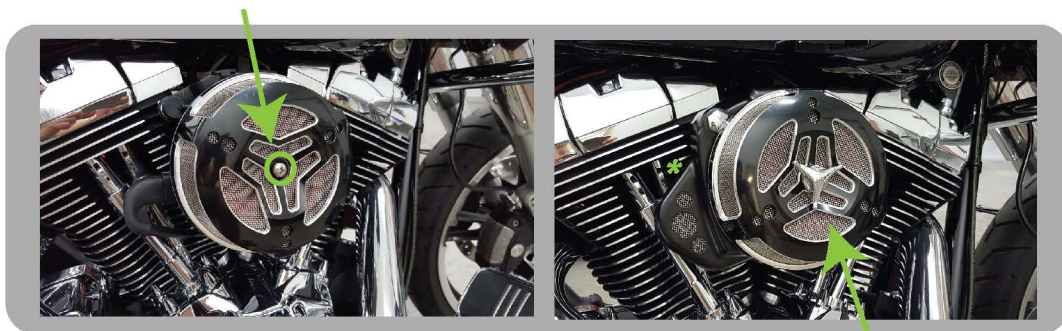

7. Line up the pin of the tri-bar snap nut with the hole on the air cleaner cage and press the snap nut on.

*Pictured with **Ciro Servo Cover part #35130**

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All **Ciro** products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Ciro products are designed and manufactured under very strict quality control. **Ciro** products are warranted to be free of defects in material and workmanship for 1 (one) year from date of purchase by the consumer.

Ciro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Ciro will not be liable for any consequential and incidental damages, including labor, or non-**Ciro** products.

Please visit our website Ciro3d.com for our complete warranty policy.

CIRO3D.COM