




ACTION CAMERA MOUNT FOR ROAD GLIDE

Parts Included:	1	Flat Washer
1 Camera Mount	1	M5x.8x20mm BSCS
1 Spacer for Trim	1	M5x.8 Nylon Insert Locknut
1 Collet Nut	1	#10-32 x 1" BSCS
1 Action Camera Adapter	1	#10-32 x 1-1/4" BSCS

Installation Instructions:

- 1. Park on a level surface and shut off the motorcycle. Ensure that the engine has had time to cool before installation.**
- 2. If installing on a Road Glide *without* windshield trim, remove #10-32 screw from windshield then use the medium sized screw and flat washer to fasten the ball mount to the windshield. Tighten on windshield per factory manual.**

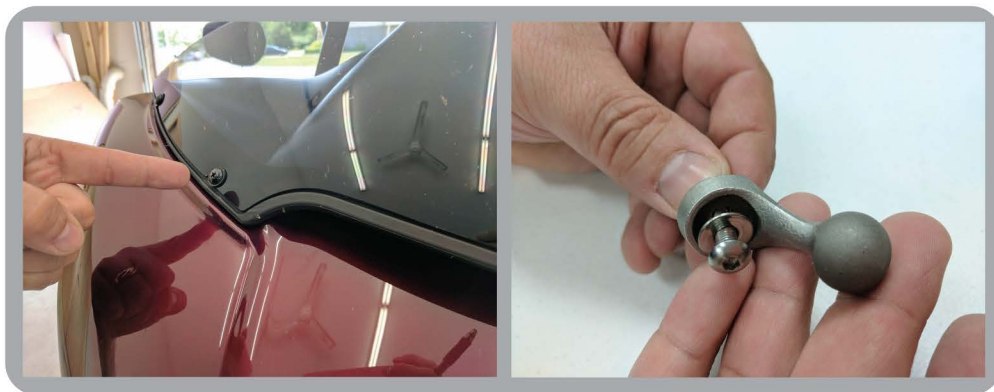

- 3. If installing on a Road Glide *with* windshield trim, remove one of the screws that is holding on the trim. This will be where the Action Camera Mount is installed. With trim still in place, use the longest screw, flat washer and spacer to fasten the ball mount to the windshield. Tighten on windshield per factory manual.**

- 4. Slide the collet nut over the ball mount and snap on the camera adapter. Thread the nut over the plastic and tighten so that your camera is secure.**

Note: Included shortest screw and nut is used for attaching camera to the supplied adapter.

Note: This mount can be used with any 1/4" customer supplied fastener for universal applications.

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Giro products are designed and manufactured under very strict quality control. Giro products are warranted to be free of defects in material and workmanship for 1 (one) year from date of purchase by the consumer.

Giro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Giro will not be liable for any consequential and incidental damages, including labor, or non-Giro products.

Please visit our website Ciro3d.com for our complete warranty policy.

CIRO3D.COM