



SERVO HARNESS COVER

Parts Included:

- 1 Servo Harness Cover
- 1 Bracket
- 2 8-32x7/8" Button Head Screws

Installation Instructions:


1. Park on a level surface and shut off the motorcycle. Ensure that the engine has had time to cool before installation.

2. Unplug servo harness connector by pinching tab on backside. Use an ammonia-based cleaner to remove any contaminants on the connector.




3. Remove the two button head screws and bracket from cover using a 3/32" hex wrench.

4. Test fit cover on front side of connector by aligning the edges to each other.

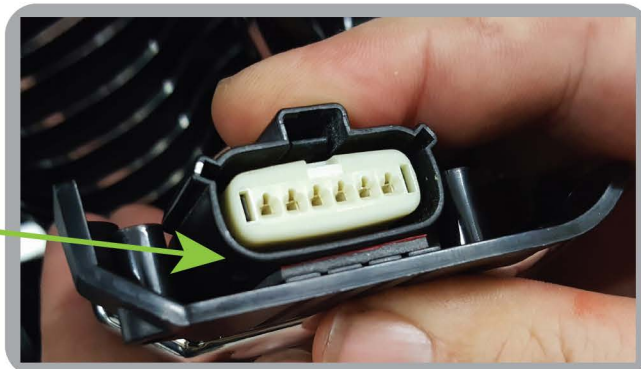

5. Activate adhesive square by rubbing with fingernail, then remove adhesive backing. Press and hold cover firmly against connector for 60 seconds. Adhesive fully cures within 24 hours.

6. Lay bracket on tab side of connector and reinstall screws to hold cover in place. Tighten until snug.

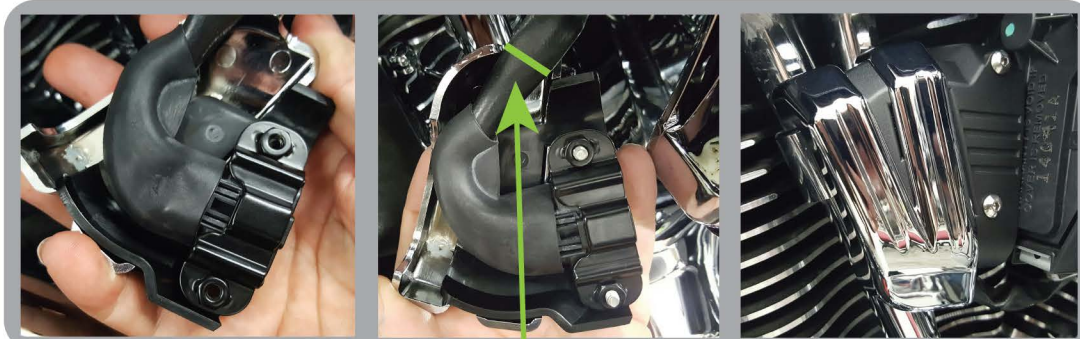

7. Make sure harness cable sits in groove so it does not become pinched, then reinstall servo harness connector. Listen for the click to confirm it is plugged in all the way.

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Giro products are designed and manufactured under very strict quality control. Giro products are warranted to be free of defects in material and workmanship for 1 (one) year from date of purchase by the consumer.

Giro will have no obligation if the customer cannot show proof of purchase.

Warranty will not be granted unless the part is properly installed and maintained.

Giro will not be liable for any consequential and incidental damages, including labor, or non-Giro products.

Please visit our website Ciro3d.com for our complete warranty policy.

CIRO3D.COM