



SHIFT LINKAGE COVER

Parts Included:


- 1 Shift Linkage Cover
- 1 Shift Arm Cover
- 1 Rear Shift Lever Cover
- 1 Hardware Kit Including:
 - 2 6-32 x 3/8" Socket Head Cap Screws
 - 2 Split Lock Washers
 - 1 Retainer Plate

Installation Instructions

1. Park on a level surface and shut off the motorcycle. Ensure that the engine has had time to cool before installation.
2. Using a 7/16" and 1/2" wrench, loosen and remove hardware from shift rod in front and rear. Set aside hardware and rod for use later.



3. Assemble shift linkage cover with shift rod and set black retainer plate in place. Use included socket head cap screws and split lock washers to secure shift rod. Tighten with 7/64" hex wrench. Be sure shift rod bolts are at a 90° angle from the cover.
4. Assemble shift rod with shift arm cover by positioning bolt head in recessed hex, then reinstall shift rod. Reuse spring washer between nut and bolt. Use a 7/16" wrench to tighten and torque to 70-90 in-lbs.
5. Set rear shift lever cover in place over rear shift arm. Reuse spring washer between nut and bolt and use a 7/16" wrench to tighten. Torque to 70-90 in-lbs.
6. Check and securely tighten all fasteners. Test gear shift lever for correct function.

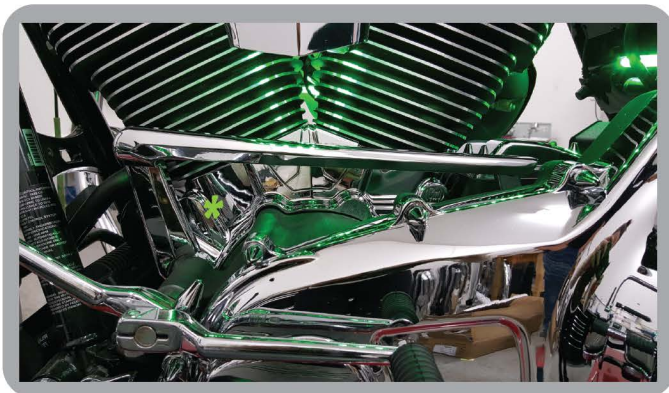

* Pictured with Giro Cylinder Base Cover part #70200

G0072000, REV. -

WARNING:

This indication alerts you to the fact that ignoring the contents described herein can result in potential serious injury or death if not followed.

CAUTION:

This indication alerts you to the fact that ignoring the contents described herein can or will result in material damage and/or personal injury.

ATTENTION:

This indication alerts you to the fact if you ignore this detail you will affect the performance or functionality of the product.

All Giro products are designed for "easy assembly" and/or "plug and play". We recommend a competent mechanic install our products, using standard mechanical procedures to assure a safe and successful installation.

NOTE:

Giro products are designed and manufactured under very strict quality control. Giro products are warranted to be free of defects in material and workmanship for 1 (one) year from date of purchase by the consumer. Giro will have no obligation if the customer cannot show proof of purchase. Warranty will not be granted unless the part is properly installed and maintained. Giro will not be liable for any consequential and incidental damages, including labor, or non-Giro products. Please visit our website Ciro3d.com for our complete warranty policy.

CIRO3D.COM