

10.6-inch high-definition display for rich color graphics

Powerful processor for smooth animations and video playback

Glass display surface offers enhanced clarity and strength

Bonded glare-free LCD screen for superior visibility in sunlight



## LARGE, FULL-COLOR DISPLAY BRINGS ENHANCED USER EXPERIENCE TO RUGGED APPLICATIONS

The PowerView 1100 is a full-color configurable display that integrates vital engine, transmission and diagnostic information into an easy-to-read operator interface. This large 10.6-inch high-definition display features expansive storage and a high-speed processor to boot quickly and seamlessly showcase graphics, transitions and videos.

The display's bonded LCD can easily be viewed in full sunlight, and its available glove-friendly touchscreen and rugged design make it a perfect solution for all types of environments and applications.

The PV1100 is available in portrait or landscape options.

### BUILT FOR POWERVISION

PowerVision Configuration Studio® software lets programmers design stunning user interfaces, create intelligent applications with scripting and prototype quickly with a vast library of standard engine parameters.




**IP  
67**

**Macquarrie**

## POWerview® 1100

### DIMENSIONS

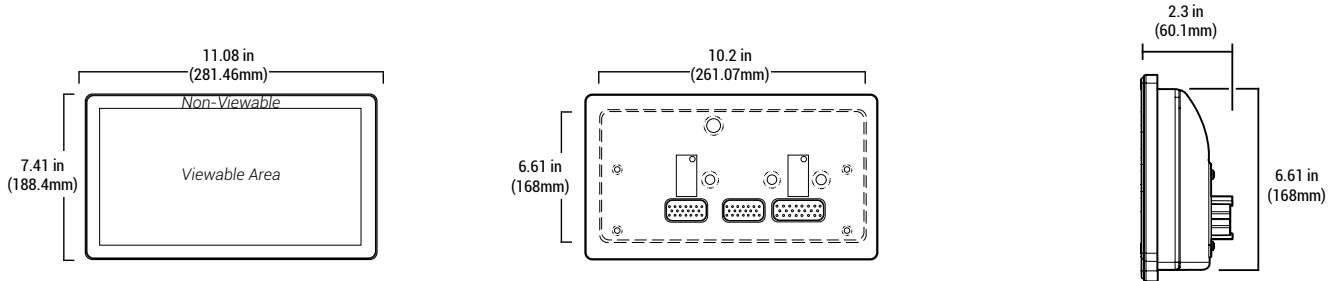

### PRODUCT SPECIFICATIONS

COMPUTING		COMMUNICATION	
<b>PROCESSOR</b>	Renesas® R-Car M2 with Arm® Cortex®-A15 dual-core processor @ 1.5 GHz (32-bit)	<b>CAN</b>	(2) CAN 2.0B according to ISO 11898-2, J1939 and proprietary messaging
<b>OPERATING SYSTEM</b>	QNX® Realtime Operating System	<b>SERIAL</b>	RS-485 serial (Modbus: master or slave)
<b>STORAGE</b>	8 GB flash memory	<b>USB</b>	USB 2.0 full speed host
<b>RAM</b>	512 MB DDR3-SDRAM	<b>ETHERNET</b>	1 X Ethernet 10/100 Base-T (optional)
<b>GRAPHICS</b>	Renesas graphics processor	<b>WI-FI</b>	802.11 b/g radio (optional)
DISPLAY		<b>BLUETOOTH</b>	Fully integrated Bluetooth 2.1, class 1 (optional)
<b>SCREEN SIZE</b>	10.6 inches (231.36 mm × 138.82 mm)	ELECTRICAL	
<b>TYPE</b>	LVDS TFT LCD with LED backlight, 24-bit color	<b>OPERATING VOLTAGE</b>	6 – 36 VDC, reverse polarity protected
<b>RESOLUTION</b>	1280 x 768	<b>INPUTS</b>	(3) Analog 0 – 5 VDC, 4-20 mA, resistive, 10-bit resolution (5) Discrete digital, active-high (1) Frequency in (2Hz – 10kHz) 5V pk-pk min, 49V pk-pk max
<b>CONTRAST RATIO</b>	Typ. 1000:1	<b>OUTPUTS</b>	(1) 500 mA switched low-side (1) Frequency output (2Hz – 3KHz)
<b>BRIGHTNESS</b>	1000 cd/m <sup>2</sup>	ENVIRONMENTAL	
<b>SURFACE</b>	Anti-glare	<b>OPERATING TEMPERATURE</b>	-40°C to +70°C (-40°F to +158°F)
<b>TOUCH PANEL</b>	Projected capacitive (PCAP) with glove touch	<b>STORAGE TEMPERATURE</b>	-40°C to +85°C (-40°F to +185°F)
HARDWARE		<b>PROTECTION</b>	IP66 and IP67, front and back, for outdoor use
<b>REAL TIME CLOCK</b>	Available with battery backup	<b>VIBRATION</b>	3.9 Grms (10–350Hz), 3 axes (ISO 15003)
<b>CONNECTORS</b>	(2) AMPSEAL 23 pin (main) (1) AMPSEAL 35 pin (optional) (1) M12 5 pin [Ethernet] (optional) (1) USB pigtail (1) Radio antenna jack (optional)	<b>SHOCK</b>	±50G in 3 axes
<b>VIDEO INPUTS</b>	(3) NTSC/PAL (single channel viewable)	<b>EMC/EMI</b>	SAE J1113, ISO 13766, CE per 2014/30/EU

FOR MANUALS, SUPPORT DOCUMENTS, AND WIRING DIAGRAMS PLEASE VISIT:

[www.macquarrie.com.au/collections/powerview-displays](http://www.macquarrie.com.au/collections/powerview-displays)