F18



_Technical data		2 GROUP	3 GROUP
voltage	٧	220-240 1N 50/60Hz or 380-415 3N 50/60Hz	
required amperage	A	25	32
power input	kW	5.4	6.1
steam boiler capacity	lt	8.6	14
steam boiler element	kW	3.8	4.5
pump power	kW	0.15	0.15
coffee boiler capacity	It (T)	1 (2x 500ml boilers)	1.5 (3x 500ml boilers)
coffee boiler element	kW (T)	1	1.5
cup-warmer power	kW	0.20	0.25
net weight	kg	97	120



Features



HIGH PERFORMANCE EXTERNAL VOLUMETRIC PUMP

Pressure stability with prolonged and consistent use of more than one group head



PROGRAMMABLE ELECTRONIC PRE-INFUSION

3-bar soft preinfusion allows independent control of time and flow across all programmable buttons.



ENERGY SAVING SYSTEM

Insulation and smart energy management to save up more than 20% of energy.



EASY SERVICE

Fast access to the internal parts, for quick and easy technical service.



GROUP FLUSHING

With a push of a button, a small dose of water is dispensed to clean the group head.



OPERATIONAL ALARM MANAGEMENT

Dedicated menu for malfunctions and alarm records.



PROGRAMMABLE CUP WARMER

Allows the cups to be kept at optimal temperature, even in different climates.



STATIC RELAY BOILER TEMPERATURE

Allows the machine to regulate the boiler temperature using a PID algorithm.



HIGH PERFORMANCE FLOWMETERS

For an accurate and precise coffee dose in the cup.



AUTOMATIC CLEANING CYCLE

Process for coffee groups cleaning



LED LIGHTING OF THE WORK AREA

Allows efficient working in any condition of environmental lighting.



STAINLESS STEEL COFFEE BOILERS

Stainless steel coffee boilers guarantees excellent stability, thermal precision, and resistance to oxidation / limescale.



COMPETITION FILTERS

Exclusive Sanremo design, with shape and volume designed to capture the best coffee aromas and fragrances.



AUTO ON, AUTO OFF AND DAY-OFF FUNCTION

Programmable on-off timer for each day and/or daily timetables.



MIXED INFUSION HOT WATER FOR

Immediate mixing of cold / hot water that allows for easy temperature adjustment.



AISI 316L STAINLESS STEEL "COOL TOUCH" STEAM WAND


Anti-burning feature even in conditions of prolonged use, fitted with "Latte Art" high-performance steam terminals.




F18



_Versions and Dimensions

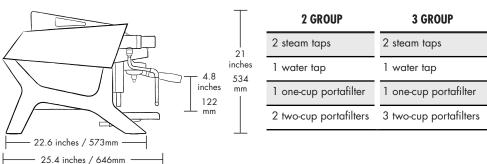

2 GROUP 3 GROUP

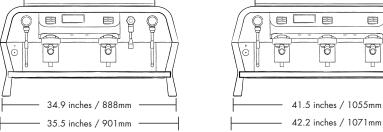

6

_Colours








All images are subject to illustrative purpose. The manufacturer reserves the right to modify without prior notice the technical characteristics indicated above.

Control Panel

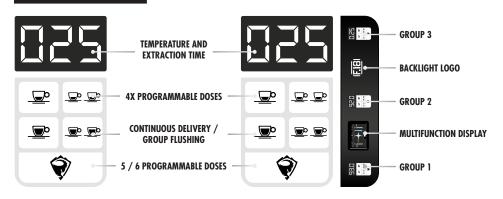

MULTI-FUNCTION TOUCH DISPLAY



CONTACT US

info@sanremomachines.com.au sanremomachines.com.au

