

# YOU

# YOU

MADE FOR YOU BY SAHREMO

**CUSTOMISABLE PRESETS**  
Icon of a notepad and pencil.

**USER-FRIENDLY**  
Intuitive touch screen display  
Icon of a hand touching a screen.

**FRONT LEVER (PADDLE)**  
Electronically managed to create and modify profiles

**ENERGY SAVING SYSTEM**  
Component insulation and smart electronics for maximum energy efficiency  
Icon of a green leaf.



**MULTI-BOILER**  
The boilers for both the coffee and the auxiliary services are made from AISI 316 stainless steel, and are fully insulated

**CONNECTIVITY**  
USB and Wifi  
Icon of a Wi-Fi signal and a USB symbol.

**FULL CONFIGURATION**  
Equipped with tank (2.5L) and water mains connection

**VOLUMETRIC PUMP**  
70 litre 24V  
Excellent stability during pressure/flow profiling

## Versions

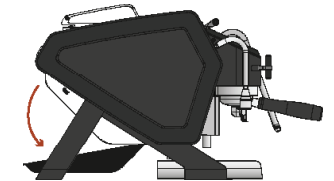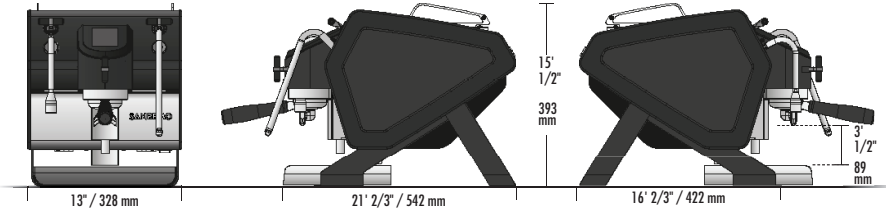

CE

## Characteristics

	<b>MIXED INFUSION HOT WATER FOR TEA AND HERBAL TEAS</b> Immediate mixing of cold / hot water for a better chemical and organoleptic quality		<b>LED LIGHTING OF THE WORK AREA</b> Allows efficient working in any condition of environmental lighting		<b>ENERGY SAVING SYSTEM</b> Component insulation and smart electronics for maximum energy efficiency
	<b>AUTO-ON, AUTO-OFF AND DAY-OFF FUNCTION</b> Programmable ON-OFF/ON-ECO timer for each day and/or daily timetables		<b>TEMPCONTROL</b> For a very-high thermal stability ( $\pm 0.2$ °C)		<b>GROUP FLUSHING</b> With a simple pressure of the button a small quantity of water is dispensed to allow the group to be always clean
	<b>STATIC RELAY BOILER TEMPERATURE</b> Allows to regulate the temperature as accurately as possible		<b>EASY SERVICE</b> Fast access to the internal parts for quick and easy technical service		<b>AUTOMATIC CLEANING CYCLE</b> Process for coffee group cleaning
	<b>STAINLESS STEEL COFFEE BOILER</b> Guarantees excellent stability and thermal precision, associated with resistance to oxidation and limestone		<b>VOLUMETRIC PUMP</b> A new generation rated 70 L/h for pressure and flow profiling		

## Technical data

voltage/max input boiler	V	120V 50-60 Hz / 1.65 kW
coffee boiler's resistor power	W	500
steam boiler capacity	lt	1
coffee boiler capacity	l	0.5
net weight	lb / kg	70.5 / 32
gross weight	lb / kg	79 / 36

## Colours

	Black: matteglossy (frames)	RAL 9005
	White: matteglossy (frames) legs and side	RAL 9003 RAL 8019
	Custom: Side panels in leather or wood Knob lever and wooden paddle lever	

Custom kits in leather and wood, pre order only

## CONTACT US

info@sanremomachines.com.au  
sanremomachines.com.au

## Customisable Presets

Extraction profiles customisable and savable:


- 6 standard profiles with optimal parameters presets
- 12 completely customisable profiles in all 3 extraction phases, with a capacity to disable pre-infusion and post-infusion
- set manual profiles from the Paddle



## Electronic Paddle

Manually create your profiles in both extraction modes.

Configure the Paddle (right/left) based on your gestures.



# YOU




MADE FOR YOU BY **SANREMO**



"ON THE FLY" function to correct the flow/pressure parameters in real time during your extraction process.

## Extraction Mode

Set your extraction profiles in Pressure or Flow mode. (\*)

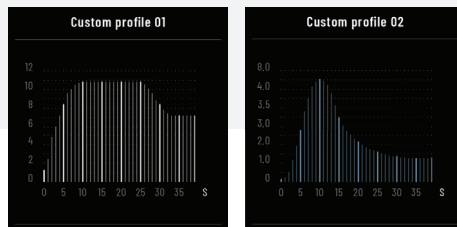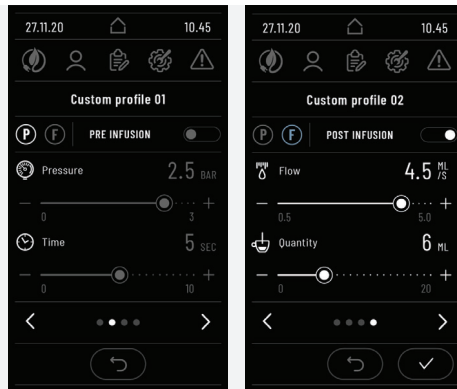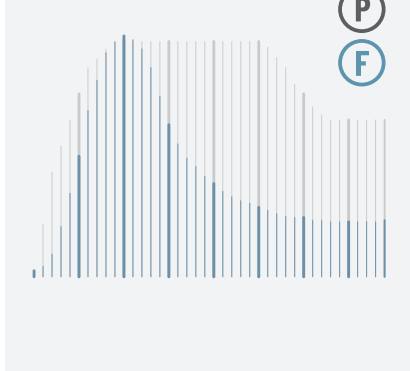

## Energy Efficiency



Setting:

- **Automatic:** allows the user to program timeslots up to 6 daily time frames
- **Manual:** allows the user to turn the machine or the individual boilers on and off manually

Two programmable modes:

- **Stand-by:** low power consumption condition, compliant with the ErP Directive (2009/125/EC)
- **Eco:** keeps the machine on, but at a reduced temperature for quick start-up

For both, the user can enable the Energy Saving function, which automatically turns the machine off after the set time.

