



**VD INSIDE SWING 8240  
VAULT DOOR ELEVATION VIEWED FROM OUTSIDE**

DOOR ASSEMBLY = 32 1/2" x 78"  
29 3/4" x 75 1/8" OPENING BETWEEN FACE FRAME JAMBS

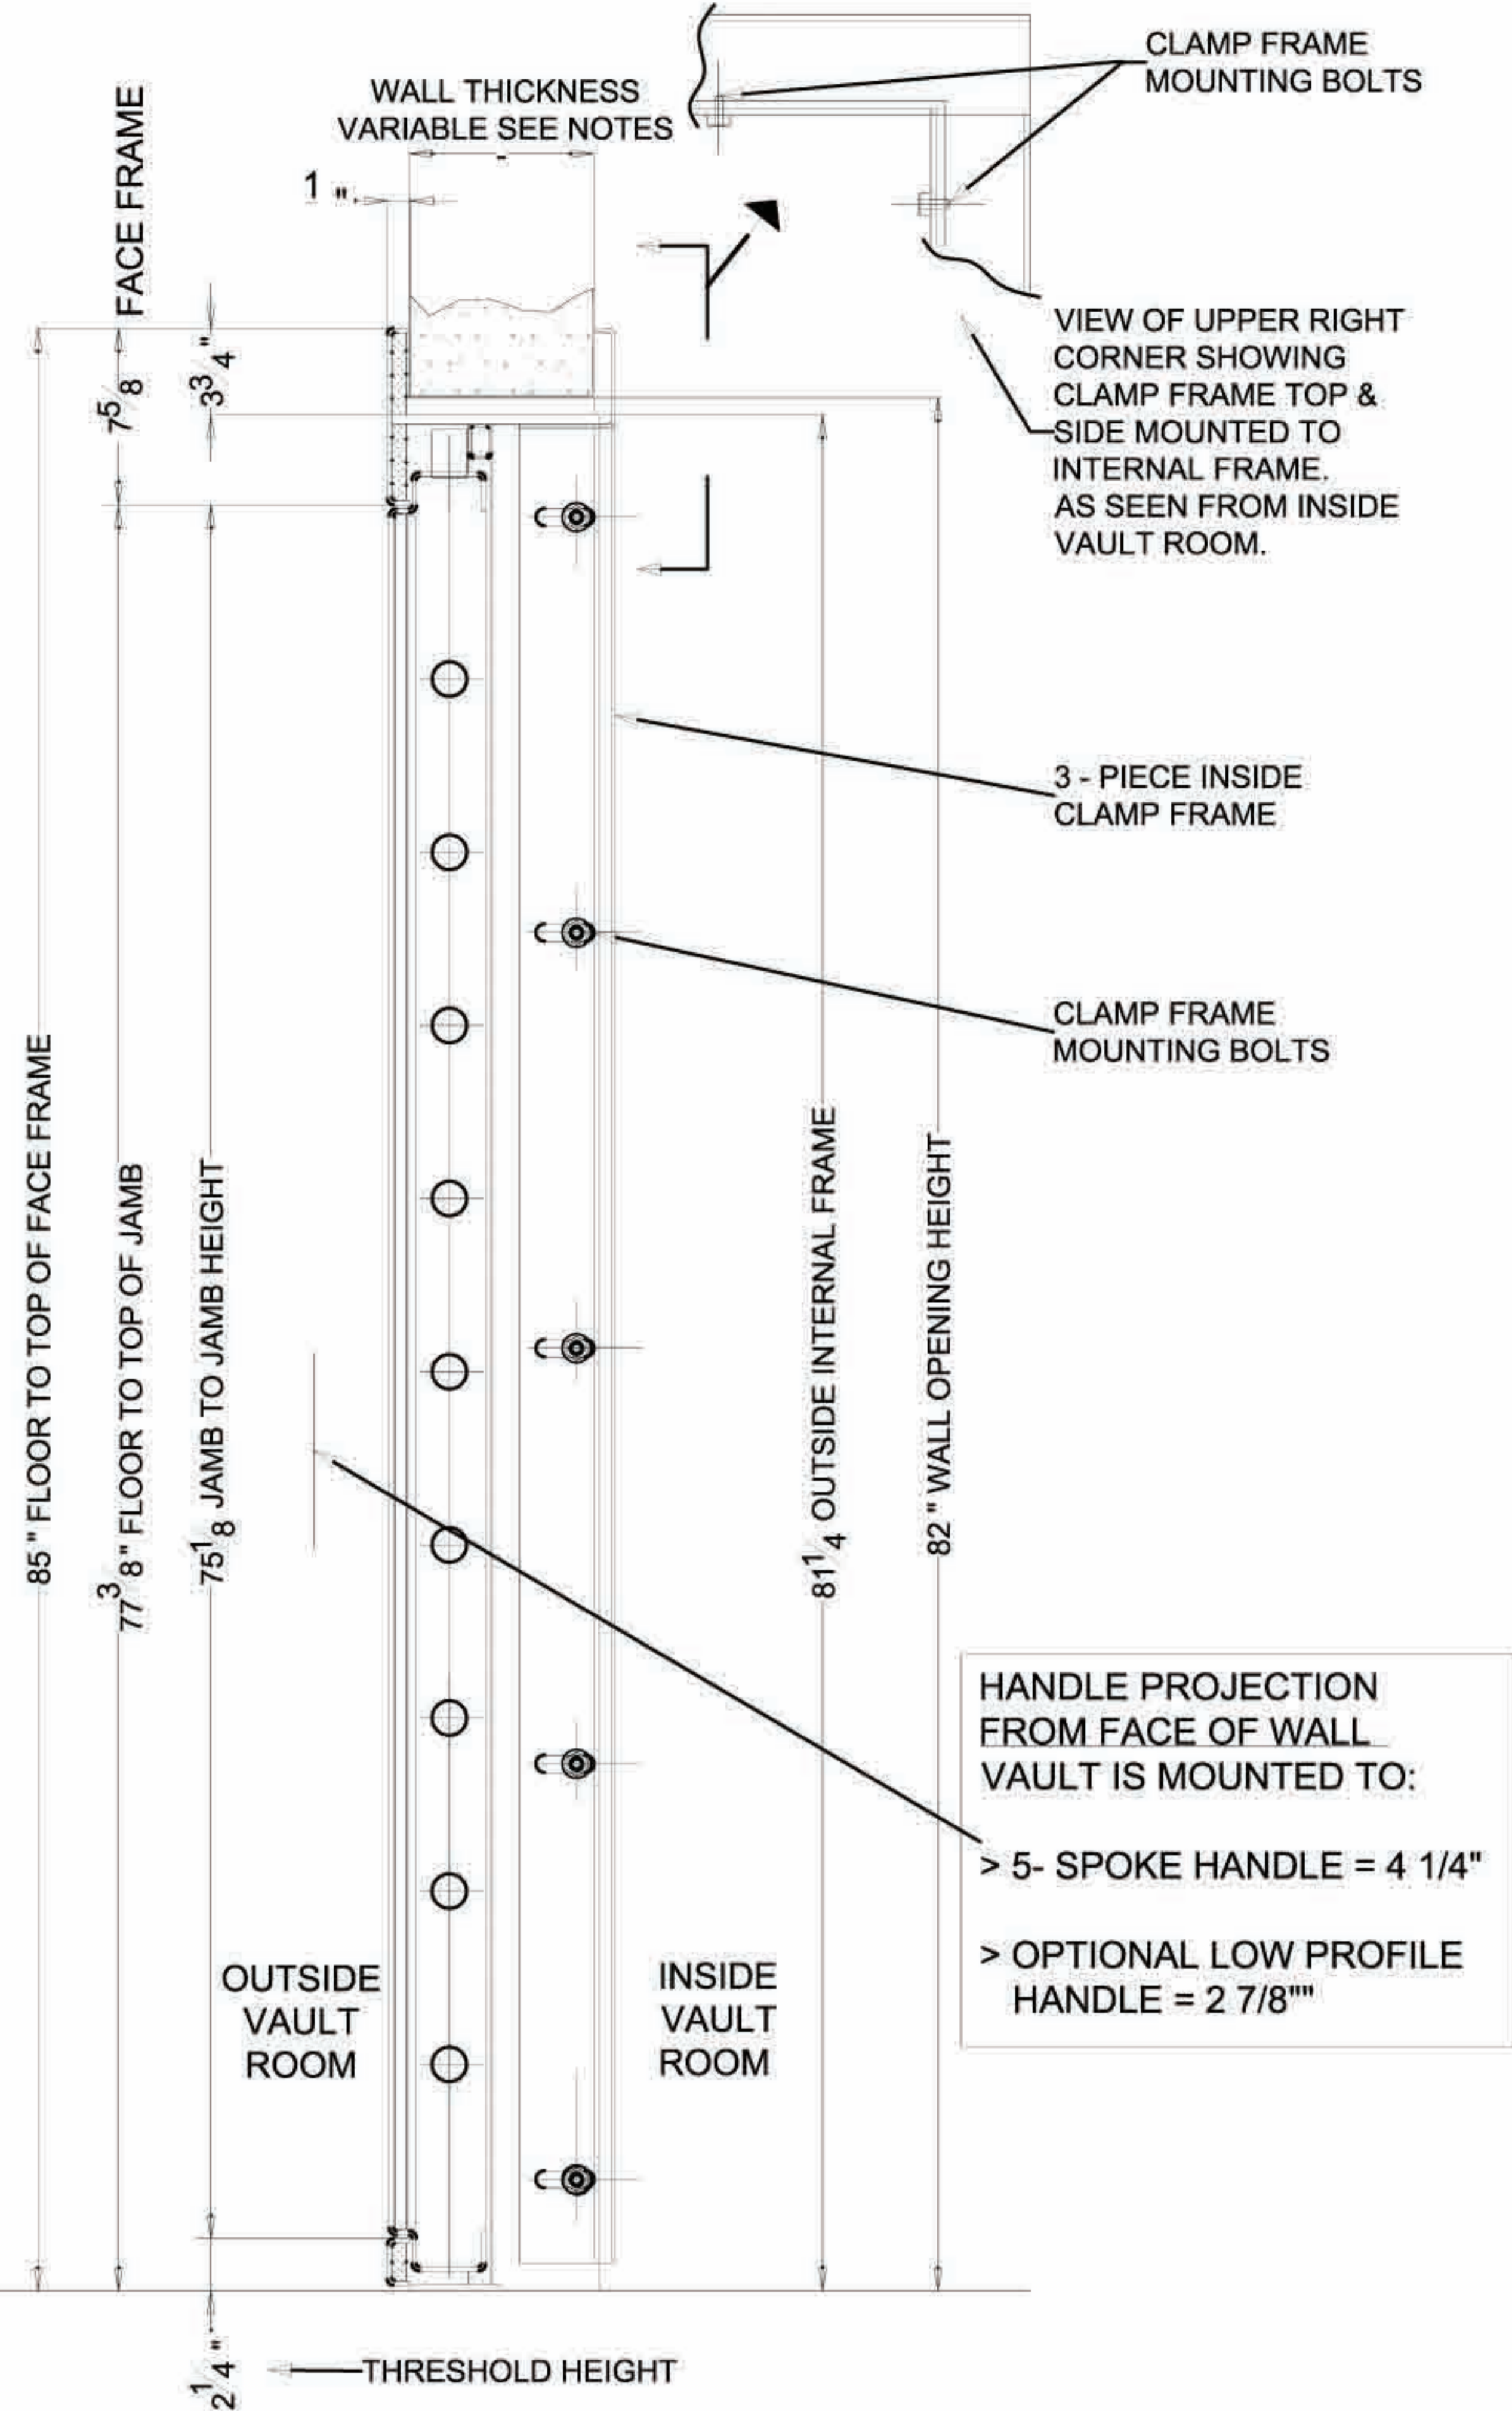

**SECTIONAL SIDE VIEW OF FRAME**

HANDLE PROJECTION FROM FACE OF WALL VAULT IS MOUNTED TO:  
 > 5- SPOKE HANDLE = 4 1/4"  
 > OPTIONAL LOW PROFILE HANDLE = 2 7/8"

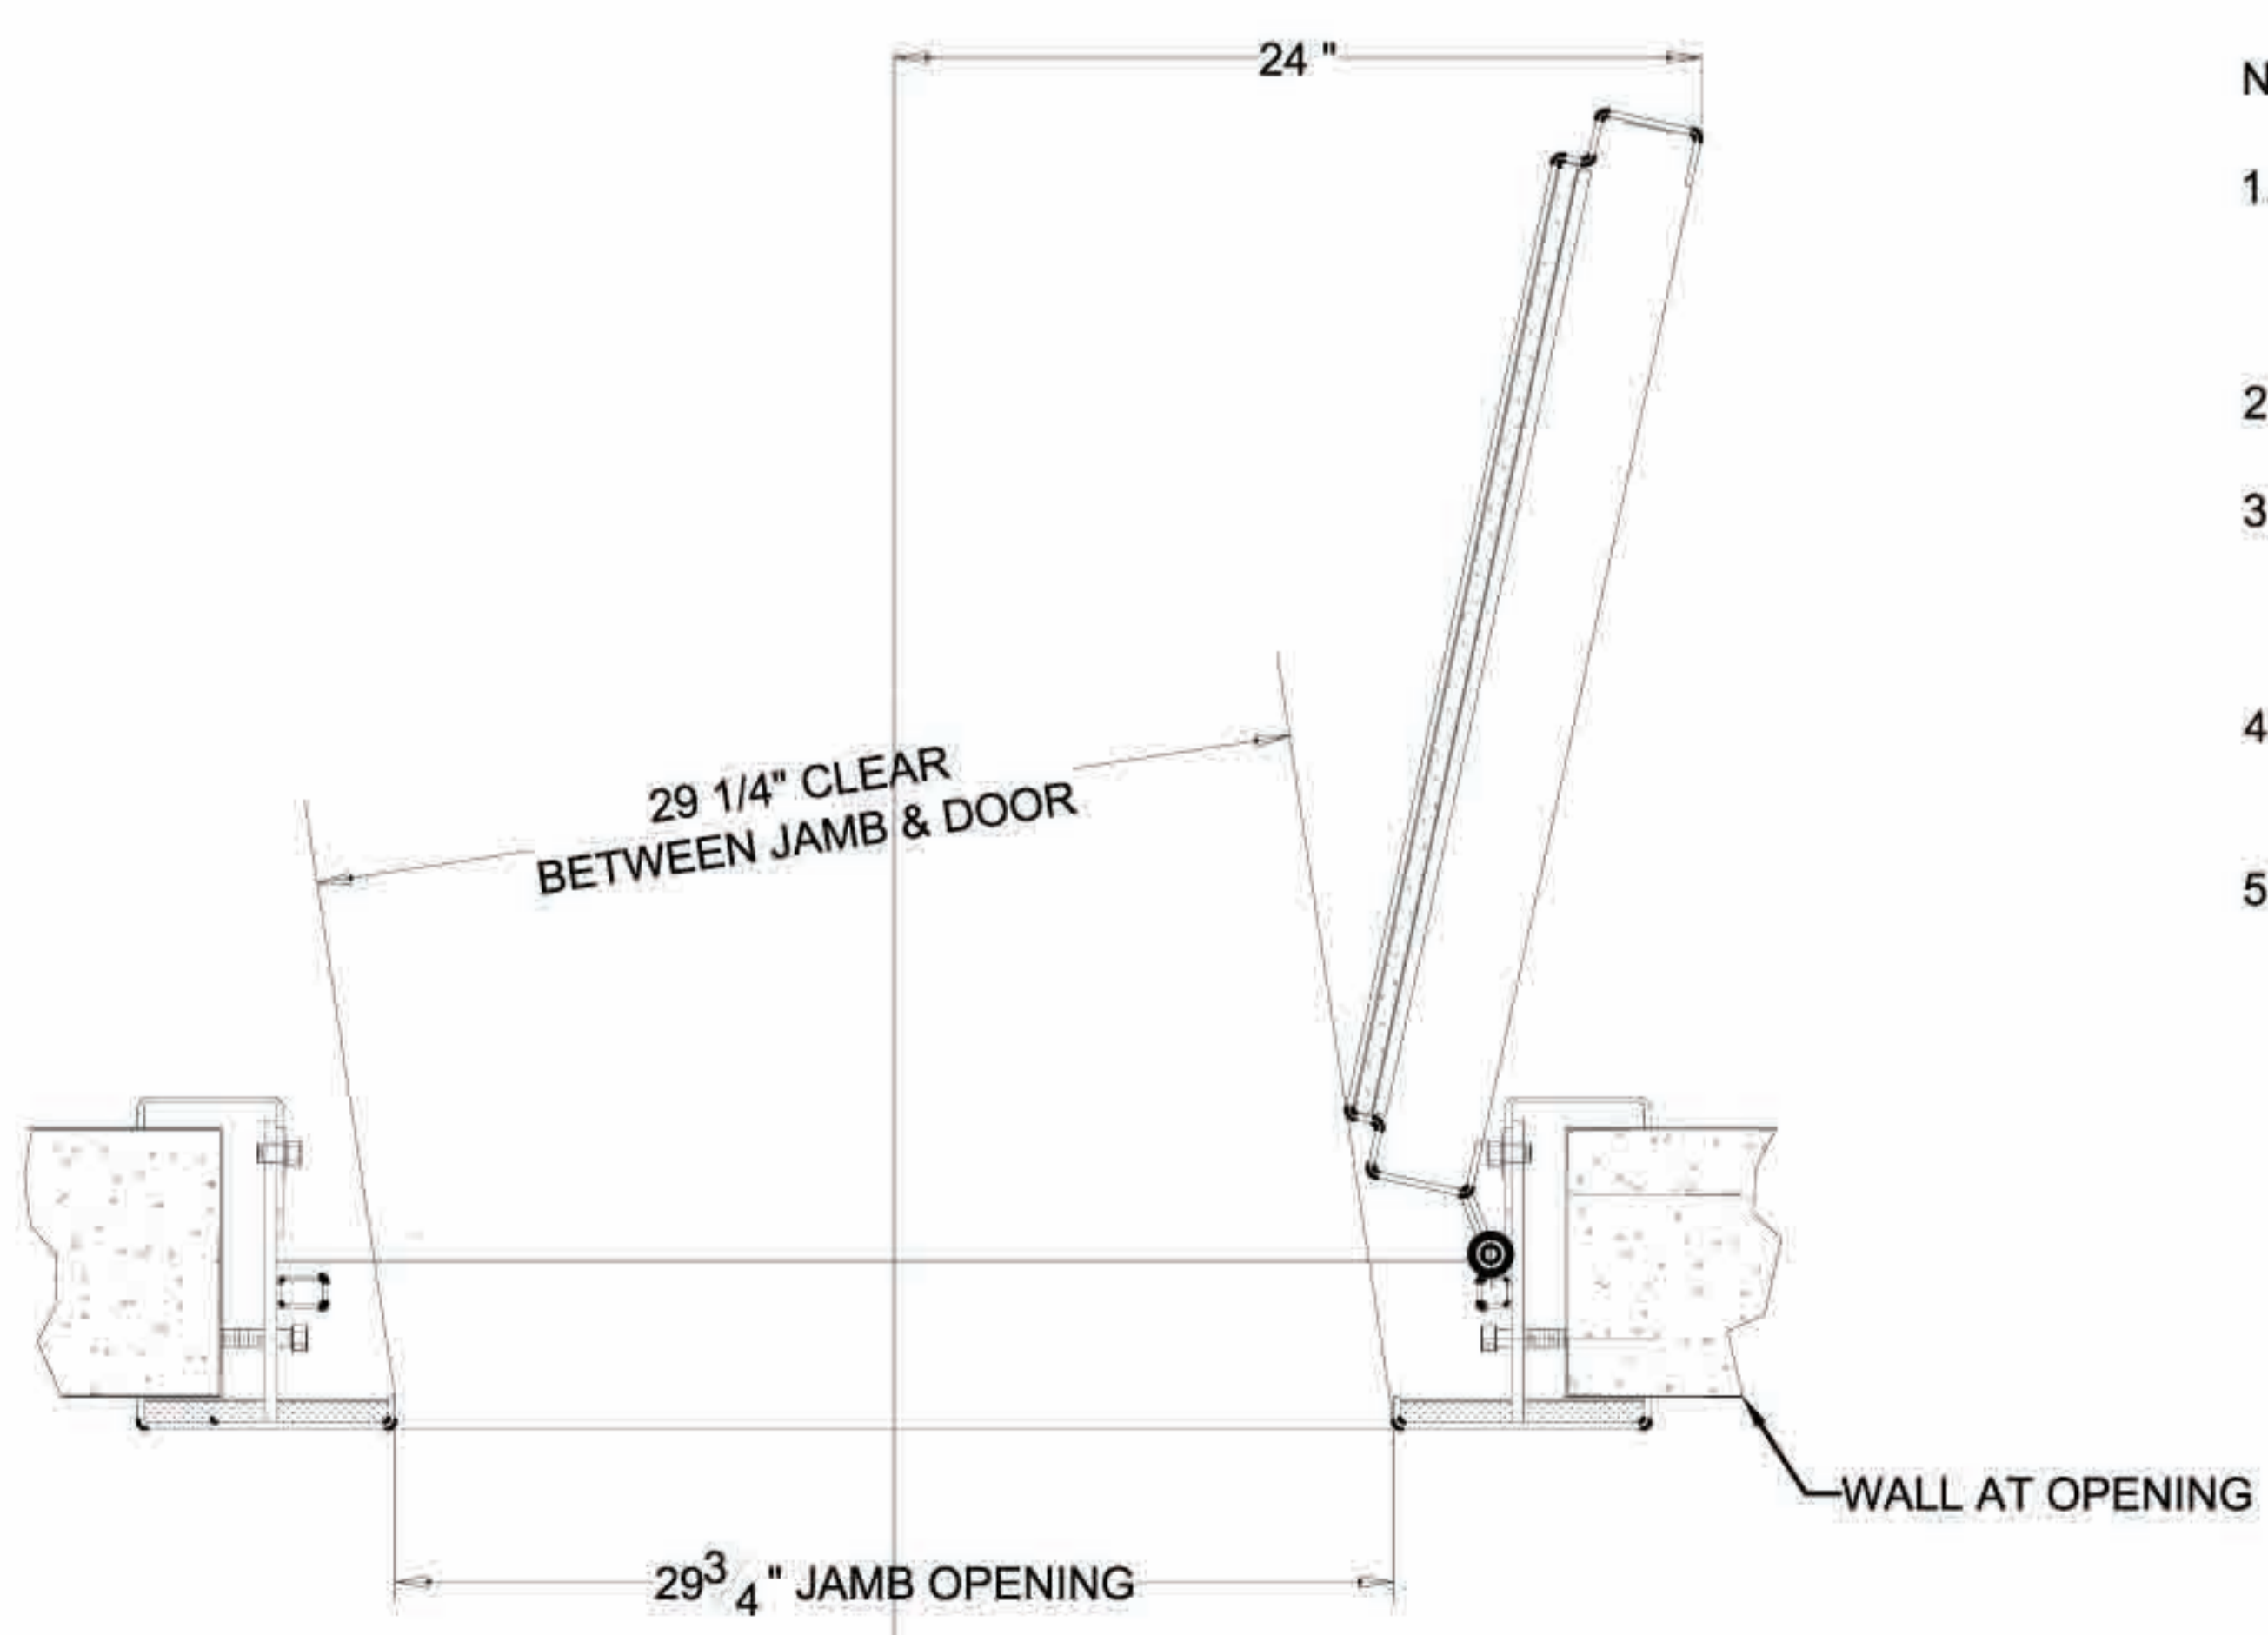

PLAN VIEW IN OPENED POSITION WITH CLEARANCE DIMENSIONS NOTED

**NOTES:**

1. DOOR AND FRAME IS ONE UNIT. CLAMP FRAME PARTS ARE SEPARATE.  
VD INSWING 8240: APPROX. xxx # NET / 1308 # WITH PACKAGING
2. INSTALL IN PRE-FORMED OPENING PER INSTALLATION INSTRUCTIONS.
3. WHEN ORDERING, SPECIFY YOUR EXACT WALL THICKNESS AND ROUGH OPENING DIMENSIONS TO ASSURE PROPER FIT.  
WALL THICKNESS STANDARD RANGE = 4 1/2" THROUGH 16 1/2".
4. CUSTOM SIZES AVAILABLE FOR OTHER OPENING DIMENSIONS CALL FOR QUOTES.
5. DIMENSIONS SUBJECT TO CHANGE. CALL FOR CURRENT SPECIFICATIONS BEFORE ORDERING.

**ROUGH OPENING IN WALL  
82" x 40"**  
**ROUGH OPENING TOLERANCES  
HEIGHT: 81 3/4" MIN / 83" MAX  
WIDTH: 38 1/2" MIN / 41" MAX**