



# The New Quintix®. Convenient Weighing.





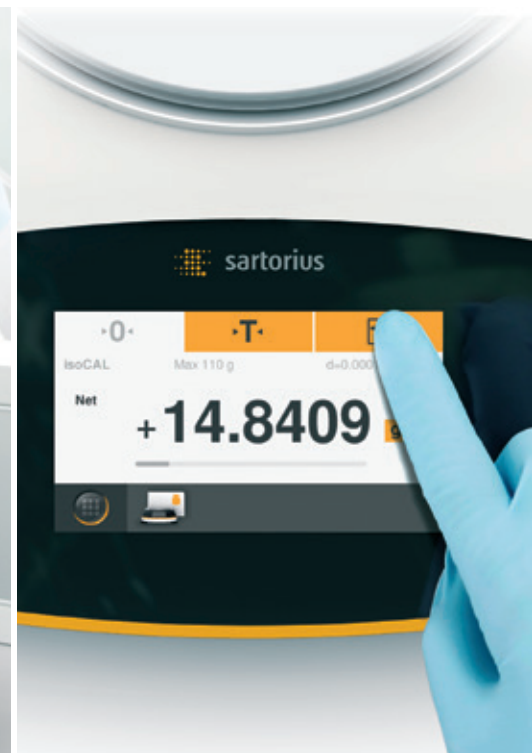

“ We found it really simple to use  
the new Quintix<sup>®</sup> right away.  
I don't know of any other balance  
that is this easy to  
operate intuitively. ”

Make Your routine lab work easy with  
our revolutionary user interface

The Sartorius Quintix<sup>®</sup> sets new benchmarks  
in every aspect for standard lab balances.  
A number of features make Your workflow  
much more efficient, such as fully automatic  
internal adjustment, direct data transfer,  
ergonomic style and, above all, the entirely  
new touchscreen user interface with built-in  
application programs.

“ At first, I placed my manual next to the balance for ready reference. But I soon discovered that I don't need it at all because operation of the Quintix<sup>®</sup> is absolutely intuitive.”



**Intuitive Operation without reading a manual by an award winning user interface and high resolution color touchscreen.**

Sartorius teamed up with experienced lab users to develop the user interface of the new Quintix®. Lab users' No. 1 priority was to ensure easy, intuitive operation without having to read the manual first. They did it!

The self-explanatory icons and plain-text prompts on the large touchscreen show you all the information you need to know for the procedure – no more, no less.

For example, the touch-activated print key will appear only when Quintix® has detected that a Sartorius printer is connected. The Quintix® also excels in compliance with workplace safety requirements: Even if you are wearing several pairs of lab gloves, you can still correctly use all the functions of the balance.





**Increase Efficiency with Integrated Application Programs**  
 Quintix® comes standard with convenient, built-in applications. These, along with the extensive accessories Sartorius offers, enable you to customize Quintix® to a variety of weight measurement tasks. Take specific gravity. With the built-in Density application and the Sartorius Density Kit, you can effortlessly determine the density of solids and liquids.



**Mixing**  
 Enables you to weigh in various components of a formula quickly with 100% traceability.



**Components**  
 Conveniently lets you weigh components of a formula into separate containers and retrieve the total amount weighed-in at any time.



**Statistics**  
 Saves you work when you need to know the standard deviation and other statistics on an entire group of different samples, but don't have the time to do the number-crunching yourself.



**Checkweighing**  
 Helps you zip through series of samples when you have to quickly determine whether each one is within a specific tolerance range.



**Density**  
 Takes the effort out of determining the density of a solid, irregularly-shaped object.



**Weighing**  
 In addition to this app, all Quintix® balances feature isoCAL, the fully automatic internal calibration and adjustment function engineered by Sartorius to ensure total accuracy.



**Conversion**  
 Takes care of the math when you need to convert a weight using a factor, say, to calculate the weight per unit area.



**Peak Hold**  
 Locks in the reading so you can later view the maximum force released in milliseconds when a switch is activated during an experiment, or the weight of a bulky sample that hides the display while weighing.



**Unstable Conditions**  
 Delivers rock-steady results when you have to weigh in an extremely unstable environment or measure the weight of a hyper little mouse that just won't sit still.



**Percentage**  
 Makes comparisons of samples easy when you need to determine their difference in percent from a reference standard.



**Counting**  
 Gives you the exact count when you want to know how many identical parts, such as tablets, are in a bag.

“ With the apps in Quintix<sup>®</sup>, we can now take care of exotic applications much more easily and efficiently. ”



“ I just transfer weights and other app data directly into an Excel file at a mouse click, without any additional software or bothering with tweaking this really couldn't be more convenient.”






needing  
the settings –

**Easy and Convenient Data Transfer to your PC without the need of extra software by integrated PC-direct function.**

Quintix® substantially simplifies processing data in spreadsheets. How? After connecting the USB port on Quintix® to a computer, just open the Windows® application you need. Quintix® delivers data in your choice of format, either text or numbers, enabling effortless and accurate spreadsheet calculations. No additional software or special configuration settings are needed.

This Plug & Work technology in Quintix® saves you considerable time and effort in generating fast and reliable documents.

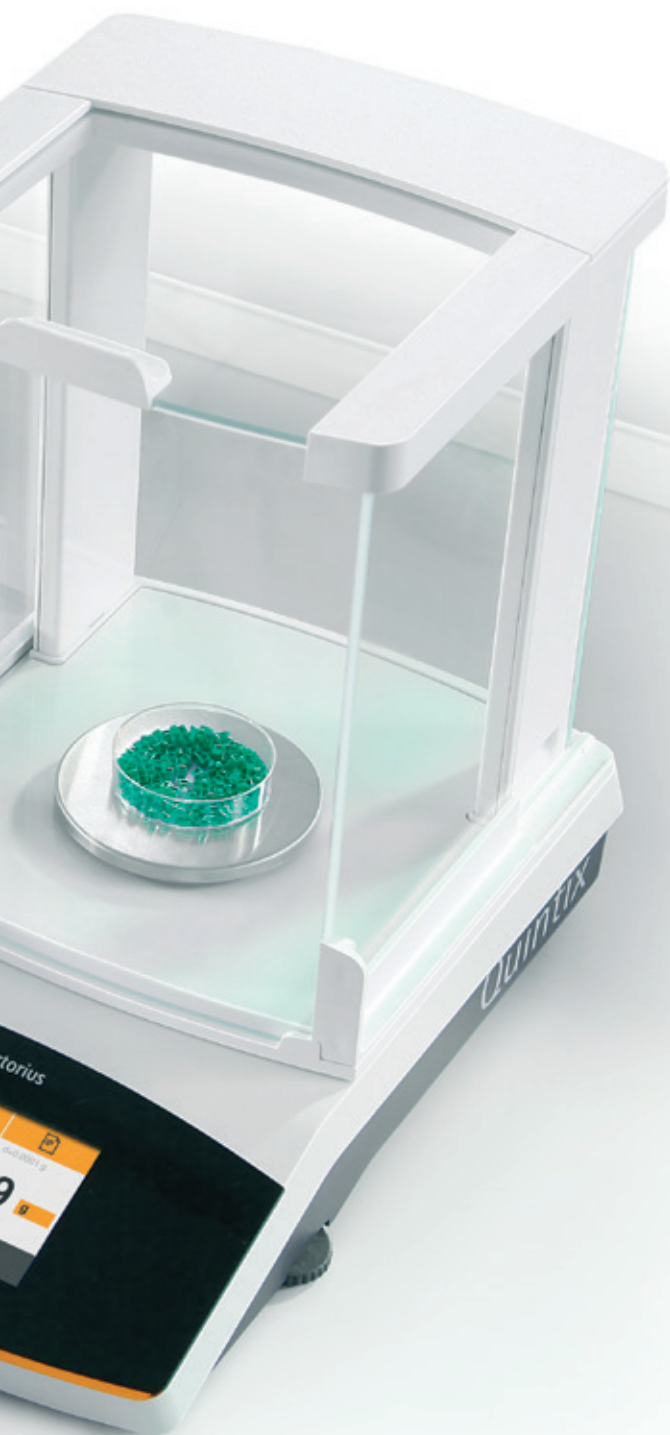

The Sartorius standard printer YDP40 is automatically detected by Quintix®. Thanks to interactive user guidance, Quintix® provides help in generating error-free printouts.



“ We use Quintix<sup>®</sup> non-stop. It's worth its weight in gold because it's a balance you can always depend on. ”



**Repeatability and linearity are the key prerequisites to obtaining accurate and traceable weighing results.**

That's why Quintix<sup>®</sup> has been subjected to extensive automated repeatability, linearity and temperature drift tests to guarantee that it meets our high metrological specifications. Inside a virtual "rigorous testing chamber", Quintix<sup>®</sup> test samples undergo more than 1,000,000 load stress tests to ensure that after years of standing up to the rigours of daily use with different weight loads, it will still deliver accurate results just like it did on day one.

Quintix<sup>®</sup> is crafted in Germany with high-grade components and materials. For example, the weigh cells are mounted on a solid, special aluminum alloy base plate, which is extremely impervious to ambient conditions, such as temperature fluctuations and vibration.

All these tests and features add up to user benefits like the legendary reliability of the Sartorius Quintix<sup>®</sup>, a major advantage it shares with every other Sartorius balance.



Is the linearity still correct even after 1 million cycles? Absolutely! Shown here is the Quintix<sup>®</sup> undergoing an endurance test.

“ I don't have to worry about  
inaccuracy due to temperature  
fluctuations because my Quintix<sup>®</sup>  
eliminates this risk.”




**Highest Accuracy and Convenience with fully automatic internal temperature- and time-controlled adjustment feature (isoCAL).**

Temperature fluctuations have an influence on the accuracy of your weighing results.

This is why every Quintix® comes equipped with the internal adjustment function isoCAL that ensures consistently accurate results.

Each time isoCAL is performed, Quintix® records all data on this procedure so it can be traced for your quality assurance.

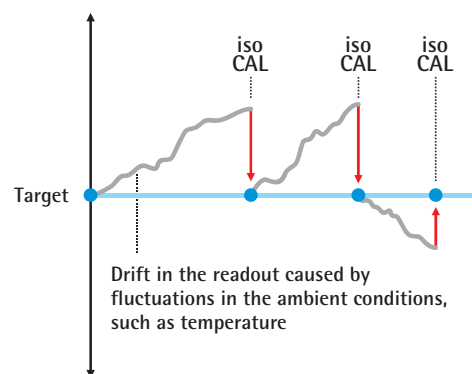

# Quintix<sup>®</sup> Technical Specifications

Model		224	124	64	613	513	313
Design		1	1	1	2	2	2
Weighing capacity	g	220	120	60	610	510	310
Readability	mg	0.1	0.1	0.1	1	1	1
Repeatability	mg	0.1	0.1	0.1	1	1	1
Linearity	mg	0.2	0.2	0.2	2	2	2
Typical response time	s	2	2	2	1	1	1
Pan size diameter	mm	90	90	90	120	120	120
	inches	3.5	3.5	3.5	4.7	4.7	4.7
Height of the weighing chamber	mm	209	209	209	209	209	209
Net weight	kg	4.9	4.9	4.9	4.9	4.9	4.9
	lb	10.8	10.8	10.8	10.8	10.8	10.8
Dimensions D × W × H	mm	360 × 216 × 320 (designs 1+2)					
	inches	14.1 × 8.5 × 12.6 (designs 1+2)					
Versions verified as legal for trade	All models can be obtained with a type-approval certificate for use						
Draft shield for analytical balances (Designs 1+2)	<ul style="list-style-type: none"> <li>- Analytical draft shield chamber with doors that glide open smoothly</li> <li>- Interior chamber featuring spill-proof design; exceptionally easy to clean</li> <li>- All panes can be individually cleaned or exchanged</li> </ul>						
Housing	Chemically resistant finish of the housing for the easiest cleaning						
Weigh cell	<ul style="list-style-type: none"> <li>- Sartorius weigh cell</li> <li>- Mounted on a heavy-duty die-cast plate made of a special aluminum alloy</li> <li>- Stable and repeatable weighing results guaranteed, along with high accuracy</li> </ul>						
Calibration	isoCAL – fully automatic, temperature- and time-controlled internal calibration						
Interface	mini USB <ul style="list-style-type: none"> <li>- Automatic recognition of Sartorius printer models YDP30 and YDP300</li> <li>- Direct data transfer to Microsoft<sup>®</sup> application programs without additional software</li> <li>- Programmable interval for data output</li> <li>- Choice of SBI, xBPI, table format or text format data transfer protocols</li> </ul>						
Supervisor lock	Menu lock for protection against unintentional changes						
In-use cover	Provides added protection against dirt and scratches; supplied standard						
Anti-theft device	Kensington lock and lug for attaching a chain or a cable						
Built-in application programs	Special lab applications such as Mixing, Components, Statistics and Percent						
Below-balance weighing	Standard, built-in feature						
Accessories	See Quintix <sup>®</sup> list of accessories						
Development and manufacture	Developed and made in Germany						



Design 1



Design 2



Design 3

213	6102	5102	3102	2102	1102	612	412	6101	5101	2101	6100	5100
2	3	3	3	3	3	3	3	3	3	3	3	3
210	6,100	5,100	3,100	2,100	1,100	610	410	6,100	5,100	2,100	6,100	5,100
1	10	10	10	10	10	10	10	100	100	100	1000	1000
1	10	10	10	10	10	10	10	100	100	100	500	500
2	20	20	20	30	30	30	30	300	300	300	1000	1000
1	1	1	1	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
120	180	180	180	180	180	180	180	180	180	180	180	180
4.7	7	7	7	7	7	7	7	7	7	7	7	7
209	-	-	-	-	-	-	-	-	-	-	-	-
4.9	5.2	5.2	5.2	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.7	4.7
10.8	11.5	11.5	11.5	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8	10.8

360 × 216 × 95 (design 3)  
14.1 × 8.5 × 3.75 (design 3)

in legal metrology

thly for fatigue-free weighing  
to clean

ever

num alloy  
minimum dependence on temperature  
al adjustment

YDP40  
any additional software

ocols

dard with the balance

Conversion; plus standard lab applications such as Weighing, Density, Percentage, Checkweighing, Peak Hold, Counting and Unstable Conditions

# Sales and Service Contacts

For further contacts, visit [www.sartorius.com](http://www.sartorius.com)

## Europe

### Germany

Sartorius Lab Instruments  
GmbH & Co. KG  
Weender Landstrasse 94-108  
37075 Goettingen  
Phone +49.551.308.0  
Fax +49.551.308.3289

### France & Suisse Romande

Sartorius France S.A.S.  
ZI Les Paluds  
Avenue de Jouques - CS 31090  
13781 Aubagne Cedex  
Phone +33.442.845600  
Fax +33.442.846545

### Austria

Sartorius Austria GmbH  
Franzosengraben 12  
1030 Vienna  
Phone +43.1.7965760.0  
Fax +43.1.7965760.24

### Belgium

Sartorius Belgium N.V.  
Leuvensesteenweg, 248/B  
1800 Vilvoorde  
Phone +32.2.756.06.71  
Fax +32.2.253.45.95

### Finland & Baltics

Sartorius Biohit Liquid Handling Oy  
Laippatie 1  
00880 Helsinki  
Phone +358.9.755.951  
Fax +358.9.755.95.292

### Hungary

Sartorius Hungária Kft.  
Kagyló u. 5.  
2092 Budakeszi  
Phone +3623.457.227  
Fax +3623.457.147

### Ireland

Sartorius Ireland Ltd.  
Unit 41, The Business Centre  
Stadium Business Park  
Ballycoolin Road  
Dublin 11  
Phone +353.1.8089050  
Fax +353.1.8089388

### Italy

Sartorius Italy S.r.l.  
Via dell'Antella, 76/A  
50012 Antella-Bagno a Ripoli (FI)  
Phone +39.055.63.40.41  
Fax +39.055.63.40.526

### Poland

Sartorius Poland sp.z o.o.  
ul. Wrzesinska 70  
62-025 Kostrzyn  
Phone +48.61.6473830  
Fax +48.61.6473839

### Russian Federation

LLC "Sartorius ICR"  
and LLC "Biohit"  
Uralskaya str. 4, Lit. B  
199155, Saint-Petersburg  
Phone +7.812.327.5.327  
Fax +7.812.327.5.323

### Spain & Portugal

Sartorius Spain S.A.  
Offices in Madrid:  
C/ Isabel Colbrand, 10-12, of. 70  
28050 Madrid  
Phone Spain +34.902.123.367  
Phone Portugal +351.800.855.800  
Fax Spain +34.91.358.84.85  
Fax Portugal +351.800.855.799

### Switzerland

Sartorius Mechatronics Switzerland AG  
Ringstrasse 24a  
8317 Tagelswangen (ZH)  
Phone +41.44.746.50.00  
Fax +41.44.746.50.50

### U.K.

Sartorius UK Ltd.  
Longmead Business Centre  
Blenheim Road, Epsom  
Surrey KT19 9QQ  
Phone +44.1372.737159  
Fax +44.1372.729927

## America

### USA

Sartorius Corporation  
5 Orville Drive, Suite 200  
Bohemia, NY 11716  
Phone +1.631.254.4249  
Toll-free +1.800.635.2906  
Fax +1.631.254.4253

### Argentina

Sartorius Argentina S.A.  
Int. A. Ávalos 4251  
B1605ECS Munro  
Buenos Aires  
Phone +54.11.4721.0505  
Fax +54.11.4762.2333

### Brazil

Sartorius do Brasil Ltda  
Avenida Senador Vergueiro 2962  
São Bernardo do Campo  
CEP 09600-000 - SP- Brasil  
Phone +55.11.4362.8900  
Fax +55.11.4362.8901

### Canada

Sartorius Canada Inc.  
2179 Dunwin Drive #4  
Mississauga, ON L5L 1X2  
Phone +1.905.569.7977  
Toll-Free +1.800.668.4234  
Fax +1.905.569.7021

### Mexico

Sartorius de México S.A. de C.V.  
Circuito Circunvalación Poniente  
No. 149  
Ciudad Satélite  
53100, Estado de México  
México  
Phone +52.5555.62.1102  
Fax +52.5555.62.2942

## Asia | Pacific

### Australia

Sartorius Australia Pty. Ltd.  
Unit 5, 7-11 Rodeo Drive  
Dandenong South Vic 3175  
Phone +61.3.8762.1800  
Fax +61.3.8762.1828

### China

Sartorius Scientific  
Instruments (Beijing) Co., Ltd.  
33 Yu An Road, Airport Industrial Park  
Zone B,  
Shunyi District, Beijing 101300,  
P.R.China  
Phone +86.10.8042.6300  
Fax +86.10.8042.6486

### Hong Kong

Sartorius Hong Kong Ltd.  
Unit 1012, Lu Plaza  
2 Wing Yip Street  
Kwung Tong  
Kowloon, Hong Kong  
Phone +852.2774.2678  
Fax +852.2766.3526

### India

Sartorius Weighing India Pvt. Ltd.  
#69/2-69/3, NH 48, Jakkasandra,  
Nelamangala Tq  
562 123 Bangalore, India  
Phone +91.80.4350.5250  
Fax +91.80.4350.5253

### Japan

Sartorius Stedim Japan K.K.  
4th Fl., Daiwa Shinagawa North Bldg.  
8-11, Kita-Shinagawa 1-chome  
Shinagawa-ku, Tokyo, 140-0001 Japan  
Phone +81.3.4331.4300  
Fax +81.3.4331.4301

### Malaysia

Sartorius Malaysia Sdn. Bhd  
Lot L3-E-3B, Enterprise 4  
Technology Park Malaysia  
Bukit Jalil  
57000 Kuala Lumpur, Malaysia  
Phone +60.3.8996.0622  
Fax +60.3.8996.0755

### Singapore

Sartorius Singapore Pte. Ltd  
1 Science Park Road,  
The Capricorn, #05-08A,  
Singapore Science Park II  
Singapore 117528  
Phone +65.6872.3966  
Fax +65.6778.2494

### South Korea

Sartorius Korea Ltd.  
8th Floor, Solid Space B/D,  
PanGyoYeok-Ro 220, BunDang-Gu  
SeongNam-Si, GyeongGi-Do, 463-400  
Phone +82.31.622.5700  
Fax +82.31.622.5799

### Thailand

Sartorius (Thailand) Co. Ltd.  
129 Rama 9 Road,  
Huaykwang  
Bangkok 10310  
Phone +66.2643.8361-6  
Fax +66.2643.8367



◀ [www.sartorius.com](http://www.sartorius.com)