



FS Performance Engineering
Kia Stinger Street Splitter Installation Instructions

Tools Needed:

- Flat Head Screwdriver / Clip Remover
- 10mm Wrench
- 10mm Socket
- 14mm Socket
- Ratchet Wrench
- ¼” Drill Bit
- Drill
- Scissors/Diagonal Cutters


Included in Kit:

- (1) Kia Stinger Front Street Splitter
- (13) M6-1.0 x 30mm bolts
- (13) M6 Nyloc Nuts
- (26) ¼” ID, 1” OD Fender Washers

Steps:

1.) Begin by removing your OEM skid plate. The skid plate is held on by:


- TEN Push Clips (use flat head screwdriver)
- SIX Bolts w/ 10mm Heads
- ONE Plastic Nut w/ 14mm Head

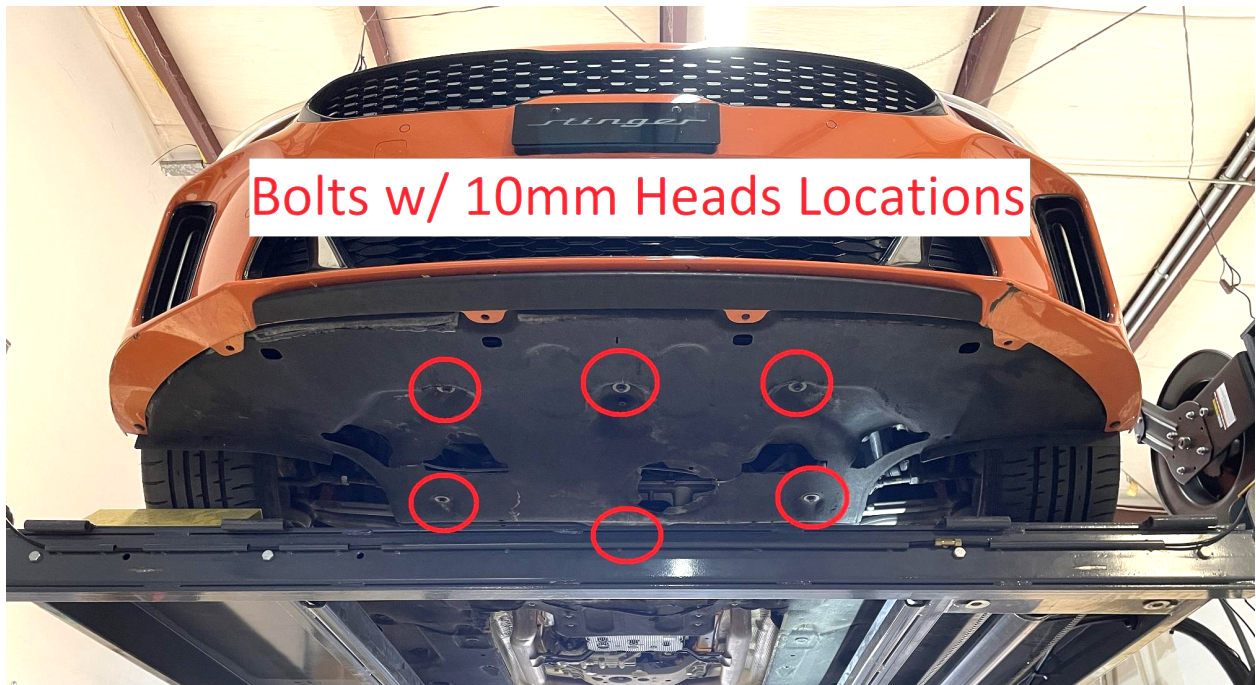



2.) Once the skid plate is removed, you can now install the splitter into the OEM holes found on either side of the bumper (1 on each side). These holes had clips in them, but did not support the skid plate. Pass the bolts through the splitter, bumper, and black trim on the interior of the bumper. Align the back edges of the splitter with the bumper fender edges and securely tighten.



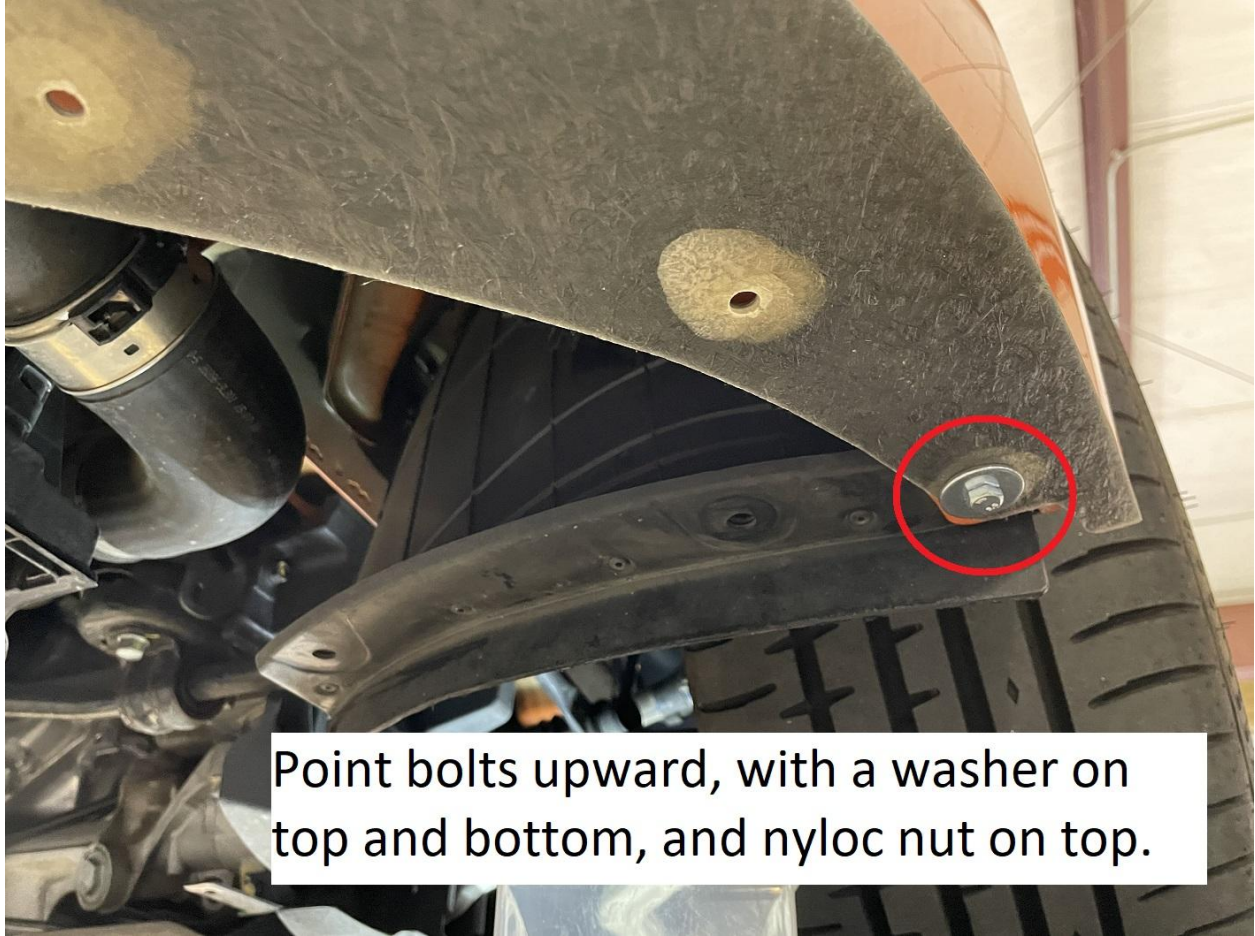

Point bolts upward, with a washer on top and bottom, and nyloc nut on top.




3.) Next, squeeze the front of the splitter and bumper together. Align the two together so the interior contours match. While holding it, drill a $\frac{1}{4}$ " hole up through the bumper. Have a friend help if necessary. Then install a bolt and nut with washers on top and bottom. (see pics)





4.) Now you can drill into the bumper through the remaining holes in the splitter, and then install the remainder of the splitter with your bolts, nuts, and washers. Assure you are putting washers on top and bottom and secure the splitter tightly.

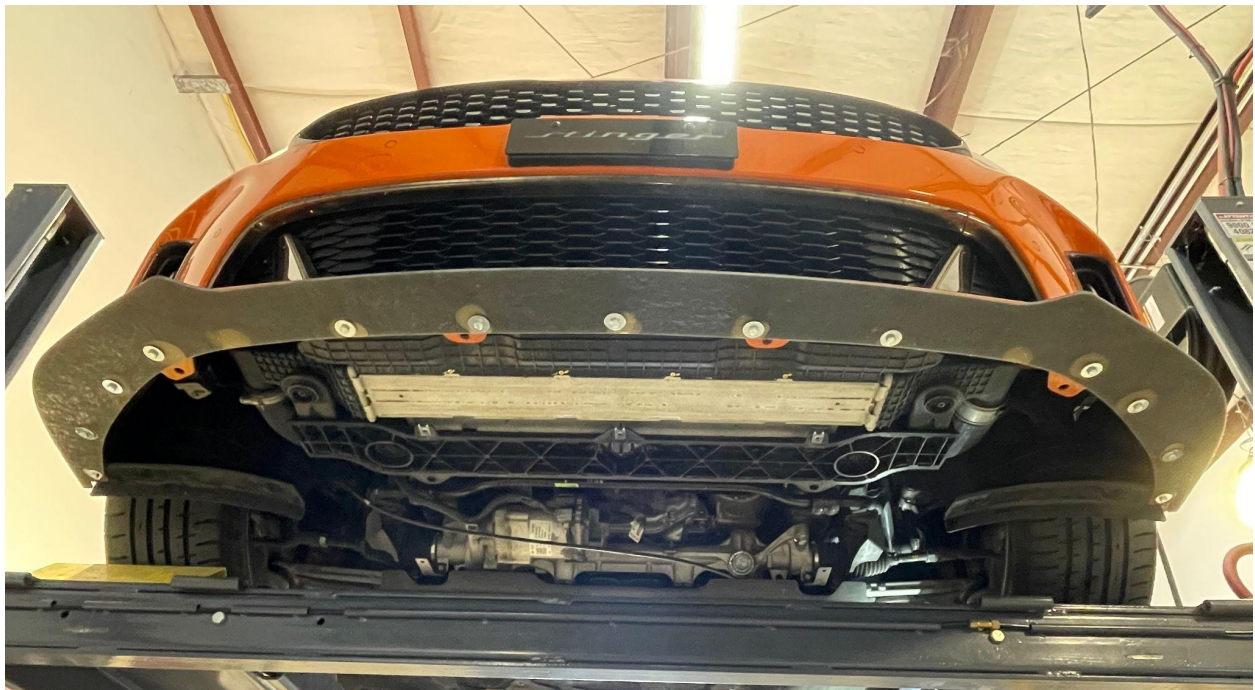



5.) Before buttoning things up, you need to identify where splitter bolts are interfering with your skid plate. We found that the center FIVE bolts will interfere. You need to “notch” out pieces in the skid plate for them. We used diagonal cutters to create v-shaped notches so the bolts don’t run into the skid plate.



6.) Once the notches are made, you can reinstall your skid plate. In the end you will have two push clips left over because we replaced them with bolts at the outer edges of the bumper.



7.) Enjoy your new Kia Stinger Street Splitter! Feel free to contact us with any questions.

EMAIL: costas@fspeinc.com

PHONE: 661-809-0954

#FSPerformanceEngineering