

NITRO INFUSER


PRO EDITION

INSTALLATION INSTRUCTIONS


Thank you for purchasing a Nitro Infuser!
Follow the instructions below to get started.

Installation videos and manuals may be found at:
www.enhancedbeveragesolutions.com/support

SINGLE INFUSER SET UP

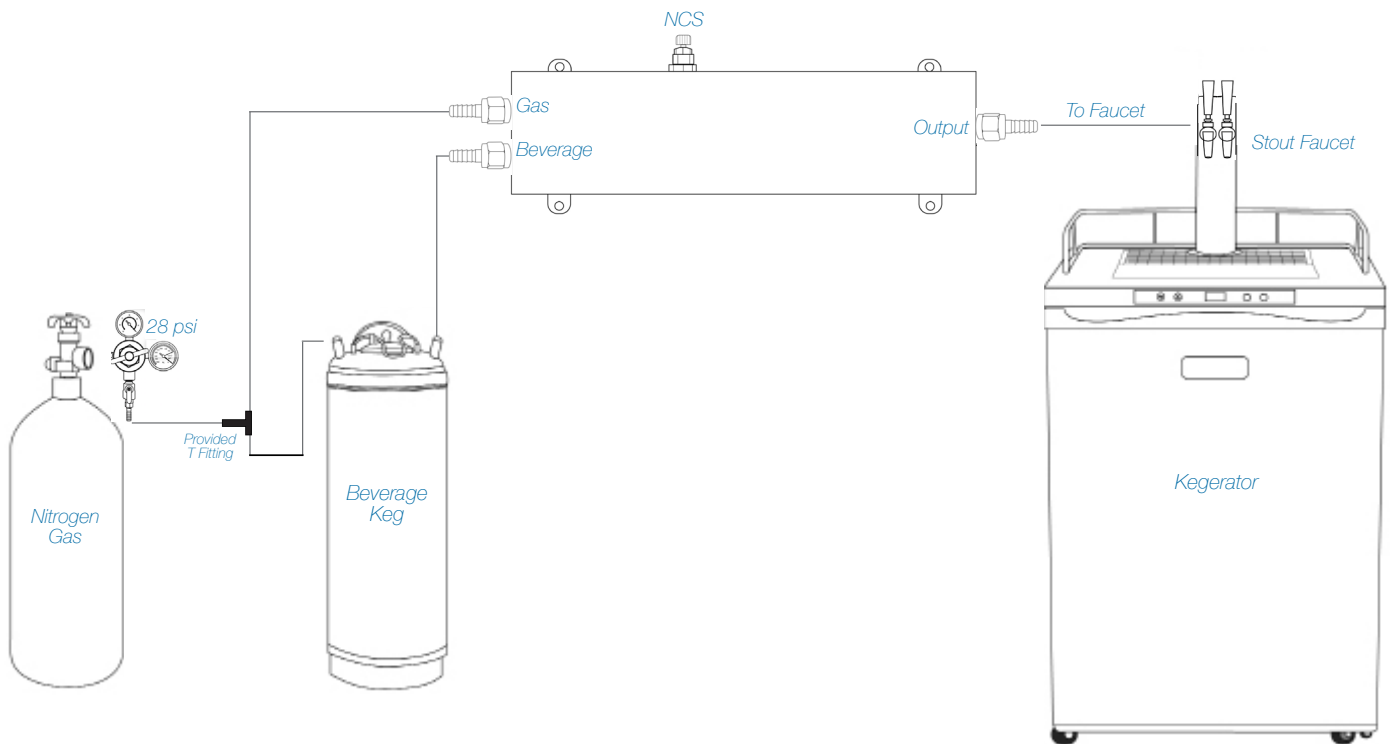

DUAL INFUSER SET UP

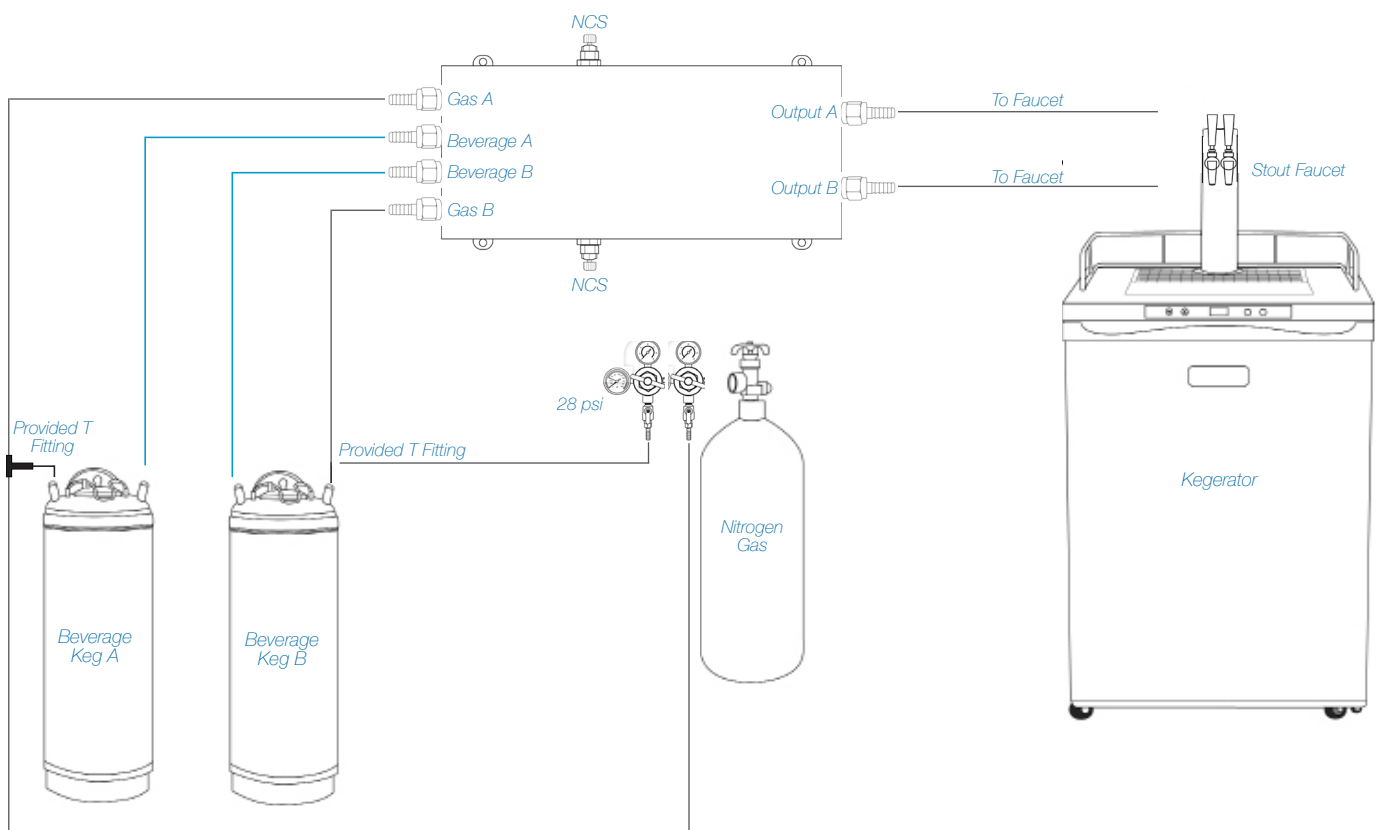

NITRO INFUSER PRO EDITION

Step 1: Preparation

If you are installing your Nitro Infuser in an existing system, the nitrogen gas must be shut off and depressurized, including the keg. Set the regulator to 0 psi. Open the tap faucet to release pressure.

If hose requires different barb size, simply remove attached fittings and secure new fittings using thread tape or bushing.

Step 2: Identify Mounting Location for Nitro Infuser

The Nitro Infuser will be mounted within the kegerator, on the beverage line from the keg to the tap faucet. Placement of your Nitro Infuser on the inside wall of the kegerator near the top is ideal. For best performance, the Output line to the faucet should be as short as possible. (If you are also installing the AfterBurner, this will be installed after the Nitro Infuser, closer to the faucet)

*Please note, infusing a beverage with nitrogen causes the liquid to freeze faster. To prevent freezing, install your infuser further from the cooling mechanism (typically found near the back of the kegerator) and turn temperature up to approximately 33.5°F or higher. Refer to your kegerator's manual to ensure there is no electricity or cooling element behind selected location.

Step 3: Nitrogen Gas System

It is important your gas system is turned off until the install is complete

- 3 a) Using the provided T fitting, connect one side to the gas line coming from your regulator. Secure with hose clamp.
- 3 b) Connect another side of the T to the "gas in" hose going to your keg. Secure with hose clamp.
- 3 c) Connect the last side of the T to a gas hose going to the Nitro Infuser barb labeled "Gas". Secure with hose clamp.

Step 4: Beverage System

- 4 a) Identify the line from the keg to the tap/faucet. Cut the line at a point that will fit the Nitro Infuser mounting location.
- 4 b) Connect the tap line from the faucet to the Nitro Infuser barb labeled "Output". Secure with hose clamp.
- 4 c) Connect the keg out line to the Nitro Infuser barb labeled "Beverage". Secure with hose clamp.

If you are installing a Nitro Infuser Dual: repeat steps 3 & 4 using the provided extra T fitting and gas hose. A dual nitrogen regulator is also recommended.

Step 5: Mount Nitro Infuser to Keg System

- 5 a) Once all connections are complete, double-check connections to assure hose clamps have been tightened.
- 5 b) Attach Nitro Infuser to kegerator in desired location from Step 2.
- 5 c) Place gas cylinder & beverage keg into kegerator. Assure all hoses have a clear path and are not kinked. Assure kegerator system door is able to close properly.

Step 6: Pressurizing System

- 6 a) Keep tap faucet in the closed position.
- 6 b) Turn the nitrogen gas to a full open position.
- 6 c) Adjust gas regulator to 28 psi - please note that if the regulator is set to higher than 28 psi you will need to release pressure from coffee keg once regulator is adjusted to 28 psi.
- 6 d) You will hear nitrogen gas pressurizing the coffee keg for a short time. Check for leaks on beverage connections. Spray soapy water on all gas connections. If air bubbles begin to form, that is the sign of a gas leak.

Step 7: Adjusting Your Nitro Infuser

- 7 a) Start with the Nitrogen Control System (NCS) valve all the way closed and pour a drink.
- 7 b) Open NCS valve one quarter turn from the closed position. Pour and analyze infusion level. Adjust accordingly in quarter-turn increments.
- 7 c) Once the desired infusion level is found, lock in the NCS by tightening the hex nut against the NCS.

CLEANING

Cleaning your tap lines will clean the infusion system. It is recommended that you clean your tap lines every 1-2 weeks. It is recommended to remove your stout nozzle and rinse daily.

SUPPORT

If you are in need of service or support, contact the Enhanced Beverage Solutions team:
+1 (952) 232-5900 or support@enhancedbeveragesolutions.com

Installation videos and manuals may be found at
www.enhancedbeveragesolutions.com/support

WARRANTY: Enhanced Beverage Solutions, LLC (Enhanced Beverage Solutions) warrants that for a period of one (1) years following delivery, the Enhanced Beverage Solutions products you have purchased will (a) perform in accordance with published specifications, and (b) will be free from defects in materials or workmanship. In the event an Enhanced Beverage Solutions product does not meet this warranty, subject to the conditions set forth in these terms and conditions, Enhanced Beverage Solutions' sole obligation will be, at its election, to repair or replace the Enhanced Beverage Solutions products in question.

ENHANCED BEVERAGE SOLUTIONS MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, AND ALL IMPLIED WARRANTIES OF MERCHANTABILITY, NON-INFRINGEMENT AND FITNESS FOR A PARTICULAR PURPOSE ARE HEREBY DISCLAIMED. IN NO EVENT WILL ENHANCED BEVERAGE SOLUTIONS BE LIABLE FOR PUNITIVE, SPECIAL OR CONSEQUENTIAL DAMAGES, OR FOR AN AMOUNT IN EXCESS OF THE PURCHASE PRICE OF THE DEFECTIVE ENHANCED BEVERAGE SOLUTIONS PRODUCT.