

# Guide Installation panels LightConcrete smooth finish



*The Material Wizard*

# Silex element Presentation

Olivier Sénéchal, creative and passionate about materials, founded Silex element, The Material Wizard, in Montreal in 2010. Rapidly, Olivier innovates with concrete and cold metallization techniques to manufacture handmade unique ultralight wall coverings for the most inspiring residential, commercial and hospitality high-end interior designs. Silex's flagship product is **Peau de Béton™** (PDB) available in two finishes: raw concrete and metal.

## A Canadian company expanding beyond borders

Since 2018, Silex hand manufactures its product line in a new 15 000 sq. ft. production facility in LaSalle borough (Montreal QC), to meet high-volume demands. The company contributes to local economic development through its collaborative approach with industry professionals such as engineers, designers, cabinetmakers, and experts in composite materials. As Silex's products are available throughout North America, thanks to its network of representative agents and partnering retail stores, Silex contributes to the Canadian know-how recognition beyond its borders.

## Silex element innovations follow 4 fundamental principles

- Thin and lightweight
- Easy to cut and install
- Each piece is one of a kind
- Designed for a Wow! response

**Silex mission:** Enable each, and everyone to express their personality with a one of a kind showcase piece.

**Silex values:** Passion - Creativity - Esthetics - Ethics - Collaboration - Eco-consciousness

## Eco-consciousness approach

Aware of the importance of contributing to our planet's well-being, Silex element continuously seeks to reduce its environmental impact by favoring North American raw materials sourcing, reducing materials quantities used in manufacturing, and selecting the most environmental-friendly products, including:

- 1/4" thin panels, composed of natural fiber and magnesium oxide mineral
- High performance hand applied microlayer of concrete
- Microlayer of recycled metal powder
- Water based sealer
- ADBOND EXTRÊME 5692 hybrid construction adhesive, Ecologo certified (isocyanate, phthalate, catalyst and solvent free, low odor, non-corrosive), manufactured by a local company.

## Shipping

Silex element offers delivery anywhere in North America, for an additional charge subject to shipment size, weight, and destination. Shipping cost will be quoted for each order.



# Table of Content

## Silex Guide Installation panels LightConcrete smooth finish

Silex element Presentation

Terms and Conditions of Sale

### **LightConcrete - smooth finish**

	<b>LightConcrete- 1</b>
Description	LightConcrete- 1
Application	LightConcrete- 1
Panels Standard Formats and Packaging	LightConcrete- 3
Custom-Made Formats	LightConcrete- 3
Proper Use	LightConcrete- 3
Shipping Cost and Lead Time of Delivery	LightConcrete- 4
Cautionary Statement and Notice of Liability	LightConcrete- 4
Warranty	LightConcrete- 4
Materials and Tools, as required	LightConcrete- 5
Transportation, Storage, Handling and Rubble Disposal	LightConcrete- 5
Prior to Installation	LightConcrete- 6
Cutting	LightConcrete- 7
Bonding	LightConcrete- 7
Silex Finishing Mortar	LightConcrete- 8
Silex Sealer	LightConcrete- 8
Silex Varnish	LightConcrete- 8
Lighting	LightConcrete- 8
Maintenance	LightConcrete- 8
Installation Steps	LightConcrete- 9
Installation Equipment List	LightConcrete- 10

Guide Storage and Handling

Contact Page

# Silex Terms and Conditions of Sale

## 1. DEFINITION OF PRODUCT:

- Standard products: Products in warehouse.
- Special order products:
  - Products Silex does not regularly hold in inventory at the time of purchase
  - Products Silex holds in inventory, however required quantity exceeds standard order quantities.
  - Products that must be obtained through external or internal suppliers special purchase order or production/manufacturing.
- Complementary products and accessories: any other product sold by Silex

**2. ORDER APPROVAL:** Product sale becomes effective upon receipt of a purchase order accepted by Silex and/or upon signature of the purchase order by the customer or distributor or representative, and/or when payment is received. No order will be placed without a security deposit or in accordance with applicable partner terms of payment agreement.

**3. SALE PRICES AND DEPOSITS:** All prices are valid for a period of thirty (30) days from the date of submission. Thereafter, all prices are subject to adjustment to Silex's price in effect on the date of delivery, unless agreed to in writing by both parties. Prices do not include provisions for applicable taxes and/or duties. A minimum deposit of 50% will be required to confirm a special order (non-standard, size or color). Deposits are non-refundable and will be held in full until last product is shipped. The balance of the purchase price is payable by the customer upon delivery.

**4. ORDER DELIVERY AND STORAGE:** The client must ensue delivery approval and reception of all materials within thirty (30) days of the delivery date requested, notwithstanding that such delivery date may be earlier or later than the delivery date requested. If the client wishes to delay the reception of the material beyond this date, Silex may request full payment. Furthermore, in this case, Silex may charge monthly storage fees of 1% of the shipped value, excluding taxes, but Silex is under no obligation to store material on behalf of the client. It is understood that Silex may, at its discretion, dispose of material not accepted by the client.

**5. TRANSPORTATION AND DELIVERY DATES:** Silex commits to undertake all means to meet desired delivery date requested by the client. However, the client acknowledges that delivery dates for products may vary and are beyond the control of Silex. Therefore, the client acknowledges that Silex holds no responsibility for any delay in delivery, whether caused by Silex or a third party, and acknowledges that Silex does not guarantee delivery of the material on the delivery date requested by the client. The client also acknowledges that all transportation charges will be paid by the client to Silex in accordance with the payment terms agreed upon by the parties, and that any transportation of goods by a third party is at the client's risk and expense, whether such transportation has been arranged by Silex on behalf of the client, or not. Silex does not warrant delivery or transportation by a third party, including, but not limited to, quality of service or delivery of materials.

**6. WARRANTY:** Silex's applicable warranty varies according to manufactured product. The client acknowledges that all panels, tiles, slabs, and other products sold are subject to variations in shade, size, and texture. These variations are inherent characteristics of the products manufactured and sold by Silex. Silex's warranty and liability is limited in all cases to the repair or replacement of manufactured products showing potential fabrication defects. At all times, the client and/or installer must inspect any and all products prior to installation and acknowledge that Silex will not be held responsible for any claims of any kind once the product has been opened, installed, and/or applied. It is the client's responsibility to have the products installed by a skilled installer and according to the manufacturer's instructions.

**7. RETURN AND EXCHANGE POLICY:** All returned merchandise must be in its original condition and must not have been opened, cut, installed nor applied. No returns or exchanges will be accepted for custom products or colors. In addition, no returns will be accepted for special order products or merchandise purchased on clearance. It is mandatory to provide the original invoice copy. Returns or exchanges are accepted within thirty (30) days of purchase. Refunds will be made in the original method of payment. Depending on the nature of the product, a handling fee between 15-30% will be applied.

**8. RESERVE OF RIGHTS OF OWNERSHIP:** All Products, present and future, manufactured and sold by Silex to the client remain the exclusive property of Silex until full payment of all amounts due to Silex, whether invoiced or not, all including interest and costs have been made. In the event of non-payment, in addition to all other rights and remedies available to Silex under law, Silex may require the client to deliver all products to Silex or any other person designated by Silex at the time and place specified by Silex, at the client's expense, and Silex may pursue any other remedies provided by law or under this agreement.

**9. LEGAL JURISDICTION AND APPLICABLE LAWS:** This Agreement shall be construed and enforced in accordance with the laws of the Province of Quebec and the applicable laws of Canada. The parties further agree and hereby irrevocably consent to submit to the exclusive jurisdiction of the District Court of Montreal, Province of Quebec, in Canada, in connection with any claim or dispute arising out of the rights and obligations hereunder. The client waives any right to change the location of the lawsuit filed in this court.

**10. LANGUAGE:** Ce document a été rédigé en français à la demande des parties, puis traduit en anglais. This document, in its original form, has been written in French at the parties' request, then translated to English.

**11. DELIVERY, APPLICATION, AND CONTRACTUAL AGREEMENT:** Silex terms and conditions of sale are readily available online on Silex website (<https://silexelement.com>) and upon request. By approving the order when purchasing Silex products, the client and/or intermediary parties, acknowledge having read, understood, and approved Silex terms and conditions of sale. This document constitutes the entire agreement between the parties concerning the subject matter hereof and supersedes all previous negotiations, agreements, and/or understandings, whether oral or written.

# LightConcrete - smooth finish

Ultralight smooth concrete decorative panel



## STANDARD FORMATS

24" x 96"      36" x 60"  
48" x 96"

**FINISH** Satin or matte

## COLORS



Natural



Limestone



Mineral



Ash



Slate

*For illustrative purposes. Order samples for materials natural color variations.*


## DESCRIPTION

The handmade **LightConcrete** panel is thin, ultralight, and easy to handle during fitting. Once installed, it exhibits concrete nuanced smooth look and feel, without the environmental impact of solid concrete, contributing to reducing carbon footprint. The panel is easy to install with the recommended adhesive (see [Silex Guide Installation panels LightConcrete smooth finish](#)), and easy to clean with mild organic products.

## APPLICATION

The **LightConcrete - smooth finish** panel is perfect for commercial and residential interior design in reception halls, meeting rooms, family rooms or dining rooms, or even in bathrooms! With its properties and design, **LightConcrete** panels are an ideal choice for architects, builders, designers, and homeowners looking to differentiate their projects.

Thickness  $\pm 5/16"$   
 $\pm 0.7\%$



Ultralight  
1.9 lbs./ft<sup>2</sup>




Easy to clean  
with mild organic  
products



Antibacterial




Color variations, inherent  
to concrete material,  
color shade sensitive



Fire resistant




Water resistant







*LightConcrete - smooth finish 48" x 96" - Natural*

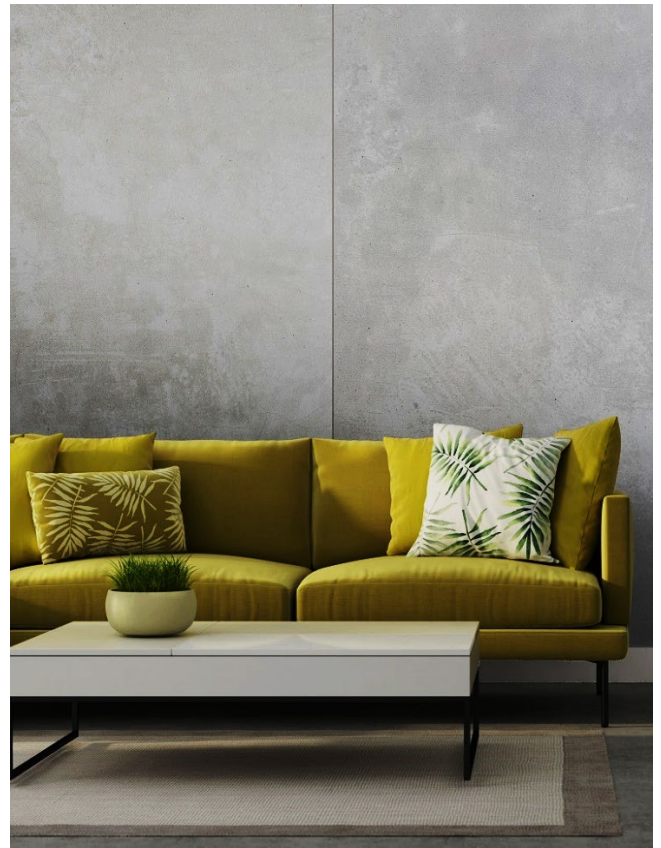

*LightConcrete - smooth finish 48" x 96" - Mineral*




*LightConcrete - smooth finish 48" x 96" - Limestone*




*LightConcrete - smooth finish 48" x 96" - Ash*


## PANELS STANDARD FORMATS AND PACKAGING

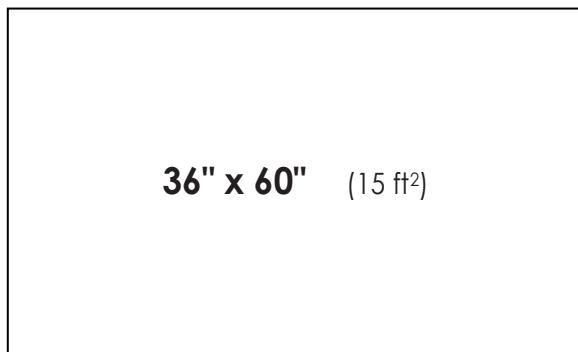

4 panels per case

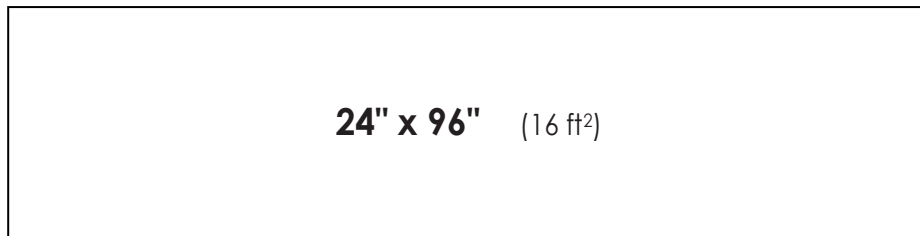

2 panels per case

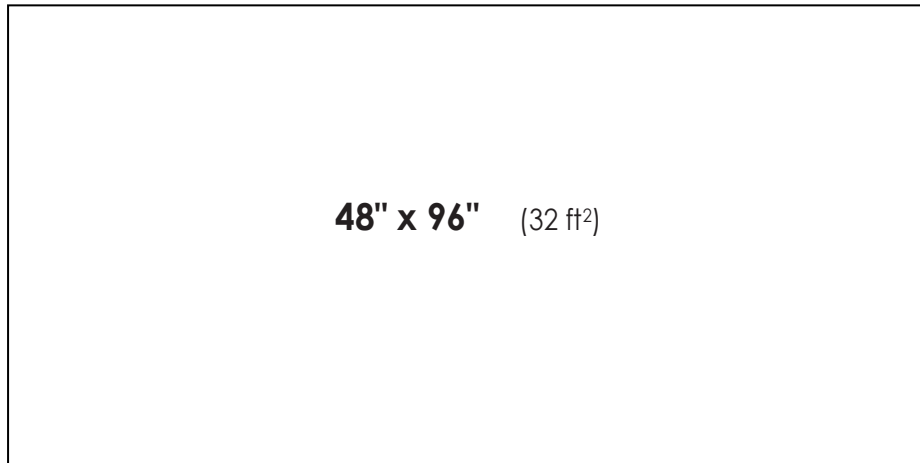

Minimum order:  
4 panels (one pallet)

Panel measurement tolerance:  $\pm 0.5\%$

## CUSTOM-MADE FORMATS

Custom sizes are available for large projects, at the same price per ft<sup>2</sup> as 48" x 96" panels, with additional applicable cutting charges. Contact Silex element at [sales@silexelement.com](mailto:sales@silexelement.com) for additional information.

## PROPER USE

**LightConcrete** panels can be cut and installed on many substrates except glass and metal, ideally on fiber cement or drywall, on walls or ceilings. Once installed, the panels are fire and water resistant, and suited for fireplace surrounds or moist environments, for use as backsplashes or in bathrooms, or even in shower areas with the proper installation and additional surface protection. **LightConcrete panels should not be installed on floors.**

Images shown in this document are not contractual. Visuals and pictures are used for illustrative purposes of colors and projects possibilities. **For materials natural color variations, order product samples.**



## SHIPPING COST AND LEAD TIME OF DELIVERY

Shipping costs are invoiced in addition depending on freight weight, size, quantity, and destination.

Lead time of delivery for **LightConcrete - smooth finish** panels, varies based on inventory at hand, from **1 to 6 weeks**, including artisanal manufacturing, handling, and transport time, depending on product SKU, color, size, and quantity ordered. **Order recipients must check their emails (including junk mails) for the order shipping date confirmation notice.**

## CAUTIONARY STATEMENT AND NOTICE OF LIABILITY

Before using Silex element products, the user has a duty of inquiry to ensure products are suitable for the purposes for which they are intended, and the user must verify order content upon delivery (color, size, quantity, and goods condition). The user will bear any, and all risks, and liability of whatever nature.

**Follow Silex recommendations for handling, storage, and installation of the product.**

Refer to [Silex Guide Storage and Handling](#), and [Silex Guide Installation panels LightConcrete smooth finish](#).

**The Silex LightConcrete panel cannot be used as structural support.** It should not be installed outdoors, nor on floors, nor be in direct contact with water (i.e., shower area, basin, or pools) without appropriate installation and additional surface protection. It should not be in direct contact with intense heat source nor running water before installation. **Do not use water-based adhesive for installation.**

**\*\*\* ANY OPEN CONTAINER, PRODUCT INSTALLED OR APPLIED WILL NOT BE REPLACED NOR REFUNDED \*\*\***

## WARRANTY

Manufacturing defect warranty period for **LightConcrete** panels is 10 years with normal product usage, as recommended by Silex element.

As with any item made of concrete or metal, the panel finish may exhibit microcracks, irregularities and uneven surface, which do not compromise the integrity of the product. These singularities are not manufacturing defects but are an integral part of each panel's unique embellishment.

No warranty applies if the panel has been improperly transported, handled, or installed, or if it has undergone damage caused by a third party. See [Silex Guide Installation panels LightConcrete smooth finish](#). There is no guarantee on anticipated results.

Read Silex Terms and Conditions of Sale readily available on Silex Website.

## MATERIALS AND TOOLS, AS REQUIRED

### Recommended Silex Products

- ADBOND EXTRÊME 5692 solvent-free hybrid construction adhesive (1 tube of 295 ml (10 oz) for ± 32 ft<sup>2</sup> of panels). **Do not use water-based adhesive for installation.**
- **Silex Finishing Mortar**, optional, similar color variation as panels, to fill in joint spaces.
- **Silex Touch-up Mortar**, optional, similar color variation as panels, to fill in any installation holes.
- **Silex Sealer**, optional, for additional protection of backsplashes, high traffic, and damp areas. Sealer is sufficient for any horizontal surface that does not require special protection.
- **Silex Varnish**, optional, is required for any damp environment, such as in bathrooms (do not install **LightConcrete** panels on the floor), and for horizontal high traffic areas, or for added protection of backsplashes and shower areas.

### Resources

Downloadable on [silexelement.com/pages/guides](https://silexelement.com/pages/guides)

- **Silex Guide Installation panels LightConcrete smooth finish**
- **Silex Guide Storage and Handling**

### Tools and equipment


Refer to appendix tables under **Equipment list for installation**, and to **Silex Glossary Tools and Equipment**.

## TRANSPORTATION, STORAGE, HANDLING AND RUBBLE DISPOSAL

Transport panel packaging vertically on the long edge, and not flat, horizontally. Store them laterally lengthwise against a wall in a dry place, away from moisture and cold temperatures.



Remove panels from packaging and **check they comply with initial order** (color, format, quantity, and condition). Store them lengthwise against a wall, to avoid warping panels, or simply stack them flat on leveled ground. **Allow panels to absorb room humidity for about 24h before installation.**



Even if panels have a bending resistance, **large formats must be handled by at least two people** to lift horizontally on a plywood board for installation phase and transport vertically. For panel overturn, have one hand on each side (width & length) and be careful of panel corners. Refer to **Silex Guide Storage and Handling** in enclosed appendix.



To reduce ecological footprint, please take renovation wastes to your local recycling facility.

**\*\*\* Wear protective equipment when handling, cutting, and installing panels. \*\*\***

## PRIOR TO INSTALLATION

### Substrate preparation



Panels must be installed on a **flat smooth, clean, dry, and dust-free substrate** for better adhesive bond.



If **Silex Finishing Mortar** is not used to fill in the 2 mm (1/16") joint spaces, it is advised to **paint substrate surface area** with a color in harmony with panels' shades **before proceeding with the installation phase**, for a more pleasing final rendering.

### Panels must be straight (not curved) for the installation phase



As any living material, a **panel can exhibit a slight curvature** due to a change in temperature. To return the panel to its original shape, lightly wet the back of the panel, then place it, finished side down, on a level surface, and evenly distribute weight on top, for 24h. It is possible to stack several panels.

**Do not press excessively on the panel to avoid damaging it during installation.**

**Do not put the panel in direct contact with intense heat or water.**



Leave at least a **2 mm (1/16") spacing between panels** while installing with adhesive, for panel expansion. The space can be left as is or filled with **Silex Finishing Mortar** of similar color variation.




A **metal edge profile**, i.e., Schluter®, can be used (refer to manufacturer's Website for installation).



**Installation technique for large 24" x 48" and 48" x 96" panels**, in addition to the adhesive, to strengthen the panel hold while the adhesive fully sets (24h).

**Ceiling installation:** Place each panel (finished face down) on a smaller plywood board, which will act as a support for horizontal lifting of the panel to the ceiling, handled by at least two people. Apply adhesive and fix panel in place as recommended below.

**Wood shims best option:** use self-drilling screws suitable to substrate behind panels. Screw in temporary wood shims into joint spaces to hold each panel in place while the adhesive fully sets.

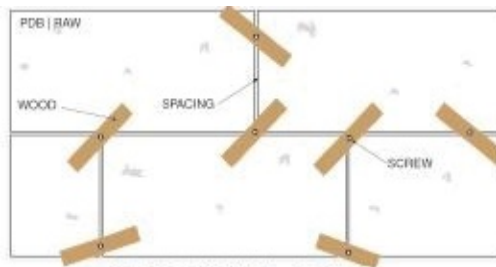

**Nailing option:** use finishing nails (18 Ga) with appropriate gun pressure in order not to damage panel.

**Installation holes fill in option:** use **Silex Touch-up Mortar**, of a similar panel color variation, to fill in any installation holes. Smooth off any mortar excess with a damp sponge.

## CUTTING

The cutting phase is to be carried out in a ventilated area with protective equipment against dust.






Apply painter's masking tape onto surface to be cut, before proceeding. To cut panel full **length or width**, use a wet saw, an angle grinder, or a circular saw with a diamond blade, leaning against a guide rail, held by clamps. **Do not use a mechanical tile cutter.** Smooth cut edges with sandpaper.



**To make an opening** (sockets, cables, etc.) apply painter's masking tape onto surface to be cut. To start the cut, drill a hole in the panel with a drill fitted with a concrete bit. Use an electric oscillating saw. Smooth cut edges with sandpaper.




Wall **corner junctions** can be done in several ways. Panels can be juxtaposed, cut at a 45° angle, or covered with a metal edge profile. Use a circular saw with a guide to make a 45° angle cut.



## BONDING


Silex recommends the hybrid construction adhesive, isocyanate, phthalate and solvent free **ADBOND EXTREME 5692 (Adfast)** for panels installation onto a variety of substrate (1 tube of 295 ml (10 oz) for ± 32 ft² of panels). Refer to the manufacturer's recommendations. **Do not apply water-based adhesive to panels.** Leave a 2 mm (1/16") joint space for panel expansion.



**For horizontal panel installation:** apply ADBOND EXTREME 5692 adhesive, using a caulking gun, around the entire perimeter of the panel, at least 1.5" from the edge, and inside in horizontal lines ± 8" apart.



**For vertical panel installation:** apply ADBOND EXTREME 5692 adhesive, using a caulking gun, around the entire perimeter of the panel, at least 1.5" from the edge, and inside in vertical lines ± 8" apart.





## SILEX FINISHING MORTAR

**Silex Finishing Mortar** is available in a similar shade as the finished panels. The mortar can be used to fill in temporary large panel installation holes and/or joint spaces. The **Silex Finishing Mortar** is a premixed and pre-colored powder packaged in buckets of 2.25 kg (5 lbs.) or 4.53 kg (10 lbs.).



**Mortar mixture ratio** is 3.5 parts of powder to 1 part of water. Let mixture stand for 5 min. before use. Mixture should be smooth but able to hold into the trowel on its own. Keep the same ratio for all mixtures. To fill the joints, first apply painter's masking tape to panels outer edges to protect them from overflows. Humidify joint spaces with a wrung out sponge so mortar bond would be optimal. Apply mortar in joint spaces with a joint knife. Use a damp sponge to remove any excess and to even out. Rinse and wring out the sponge with each pass. Remove painter's tape while the mortar is wet. The mortar sets in about 15 min.

## SILEX SEALER

One coat of colorless **Silex Sealer** has been applied in the finishing phase of the manufacturing process. After installation, an additional coat of **Silex Sealer** should be applied on site, for increased protection of backsplashes, high traffic areas and solicited surfaces. Surface should be thoroughly dusted, wiped clean, and fully dry before application.



Temperature of application of **Silex Sealer** should be between 5° C and 25° C (41° F and 77° F), ideally between 15° C and 20° C (**59° F and 68° F**). Put painter's masking tape on outer edges of surface area to protect from overflows. Pour sealer into a paint tray. Begin application on corners and edges with a stain and paint brush, then apply sealer over the entire surface in a thin layer with no extra thickness. Remove excess liquids and drips with a clean microfiber cloth. While drying, protect the unfinished surface from stains and damage. Remove painter's masking tape while sealer is still damp.

## SILEX VARNISH

**Silex Sealer** provides sufficient protection for unsolicited horizontal surfaces. The **Silex Varnish** is required for installation in moist environments, such as bathrooms, in the shower area, and for highly solicited horizontal surfaces, or for adequate protection of kitchen backsplashes. Do not install **LightConcrete** panels on the floor. Up to two coats of colorless **Silex Varnish**, satin, or matte finish, can be applied. Allow at least 24h for the last coat to dry.



Temperature of application of **Silex Varnish** should be between 5° C and 25° C (41° F and 77° F), ideally between 15° C and 20° C (**59° F and 68° F**). Apply painter's masking tape on outer edges of the surface area to protect from overflows. Apply using a slit foam lacquer roller (water washable). **Wait 24h between each coat.** During drying time, protect surface from stains and impairment. Remove painter's masking tape while varnish is still damp.

## LIGHTING

Design the best lighting that will highlight the variations of visual and texture effects, as the finished surface will absorb or reflect light, depending on the exposure and the light colors used.

## MAINTENANCE

**LightConcrete** panels can be easily cleaned with mild organic products, and sponge soaked in lukewarm water and wrung out. Wipe with a clean cloth and let air dry.

## INSTALLATION STEPS

Refer to **Silex Guide Installation panels LightConcrete smooth finish** (downloadable on [silexelement.com/pages/guides](https://silexelement.com/pages/guides)) and to shared tips for each step.

1. Make sure appropriate products' quantities have been ordered with an installation diagram
2. Open packaging, verify content, and prepare required tools, accessories, and protective equipment
3. As required, prepare and prime substrate surface
4. Verify levels and measurements, including the 2 mm (1/16") joint spaces between panels
5. If panels exhibit a slight curvature, refer to Silex technique and tips to revert to original shape
6. Cover floor and furniture with protective sheets, and proceed with surface preparation
7. Follow Silex recommendations for panel cutting, and sand edges if necessary
8. Handle large panels by two people, and use a plywood board for horizontal lifting as instructed
9. Apply bonding adhesive to panel back side
10. Do not forget to account for a 2 mm (1/16") joint space during panel installation
11. For swifter bonding, and for larger panels, use temporary wood shims
12. After the adhesive fully sets (24h), remove temporary wood shims
13. Protect panels edges with painter's masking tape for the following applicable steps
14. Optional finishing: fill in joint spaces with **Silex Finishing Mortar**
15. Optional finishing: fill in installation holes with **Silex Finishing Mortar** or **Silex Touch-up Mortar**
16. Apply **Silex Sealer** and/or **Silex Varnish** to high-traffic area, solicited surface, bathroom, or backsplash
17. Bring renovation wastes to the local recycling facility
18. Design the best lighting to highlight panels visual and texture effects and variations

# Installation Equipment List

Table listing Silex element products for **LightConcrete - smooth finish**.

	<b>LightConcrete Panel installation</b>
<b>Recommended by Silex:</b> <b>ADBOND EXTRÊME 5692 hybrid construction adhesive</b> 1 tube of 295 ml (10 oz) for $\pm 32$ ft <sup>2</sup> of panels	To add to initial order based on total panel ft <sup>2</sup>
<b>Silex Finishing Mortar</b> Pigmented powder in similar shade variation as panel color Designed for LightConcrete panels Bucket: 2.25 kg (5 lbs.) or 4.53 kg (10 lbs.)	Optional Joint spaces
<b>Silex Touch-up Mortar</b> Pigmented powder in similar shade variation as panel color Designed for LightConcrete panels Jar: 300 g (10.6 oz) or 500 g (17.6 oz)	Optional To fill in installation holes
<b>Silex Sealer</b> Colorless, satin, or matte finish Container: 200 ml (6.7 oz), 400 ml (13.5 oz), 800 ml (27 oz) or 946 ml (32 oz) - 2-coat coverage of $\pm 112$ ft <sup>2</sup>	Optional For additional protection of backsplashes and high-traffic areas
<b>Silex Varnish</b> Colorless, satin, or matte finish Container: 200 ml (6.7 oz), 400 ml (13.5), 800 ml (27 oz) or 946 ml (32 oz) - 2-coat coverage of $\pm 90$ ft <sup>2</sup>	Optional For extra protection of backsplashes and high-traffic areas
<b>Find accessories available on Silex Website</b>	Visit <a href="http://www.silexelement.com">www.silexelement.com</a>

Quantity conversion in US units

Table of required tools and equipment for Silex **LightConcrete - smooth finish** panel installation.
















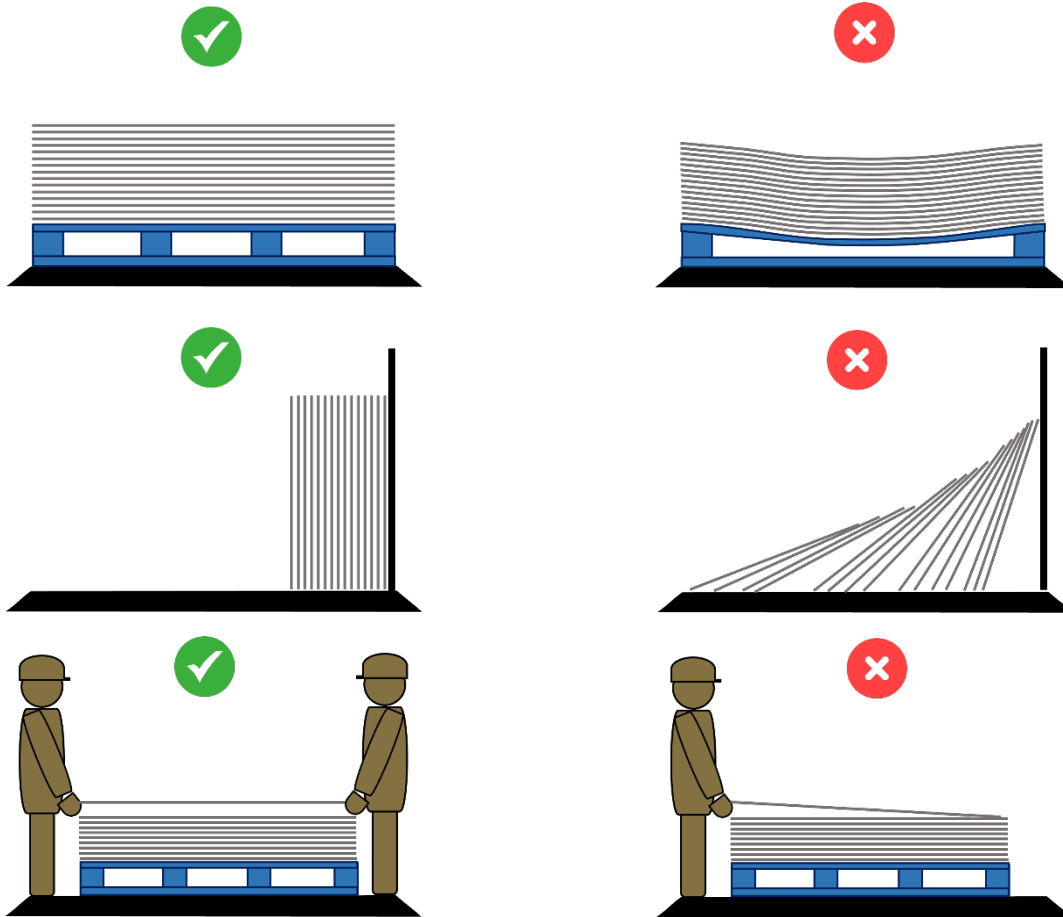
	Tools and equipment	LightConcrete Panel installation
Safety eyewear		√
Dust mask		√
Gloves		√
<b>ADBOND EXTRÊME 5692</b> <b>Hybrid construction adhesive</b> 1 tube of 295 ml (10 oz) for ± 32 ft² of panels		√
Angle square		√
Beam level		√
Caulking gun		√
Circular saw with a diamond blade		√
Container for rubbles		√
Dust extractor		√
Electrical oscillating saw		√
Installation diagram		√
Microfiber cloths		√
Protective sheets		√
Wet saw		√




Table of required and optional tools and equipment for Silex product installation.

	Tools and equipment	LightConcrete Panel installation
Angle grinder		√ Cutting angles
Clamps		√ Cutting length
Guide rail for saw		√ Cutting length
Sandpaper sheets 120 & 220 grit		Optional Sanding
Plywood board slightly smaller than larger size panels		√ Large panels Handling
Drill with masonry drill bit		Optional Large panels
Finishing nails (18 Ga)		Optional Large panels
Nail gun		Optional Large panels
Self-drilling screws		Optional Large panels
Wood shims		Optional Large panels
Grout sponge		Optional Mortar
Joint knife 4" or 5"		Optional Mortar
Measuring cup		Optional Mortar
Painter's masking tape		Optional Mortar/Sealer/Varnish
Paint tray		Optional Sealer/Varnish
Slit foam lacquer roller		Optional Sealer/Varnish
Stain and paint brush		Optional Sealer/Varnish
Metal edge profile (i.e., Schluter®)		Optional
Laser level		Optional

# Silex Guide Storage and Handling



To avoid bending the center of the panel, lean on stack pile to rotate the panel vertically.

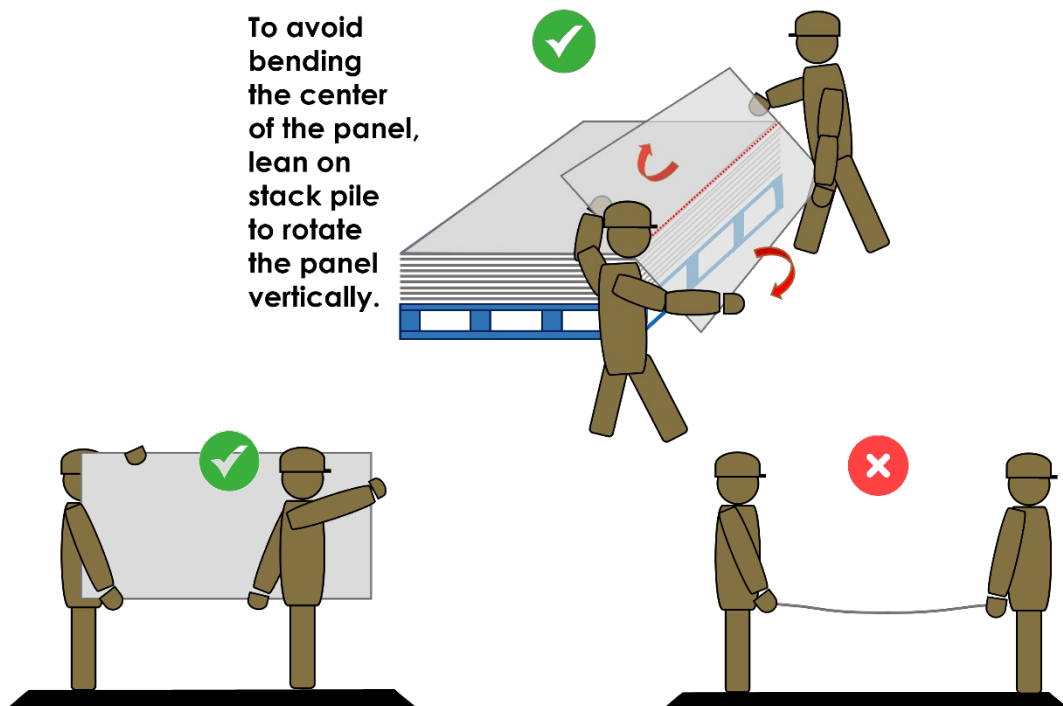



**Silex element**

1 (438) 382-9796

Office: 7328 Cordner Street  
LaSalle (QC) H8N 2W8, Canada

[silexelement.com](http://silexelement.com)

[sales@silexelement.com](mailto:sales@silexelement.com)