

- 1. Take the elements A, G, J.
- 2. Fasten the parts with (M) screws as shown in picture using the hex key (P).
- 3. Insert part(A) into the hole. Please note that the door can open left and right.
- ! If you want the doors to open to the left
- !! If you want the doors to open to the right







@wowhelperco



https://www.facebook.com/wowhelperco/



https://www.pinterest.com/PetsHelperCo/









Facebook

Pinterest


















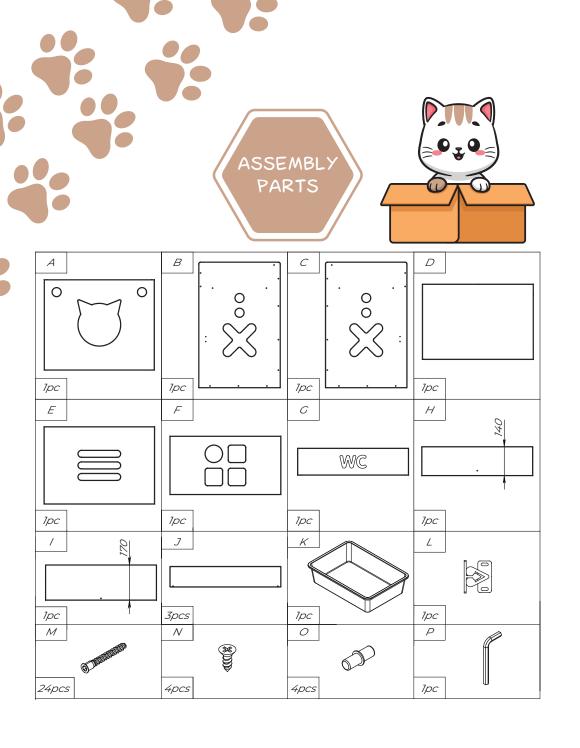








Insert the pieces (O) into the holes.

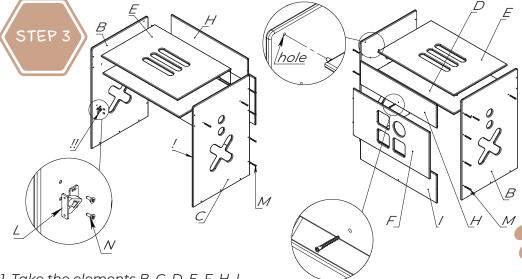

- 1. Take the elements B, C, D, E, F, H, I.
- 2. Fasten the parts with (M) screws as shown in picture using the hex key (P).
- 3. Fasten the part (L) with screws (N). Please note that the door can open left and right.
- ! If you want the doors to open to the left
- !! If you want the doors to open to the right

