

CONTACT LAYOUT:

Note: Layouts shown are when viewed from the rear of the relay.

	A	B	C	D	
1	F			F	
2	F			F	
3					
4					
5	B			B	
6	B			B	
7					
8					
R1	C			C	R2
R3					R4


4F 4B

QSA3

CHARACTERISTICS:

This style of relay is a miniature ac immune, dc neutral, tractive armature, sensitive relay designed for signalling purposes. The unit is comprised of a neutral relay fitted with a slug and shunt on the core, providing immunity to 1000 volts ac RMS at 50Hz.

The contacts are Silver impregnated Graphite to Silver (SIG/Sil). The relays conform to BRB Spec 931A.

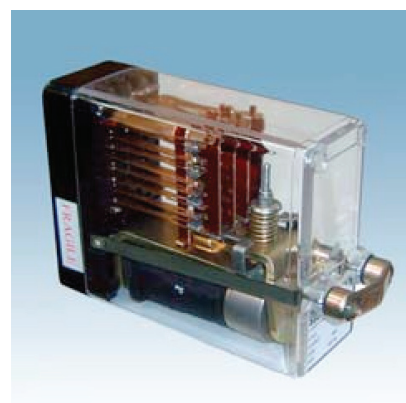

Product code	Nominal working volts	Contacts	Coil resistance (ohms)	Max full operating volts	Minimum release volts	Interlocking
QSA3-4841604	24	4F 4B	1,000	19.2	3.6	CDEKY