



Performance Air Intake Kit

Part Number: 827-710 / 27-710

2006 - 2013 Lexus IS250 2.5L

2006 - 2013 Lexus IS350 3.5L

2010 - 2015 Lexus IS250C 2.5L

2010 - 2015 Lexus IS350C 3.5L

Installation Instructions

For technical inquiries please email us at tech@hpsperformanceproducts.com

In the email, please include the following information for faster response:

- Year / Make / Model / Engine of your vehicle.
- If it is a fitment issue, please include pictures showing the fitment problem.
- If there are missing parts, please list the part number(s) from the bill of materials on the 2nd page.
- Optional but recommended – Your contact phone number and preferred call back time.

You can also give us a call via 626-747-9200 for tech support Monday-Friday, 9:00am-5:00pm Pacific Time.

Bill of Materials

Kit Number: 827-710

Line	Description	Part Number	Qty
1	Intake Pipe	529-628	1
2	HPS Performance Panel Air Filter	HPS-457034	1
3	3.12" – 3.25" Reducer Coupler x 3" Long	P3SR-312-325-L3	2
4	EMSC Clamp for 3.25" Hose	EMSC-70-90	4

Kit Number: 27-710

Line	Description	Part Number	Qty
1	Intake Pipe	529-628	1
2	3.12" – 3.25" Reducer Coupler x 3" Long	P3SR-312-325-L3	2
3	EMSC Clamp for 3.25" Hose	EMSC-70-90	4

- Before installing any parts of this intake system, please read the instructions thoroughly.
- Verify the contents of this intake kit before disassembling your vehicle.
- Report any defective or missing parts to HPS directly. The HPS dealer you purchased this product from might not have the replacement parts you need.
- Installation requires moderate mechanical skills. A qualified mechanic is highly recommended.
- Do not attempt to install the intake system while the engine is hot.
- This installation may require removal of coolant lines that may be hot.
- For technical inquiries, please e-mail us at tech@hpsperformanceproducts.com

PLEASE READ CAREFULLY BEFORE INSTALLATION!


This installation is not for the novice customer. Install this product with **EXTREME** caution! Misuse of this product can destroy your engine! If you are not mechanically inclined, please have a professional automotive mechanic install this kit.

NOTE: HPS holds no responsibility for any engine damage that results from misuse of this product.


GETTING STARTED

1. Turn the ignition OFF and disconnect the vehicle's negative battery cable. If the engine has run within the past two hours let it cool down.

NOTE: Disconnecting the negative battery cable erases pre-programmed electronic memories. Write down all memory settings before disconnecting the negative battery cable. Some radios will require an anti-theft code to be entered after the battery is reconnected. The anti-theft code is typically supplied with your owner's manual. In the event your vehicles' anti-theft code cannot be recovered, contact an authorized dealership to obtain your vehicles anti-theft code. We also highly recommend NOT discarding any stock parts after the installation.

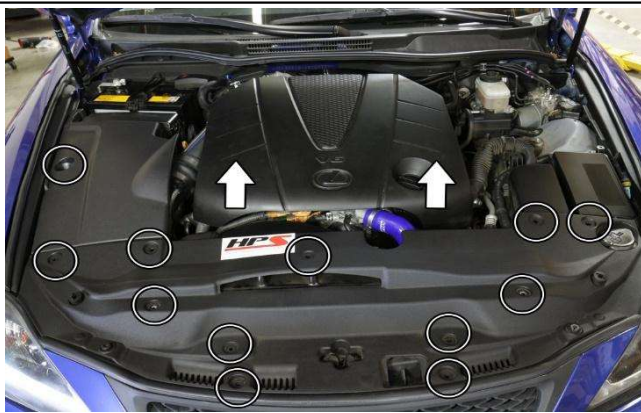

2. Lift and remove the engine cover from the vehicle. Remove the 12 plastic clips securing the air box cover and the radiator cooling panel. Remove the panels from the vehicle.

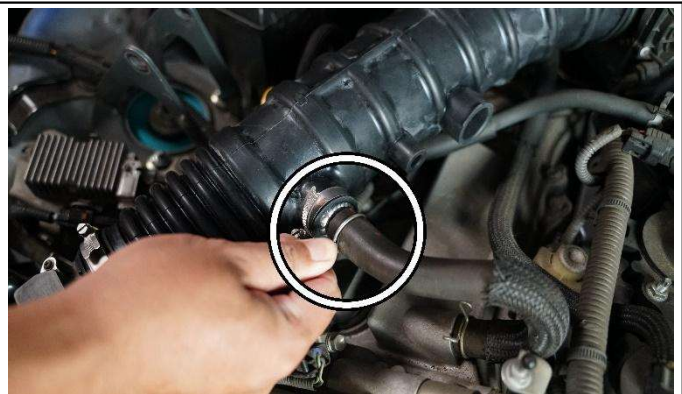

3. Loosen the clamp securing the breather hose from the factory intake tube and disconnect the hose from the intake barb.



4. Release the four retaining buckles securing the top portion of the air box.



5. Loosen the hose clamps securing the intake hose from the throttle body and the air box. Remove the factory intake hose from the vehicle.

For Part # 827-710, proceed forward to Step 6.

For Part # 27-710, skip Step 6 and go to Step 7.



6. Remove the factory air filter and insert the HPS performance panel air filter into the air box assembly.



7. Install and secure the silicone coupler onto the throttle body using the supplied EMSC clamps.



8. Install and secure the silicone coupler onto the air box using the supplied EMSC clamps.



9. Insert the HPS intake pipe into the throttle body side coupler, then into the airbox coupler. Secure the retaining buckles back onto the air box assembly, then adjust the intake pipe into the proper position and secure all the hose clamps.



10. Re-secure the breather hose onto the intake barb.



11. Re-install the engine cover and all the panels back onto the vehicle.

Final Steps

Once the intake has been positioned, tighten all of the clamps and secure all of the parts.

Upon completion of the installation, reconnect the negative battery terminal before you start the engine. Double check to make sure everything is tight and properly positioned before starting the vehicle.


Start the engine. Let the car idle for 3 minutes. Perform a final inspection before driving. Listen carefully for any odd noises, rattles and/or air leaks prior to taking it for a test drive. If any problems arise go back and check the vacuum lines, hoses and clamps that may be causing leaks or rattles and correct the problem.

Periodically, recheck the alignment of the intake system and make sure there is proper clearance around and along the length of the intake. Failure to follow proper maintenance procedures may cause damage to the intake and will void the warranty.

HPS Performance Air Intake Tube with Drop-In Air Filter
2006-2013 Lexus IS250 2.5L / 2006-2013 Lexus IS350 3.5L
Part Number: 827-710

Maximum Horsepower Gains = 4.6 whp @ 5050 rpm

Tested Vehicle: 2012 Lexus IS350 3.5L V6

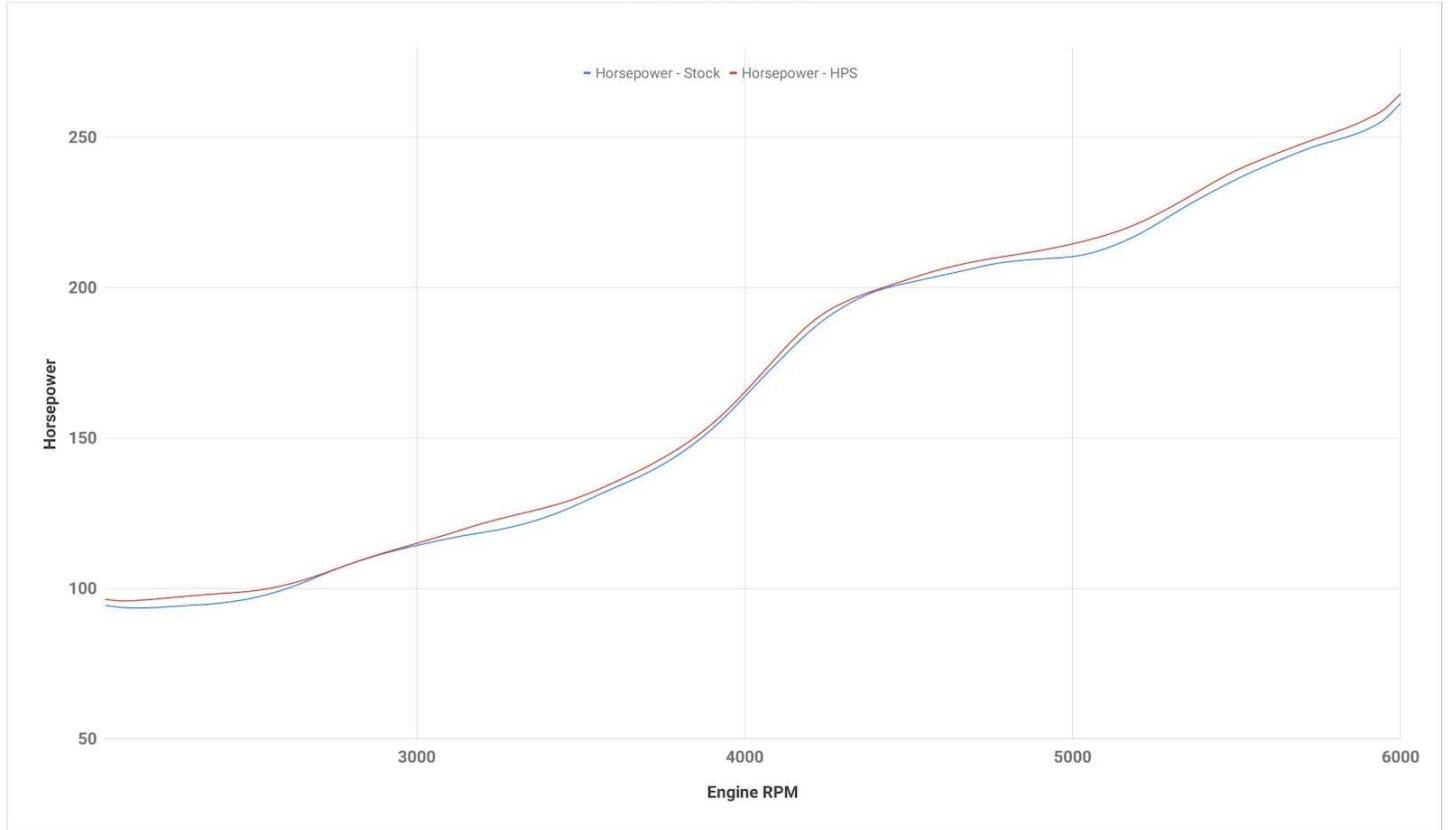

HPS Performance Air Intake Tube with Drop-In Air Filter
2006-2013 Lexus IS250 2.5L / 2006-2013 Lexus IS350 3.5L
Part Number: 827-710

Maximum Torque Gains = 4.8 ft/lb @ 5050 rpm

Tested Vehicle: 2012 Lexus IS350 3.5L V6

