


**40UT2.25-51**

Kontroll-Nr. --

2024-02-21 V.01.02.2023

| Pos.no      | Item no.   | Description   | Qty. |
|-------------|------------|---|------|
| 40UT2.25-51 |            |  <p style="text-align: center;"><b>40UT2.25-51</b></p> |      |
| 2.1.1       | 173-001-35 | Packing & O-Ring Set  | 1    |
| 1           | 001-TEG-31 | Cabletyre Cable Set (20m) H07RN-F4Cx1,5mm <sup>2</sup> with gland   | 1    |
| 2           | 140-427-17 | Hex.Bolt (w/Plain Washer) M5x15 SUS304 (EN X5CrNi18-10)   | 2    |
| 3           | 003-190-10 | Gland SUS316 (EN X5Cr-Ni-Mo17-12-2)   | 1    |
| 4           | 140-253-10 | Hex. Socket Cap Bolt M6x25 SUS304 (EN X5CrNi18-10) Stainless Steel  | 2    |
| 5           | 068-146-38 | Handle A Resin  | 1    |
| 6           | 140-396-16 | Hex.Bolt (w/Plain Washer) M6x20 SUS304 (EN X5CrNi18-10) Stainless Steel   | 3    |
| 7           | 051-000-28 | Motor Head Cover FC200  | 1    |
| 8           | 143-000-13 | Truss Screw M4x8 SUS304 (EN X5CrNi18-10)  | 2    |
| 9           | 053-001-40 | Motor Protector 380/400/415V-50Hz(EUR) KA311-DPTL65 (H.C)   | 1    |
| 10          | 121-000-84 | Packing NBR   | 1    |
| 11          | 009-001-16 | Earth Terminal UL1015-AWG18,G/Y,L=132   | 1    |
| 12          | 143-086-35 | Pan Screw M4x8 BSBM   | 1    |
| 13          | 050-451-18 | Motor Bracket SECD  | 1    |
| 14          | 142-451-16 | Wave Washer 6201(D=32,t=0.25) SUP   | 2    |
| 15          | 052-100-15 | Bearing 6201ZZC3  | 1    |
| 16          | 055-000-32 | Rotor   | 1    |
| 17          | 061-180-17 | Bearing Collar d15.1xd20x1.6t SS  | 1    |
| 18          | 052-101-16 | Bearing 6202ZZC3  | 1    |
| 19          | 056-004-08 | Stator 380/400/415V-50Hz(EUR)   | 1    |
| 20          | 064-000-71 | Motor Frame FC  | 1    |
| 21          | 025-000-81 | Mechanical Seal W-14VL SSiC (ROHS)  | 1    |
| 22          | 030-000-09 | Oil Lifter W-14VL Resin   | 1    |
| 23          | 122-133-17 | O-Ring G-110 NBR  | 1    |
| 24          | 140-057-12 | Hex.Bolt M8x30 SUS304 (EN X5CrNi18-10) Stainless Steel  | 3    |
| 25          | 029-000-58 | Oil Casing HS2.4(S)-51/61 FC  | 1    |
| 26          | 121-246-11 | Packing (Oil Plug) d10.3xd16x2t PE  | 1    |
| 27          | 035-124-12 | Oil Plug M10x15 SUS304 (EN X5CrNi18-10)   | 1    |
| 28          | 121-000-20 | Packing HS-4E NR  | 1    |
| 29          | 140-256-13 | Hex.Socket Cap Bolt M6x35 SUS304 (EN X5CrNi18-10)   | 3    |
| 30          | 071-292-14 | Shaft Sleeve LB3-250/480 SUS304 (EN X5CrNi18-10) Stainless Steel  | 1    |
| 31          | 142-354-18 | Conical Spring Washer d11.2xd22.5x0.8t SUS304 (EN X5CrNi18-10) Stainless Steel  | 1    |
| 32          | 021-G26-29 | Impeller (50HZ) 40PNZ2.25S-53 Resin PPO+GF20  | 1    |
| 33          | 142-127-10 | Plain Washer M8 SUS304 (EN X5CrNi18-10) Stainless Steel   | 1    |
| 34          | 141-005-18 | Hex.Nut M8 SUS304 (EN X5CrNi18-10)  | 1    |
| 35          | 020-001-85 | Pump Casing 40UT2.4S-51/61 FC200  | 1    |
| 36          | 140-057-12 | Hex.Bolt M8x30 SUS304 (EN X5CrNi18-10) Stainless Steel  | 2    |
| 37          | 048-130-11 | Screwed Flange 40mm(P.C.84) FC200   | 1    |
| 38          | 121-138-19 | Packing (Screwed Flange) LB(P.C.84) NBR   | 1    |
| 39          | 141-005-18 | Hex.Nut M8 SUS304 (EN X5CrNi18-10)  | 2    |

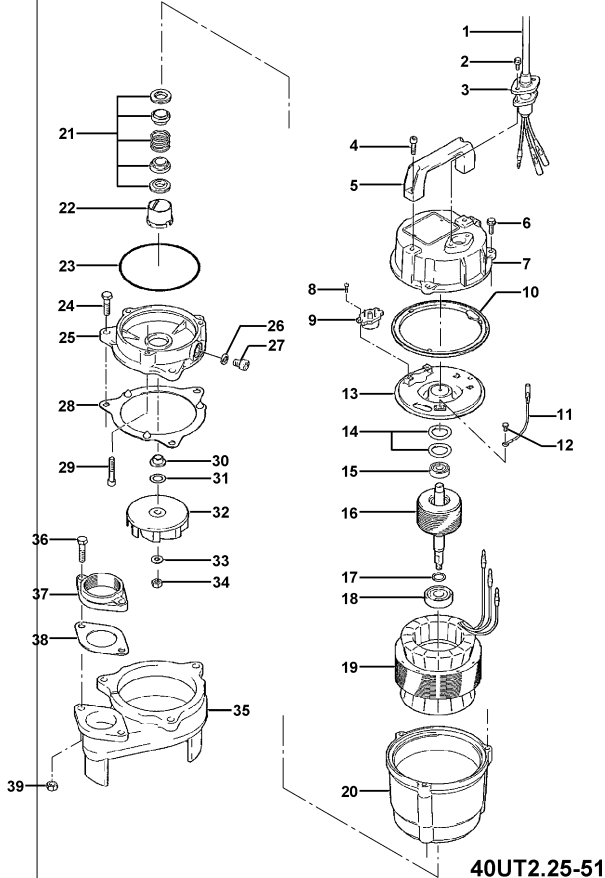