



www.pumps.com.tw

MVH series

Multistage Drainage Pump

Submersible Pumps with Three Stages
For Higher Pressure Drinking Water
Max Head Up to 32M

Liquid temperature : 0 °C to 40 °C / +32 °F to +104 °F

HP range : 3/4 HP / 600 W

pH : 6 to 8

Protection class : IP68

Maximum immersion depth : 8M



Solid pass : 3mm



HUNG PUMP GROUP

High Pressure Pumps

Dimension			
Model	A	B	C
MVH-10	461	162	171

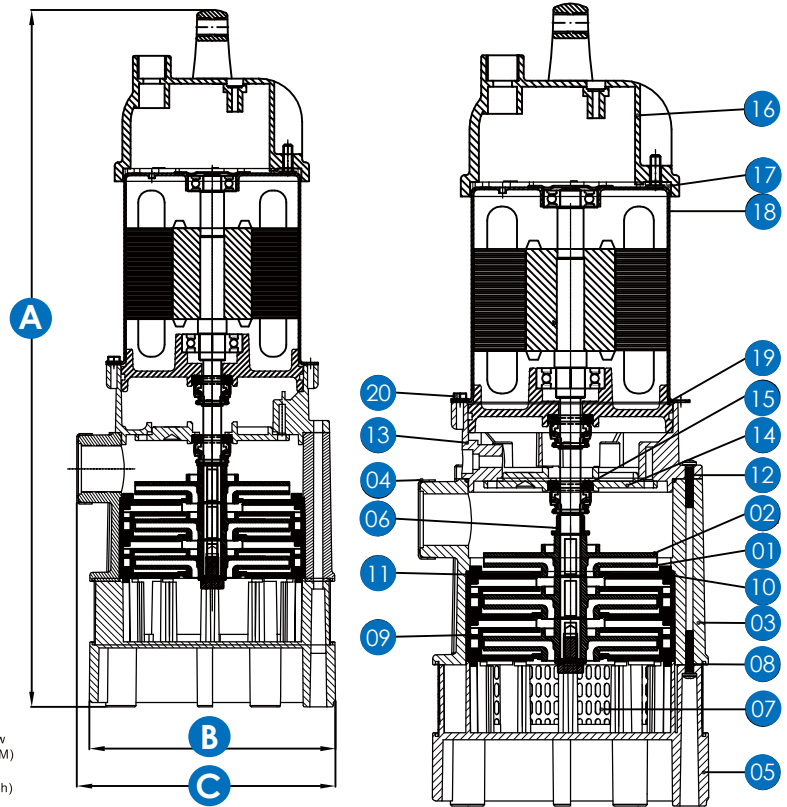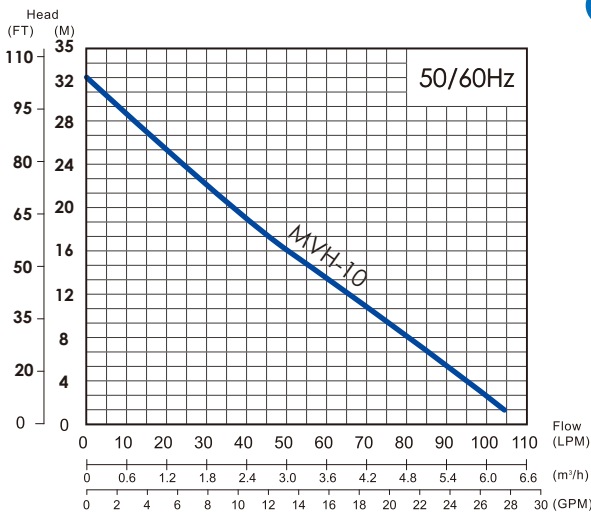

Three closed vane impellers made from industrial plastic endure erosion wearing & impact.



All wetted parts are anti-rusted materials.



High head, low horsepower & low noise.



Apply for drinking water in narrow space.



Strainer



Food-grade oil inside oil chamber.

Construction					
No.	Description	Material	No.	Description	Material
1	Upper Impeller	PPO+GF	11	Impeller Bushing	SUS304
2	Lower Impeller	PPO+GF	12	Screw	SUS304
3	Pump Casing	NYLON+GF	13	Seal Plate	NYLON+GF
4	Discharge Ring	SUS304	14	Oil Seal Cover	NYLON+GF
5	Bottom	PP+GF	15	Mech. Seal	SIC/CE
6	Sleeve	SUS304	16	Top Cover	NYLON+GF
7	Strainer	SUS304	17	Packing	NBR
8	Screw	SUS304	18	Motor Casing	SUS304
9	Diffuser	PPO+GF	19	O-ring	NBR
10	Stop Plate	PPO+GF	20	Screw	SUS304

Specification

Model	Output		Stages	Outlet		Solid Pass Dia (mm)	Max Flow (LPM)	LPM Flow @ Head					Max Head (M)	Dimension L x W x H (mm)	Weight (Kg)
	HP	W		mm	inch			5M	10M	15M	20M	25M			
MVH-10	3/4	600	3	25	1"	3	105	92	72	52	35	30	32	171 x 162 x 461	12