


SPERONI®

RSX(M)4


HORIZONTAL MULTI-STAGE

RSX(M)4 are non self-priming, multi-stage, horizontal centrifugal pumps with all the components that are in contact with the liquid constructed in 304 stainless steel. For the pumping of clean water only, they develop high pressures from comparatively small motors and operate virtually silent, hence they are suitable for domestic use, in addition to industrial, horticultural and processing applications. Optional pump control and energy management systems are available (see pages 98 to 101).

Operating Conditions: Continuous duty | Max. ambient temp: 40°C | Max. suction lift (+ foot valve): 7 mtrs

Fluid: Clean water | Temperature: 0 - 90°C

Application: Pressurisation units | Sprinklers | Washing | Irrigation | Water supply | Cooling

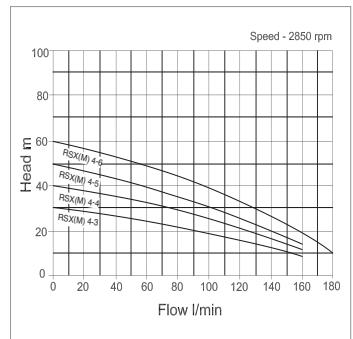

RSX(M)4	Type	Impellers	Body & Casing
	Horizontal multi-stage	Closed	Stainless steel

Pump	Pump body	Pump casing	Diffusers	Impellers
	S/S 304	S/S 304	S/S 304	S/S 304
	Mechanical seal	Outlet casing	Motor support	Shaft
	Carbon ceramic/Viton	S/S 304	Cast iron	S/S 304

Motor	Poles	Enclosure	Insulation
	2 pole	IP55	Class F


RSXM4-4

item code	model	inlet (BSPF)	outlet (BSPF)	kW	volt	flow (l/min)	head (mtrs)	w x l x h (mm)	dry weight (kgs)
19-15-1272	RSXM4-3	1¼"	1"	0.55	230	160	30	143x362x216	10
19-15-1184	RSX4-3	1¼"	1"	0.55	400	160	30	143x362x216	10
19-15-1294	RSXM4-4	1¼"	1"	0.75	230	160	40	143x389x216	10.5
19-15-1208	RSX4-4	1¼"	1"	0.75	400	160	40	143x389x216	10.5
19-15-1169	RSXM4-5	1¼"	1"	0.75	230	160	50	143x416x216	11
19-15-1210	RSX4-5	1¼"	1"	0.75	400	160	50	143x416x216	11
19-15-1086	RSXM4-6	1¼"	1"	1.1	230	180	60	143x443x216	12
19-15-1150	RSX4-6	1¼"	1"	1.1	400	180	60	143x443x216	12

PREMIUM EFFICIENCY MOTORS (IE3) AVAILABLE FOR MODELS FROM 1.1kW 400v (P.O.A.)