



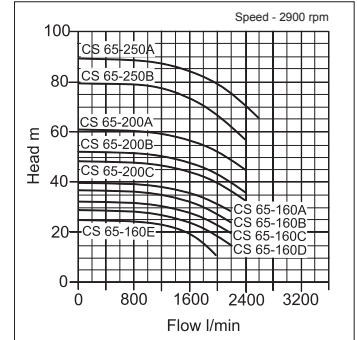

CS 65

STANDARDISED - CAST IRON

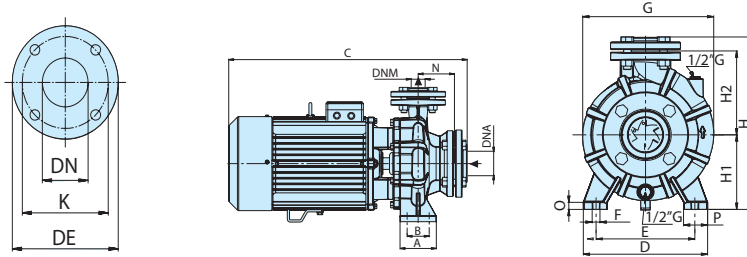



DIMENSIONS (mm)				
DN	DE	K	HOLES	
			QTY	Ø
65	185	145	4	18
80	200	160	8	18

item code	model (3PH 230v-400v)	output (kW)	flow (l/min)	head (mtrs)	DNM	DNA	A	B	C	D	E	F	G	H	H1	H2	N	O	P	weight (kgs)
19-15-1039	CS 65-160 E	5.5	2000	25	65	80	125	95	610	280	212	15	295	395	160	200	100	18	65	70
19-15-1015	CS 65-160 D	7.5	2200	29	65	80	125	95	610	280	212	15	295	395	160	200	100	18	65	80
19-15-1113	CS 65-160 C	9.2	2200	33	65	80	125	95	750	280	212	15	340	425	160	200	100	18	65	84
19-15-1286	CS 65-160 B	11	2200	36	65	80	125	95	750	280	212	15	340	425	160	200	100	18	65	90
19-15-1058	CS 65-160 A	15	2200	40	65	80	125	95	750	280	212	15	340	425	160	200	100	18	65	120
19-15-1002	CS 65-200 C	15	2400	48	65	80	125	95	745	320	250	15	335	445	180	225	100	18	65	122
19-15-1088	CS 65-200 B	18.5	2400	53	65	80	125	95	790	320	250	15	335	445	180	225	100	18	65	138
19-15-1187	CS 65-200 A	22.5	2400	61	65	80	125	95	825	320	250	15	360	455	180	225	100	18	65	148
19-15-1076	CS 65-250 B	30	2400	79	65	80	160	120	825	360	280	18	370	485	200	250	100	18	85	235
19-15-1180	CS 65-250 A	37	2600	89	65	80	160	120	825	360	280	18	370	485	200	250	100	18	85	250

PREMIUM EFFICIENCY MOTORS (IE3) AVAILABLE FOR ALL MODELS (P.O.A.)

CS 80

STANDARDISED - CAST IRON

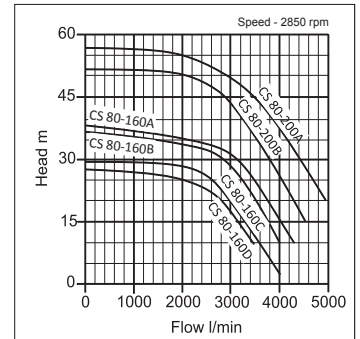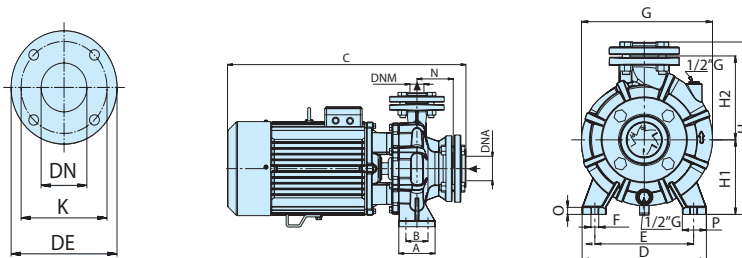

DIMENSIONS (mm)				
DN	DE	K	HOLES	
			QTY	Ø
80	200	160	8	18
100	225	180	8	18

item code	model (3PH 230v-400v)	output (kW)	flow (l/min)	head (mtrs)	DNM	DNA	A	B	C	D	E	F	G	H	H1	H2	N	O	P	weight (kgs)
19-15-1244	CS 80-160 D	11	3500	28	80	100	125	95	790	320	250	15	350	445	180	225	125	18	65	99
19-15-1026	CS 80-160 C	15	4000	30	80	100	125	95	790	320	250	15	350	445	180	225	125	18	65	129
19-15-1200	CS 80-160 B	18.5	4000	37	80	100	125	95	835	320	250	15	350	445	180	225	125	18	65	143
19-15-1061	CS 80-160 A	22.5	4350	39	80	100	125	95	870	320	250	15	360	445	180	225	125	18	65	152
19-15-1271	CS 80-200 B	30	4550	53	80	100	125	95	900	345	280	15	360	470	180	250	125	18	65	233
19-15-1165	CS 80-200 A	37	5000	57	80	100	125	95	900	345	280	15	360	470	180	250	125	18	65	247

PREMIUM EFFICIENCY MOTORS (IE3) AVAILABLE FOR ALL MODELS (P.O.A.)