



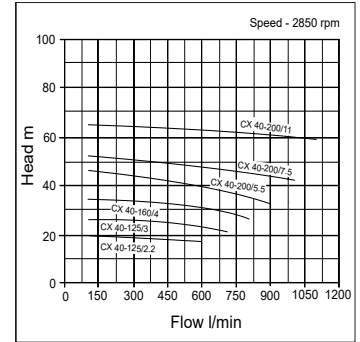

CX 40

STANDARDISED - STAINLESS STEEL

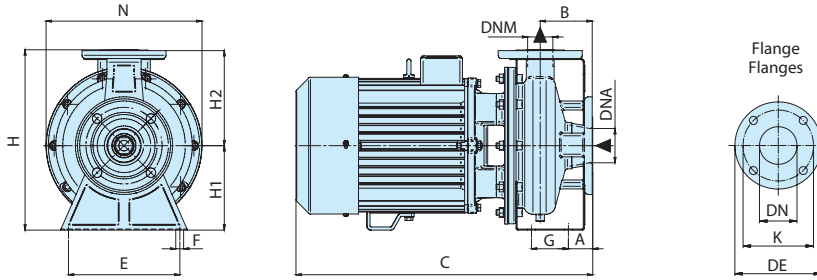



DIMENSIONS (mm)				
DN	DE	K	HOLES	
			QTY	Ø
40	150	110	4	18
150	185	145	4	18

item code	model (3PH 230v-400v)	output (kW)	flow (l/min)	head (mtrs)	DNM	DNA	A	B	C	E	F	G	H	H1	H2	N	weight (kgs)
19-15-1036	CX40-125/2.2	2.2	600	22	40	65	34	79	441	160	15	70	255	112	142	213	26
19-15-1161	CX40-125/3	3	700	27	40	65	34	79	478	160	15	70	255	112	142	213	33
19-15-1123	CX40-160/4	4	800	33	40	65	34	79	501	160	15	70	280	112	142	230	38
19-15-1157	CX40-200/5.5	5.5	900	44	40	65	47	99	565	212	15	70	345	160	184	297	62
19-15-1136	CX40-200/7.5	7.5	1000	54	40	65	47	99	565	212	15	70	345	160	184	297	67
19-15-1001	CX40-200/11	11	1100	65	40	65	47	99	705	212	15	70	410	160	184	315	104

PREMIUM EFFICIENCY MOTORS (IE3) AVAILABLE FOR ALL MODELS (P.O.A.)

CX 50

STANDARDISED - STAINLESS STEEL

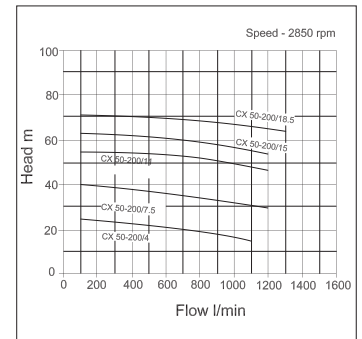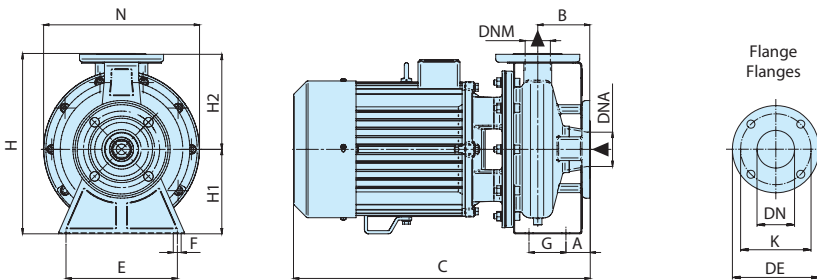

DIMENSIONS (mm)				
DN	DE	K	HOLES	
			QTY	Ø
50	165	125	4	18
65	185	145	4	18

item code	model (3PH 230v-400v)	output (kW)	flow (l/min)	head (mtrs)	DNM	DNA	A	B	C	E	F	G	H	H1	H2	N	weight (kgs)
19-15-1055	CX50-125/4	4	1100	27	50	65	42	85	520	212	15	70	300	132	165	254	45
19-15-1075	CX50-200/7.5	7.5	1200	41	50	65	47	99	565	212	15	70	350	160	180	297	67
19-15-1003	CX50-200/11	11	1200	55	50	65	47	99	706	212	15	70	410	160	180	315	103
19-15-1153	CX50-200/15	15	1200	63	50	65	47	99	706	212	15	70	410	160	180	315	111
19-15-1139	CX50-200/18.5	18.5	1300	71	50	65	47	99	751	212	15	70	410	160	180	315	124

PREMIUM EFFICIENCY MOTORS (IE3) AVAILABLE FOR ALL MODELS (P.O.A.)